


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PROD CODE	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
4092	DF	SO				G	REV PER 0600-6145-97 CT	4-97	SG

PART NO.	A	CUSTOMER PART NO.
868487-1	8.00 [203.2]	N30003LH-8
868487-2	17.00 [431.8]	N30003LH-3
868487-3	15.00 [381.0]	-
868487-4	12.00 [304.8]	N30003LH-4
868487-5	9.50 [241.3]	N30003LH-5
868487-6	14.00 [355.6]	N30003LH-6
868487-7	16.00 [406.4]	N30003LH-7
868487-8	12.50 [317.5]	-

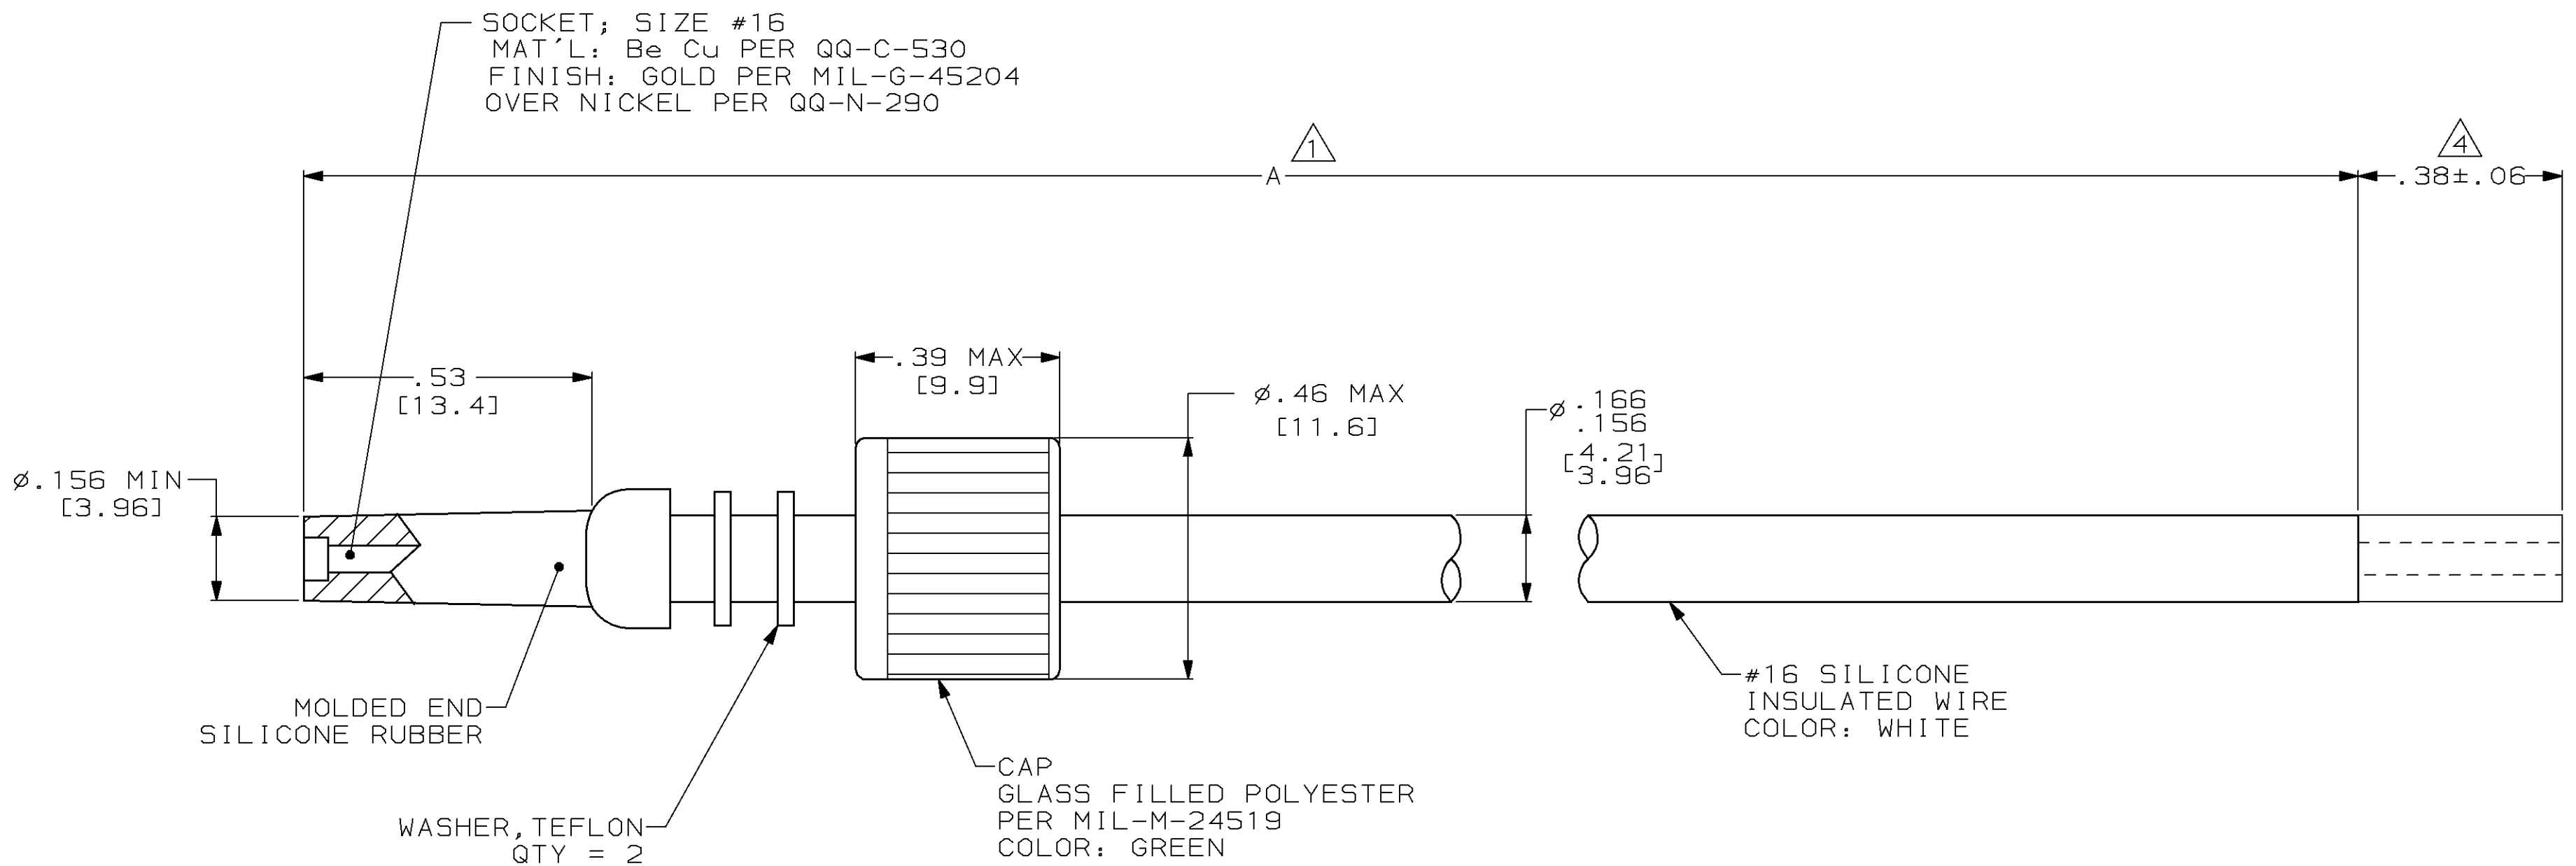

- 1. TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [±3.0]
24 INCHES [609.6] & UP = ±1%
- 2. MARKED PER MIL-STD-130 INCLUDING CUSTOMER PART NO. PER TABLE.
- 3. TO MATE WITH AMP LGH-1/2 RECEPTACLE WITH .53 [13.4] BARREL DEPTH.
- 4. INSULATION CUT AT THIS LOCATION; NOT REMOVED.
- 5. OPERATING VOLTAGE: 10 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± - ANGLES ± -	DR 2-12-90 C.C. THOMAS	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK 8-10-91 S. GLATFELTER		
MATERIAL SEE CALLOUTS	APPD 8-10-91 S. GLATFELTER	NAME LEAD ASS'Y, SGL. MOLDED END, LGH-1/2	
	APPD 8-10-91 S. GLATFELTER	SIZE C	CAGE CODE 00779
FINISH -	APPLICATION SPEC -	DRAWING NO 868487	SHEET 1 OF 1
	WEIGHT -	SCALE 4:1	