

# FLK 16-24-DV-AI-EZ-DR-S/... - Cable



2318253

<https://www.phoenixcontact.com/pc/products/2318253>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Assembled shielded round cable; controller: Emerson Delta V; connection 1: IDC/FLK socket strip (1x 24-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: variable



## Commercial data

Item number	2318253
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	CK2152
GTIN	4046356319256
Customs tariff number	85444290
Country of origin	DE

## Technical data

### Product properties

Product type	System cable
--------------	--------------

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP00
Degree of protection (Installation location)	≥ IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 70 °C (fixed installation)
	-10 °C ... 70 °C (flexible installation)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m

### Electrical properties

Operating voltage (AC)	≤ 30 V AC
Operating voltage (DC)	≤ 60 V DC
Nominal operating mode	100% operating factor
Current (Per path, 50°C)	≤ 1 A (Uncoiled, see derating)
Current (Per path, 70°C)	≤ 0.6 A (Uncoiled, see derating)

### Cable/line

Cable length	variable
--------------	----------

#### 16X0.14 [PVC]

Number of positions	16
Shielded	yes
Cable type	16X0.14 [PVC]
Conductor type	Assembled shielded round cable
Conductor structure signal line	7x 0.16 mm
AWG signal line	26
Conductor cross section	16x 0.14 mm <sup>2</sup>
Wire diameter incl. insulation	1 mm ±0.03 mm
External cable diameter	7 mm ±0.4 mm
Outer sheath, material	Semi-rigid PVC
External sheath, color	gray
Conductor material	Tin-plated Cu litz wires
Cable resistance	≤ 145 Ω/km (20 °C)
Insulation resistance	≥ 20 MΩ*km (20 °C)
Smallest bending radius, fixed installation	74 mm
Smallest bending radius, movable installation	133 mm
Max. bending cycles	5000 (at a radius of ≥ 15x outside diameter)
Halogen-free	no

# FLK 16-24-DV-AI-EZ-DR-S/... - Cable



2318253

<https://www.phoenixcontact.com/pc/products/2318253>

Flame resistance	IEC 60332-1-2 (raw cable)
	VDE 0842, Part 332-1-2 (raw cable)
	IEC 60332-3-22 (raw cable)
	UL VW-1
	CSA FT-1
Resistance to oil	can withstand occasional splashes (raw cable)

## Connection data

### Connection 1

Connection in acc. with standard	based on IEC 60603-13
Connection method	IDC/FLK socket strip
Number of connections	1
Number of positions	24
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

### Connection 2


Connection in acc. with standard	based on IEC 60603-13
Connection method	IDC/FLK socket strip
Number of connections	1
Number of positions	16
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

## Notes

General	For proper use, the specifications of the installation directive (see Downloads) must be observed.
---------	--

Drawings

Diagram

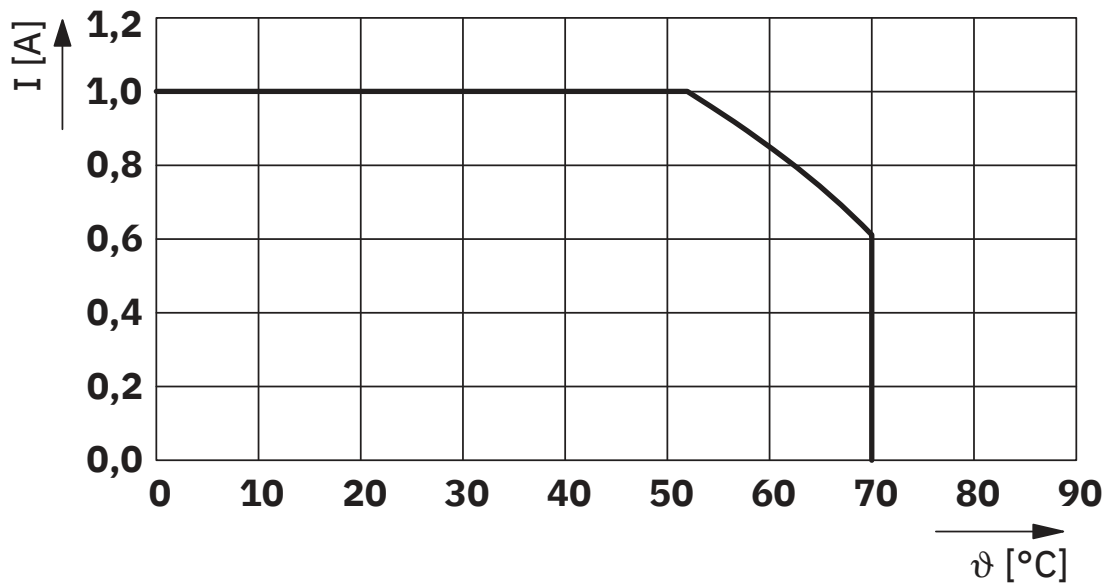

Maximum permissible current per path in uncoiled state

# FLK 16-24-DV-AI-EZ-DR-S/... - Cable





2318253

<https://www.phoenixcontact.com/pc/products/2318253>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2318253>

 <b>UL Listed</b> Approval ID: FILE E 238705				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	125 V	1 A	-	-

 <b>cUL Listed</b> Approval ID: FILE E 238705				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	125 V	1 A	-	-

<b>cULus Listed</b>				
---------------------	--	--	--	--

2318253

<https://www.phoenixcontact.com/pc/products/2318253>

## Classifications

### ECLASS

ECLASS-11.0	27242220
ECLASS-12.0	27242220
ECLASS-13.0	27242220

### ETIM

ETIM 8.0	EC000237
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------

# FLK 16-24-DV-AI-EZ-DR-S/... - Cable



2318253

<https://www.phoenixcontact.com/pc/products/2318253>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)