



環保物料專用
RoHS compliant

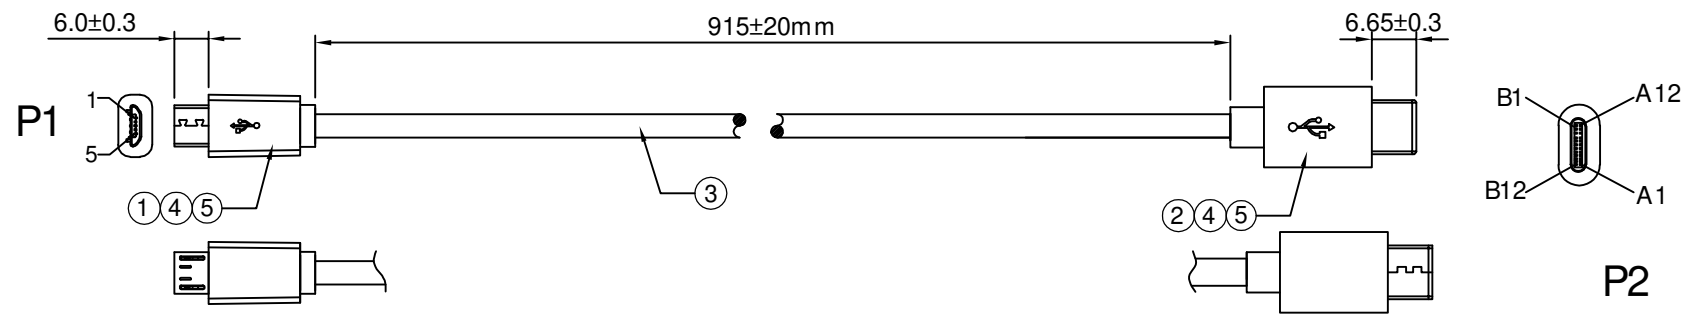


Electrical Character:
100% Open/ Short
Contact Resistance: 3 Ohms Max.
Hi-Pot: 200V AC/0.01S
Insulation Resistance: 10M Ohms Min.

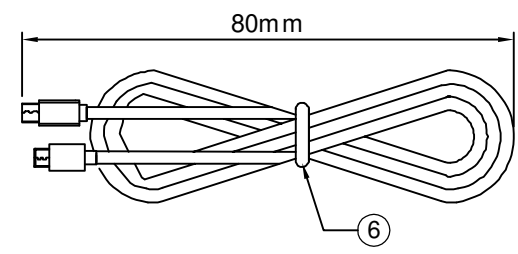

Bill Of Material

No.	Part	Material Name and Name	Unit	Qty
6	TIE	TIE:Black	SET	1
5	Molding	Outer Over Moulding 35P PVC Color:Black	SET	1
4	Molding	internal mold PEColor:translucent	PCS	
3	CABLE	(10/0.10BC ID:0.75 HDPE White、Green)+(33/0.10BC ID:1.0mm PVC RED、BLACK) 75P PVC OD:3.5mm Jacket Color Black	PCS	
2	CONN	USB 3.1 C Type Male,Gold Flash pin,Solder Type,Natural Insulation,resistor 5.1KΩ	SET	1
1	CONN	Micro USB B Male front five back four, PBT Black Solder Type	SET	1

Wire Diagram

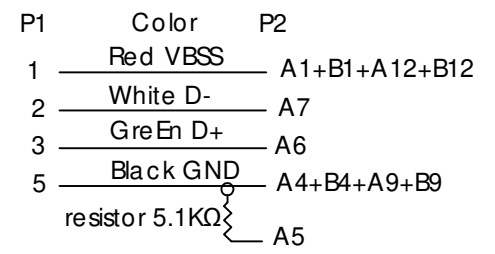

	DESCRIPTION(內容): USB TYPE C TO Micro-USB B Type Male Cable Assembly	DRAWN(製圖): Tom Liu CHECKED(確認): Jack Wu APPROVAL(核准): Kane He	GENERAL TOLERANCE		REV: A/1	REV	DESCRIPTION	DATE				
			LINEAR	ANGLES					UNIT:	1	ORIGINAL	Mar-28-2018
			X.: ±0.50	X°: ±5.0°					mm	2		
			X.X: ±0.20	X.X°: ±3.0°						3		
A4	SCALE(比例): 1:XX	THIRD ANGLE PROJECTION	PART NO: (料號) CBUSB-CM-MCBM-915	X.XX: ±0.15	X.XX°: ±2.0°	SHEET:	4					
			DWG NO(圖號): KWRD180328-091	X.XXX: ±0.10	X.XXX°: ±1.0°	1/2						