
3-647502-5 - ACTIVE

MTA 100

TE Internal #: 3-647502-5 PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Tin, Surface Mount, Signal, Black, MTA 100

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > Nylon Vertical PCB Header: 2.54mm, Surface Mount, MTA 100

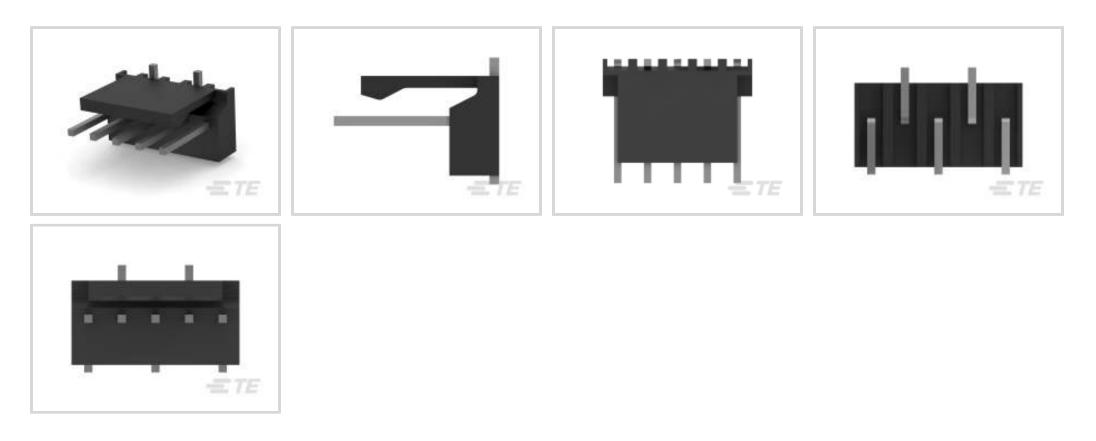

Connector System: Wire-to-Board Number of Positions: 5

Number of Rows: 1

Centerline (Pitch): 2.54 mm [.1 in]

PCB Mount Orientation: Vertical

All Nylon Vertical PCB Header: 2.54mm, Surface Mount, MTA 100 (40)



Features

Product Type Features

Connector System	Wire-to-Board	
Header Type	Partially Shrouded	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
PCB Connector Assembly Type	PCB Mount Header	
Configuration Features		
Number of Positions	5	
Number of Rows	1	
PCB Mount Orientation	Vertical	
Electrical Characteristics		
Operating Voltage	250 VAC	
Body Features		

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Tin, Surface Mount, Signal, Black, MTA 100



Primary Product Color	Black
Contact Features	
Contact Mating Area Length	7.37 mm[.29 in]
Mating Square Post Dimension	.64 mm[.025 in]
Contact Layout	Inline
Contact Mating Area Plating Material Thickness	3.81 – 6.35 μm[150 – 250 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
Contact Mating Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	5 A
Termination Features	
Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Method to Printed Circuit Board	Surface Mount

Mechanical Attachment

Mating Alignment Type	Polarization	
Mating Retention	With	
Panel Mount Feature	Without	
Mating Retention Type	Friction Lock	
Connector Mounting Type	Board Mount	
Mating Alignment	With	
PCB Mount Alignment	Without	
PCB Mount Retention	Without	
Housing Features		
Housing Material	Nylon 4/6	
Centerline (Pitch)	2.54 mm[.1 in]	
Dimensions		
Connector Length	15.24 mm[.6 in]	
Connector Height	8.81 mm[.34 in]	

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Tin, Surface Mount, Signal, Black, MTA 100



PCB Thickness (Recommended)	1.6 mm[.063 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Agency/Standard	CSA, UL
Approved Standards	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	225
Packaging Type	Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Compliant

Product Compliance Disclaimer


EU ELV Directive 2000/53/EC

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Tin, Surface Mount, Signal, Black, MTA 100



Compatible Parts

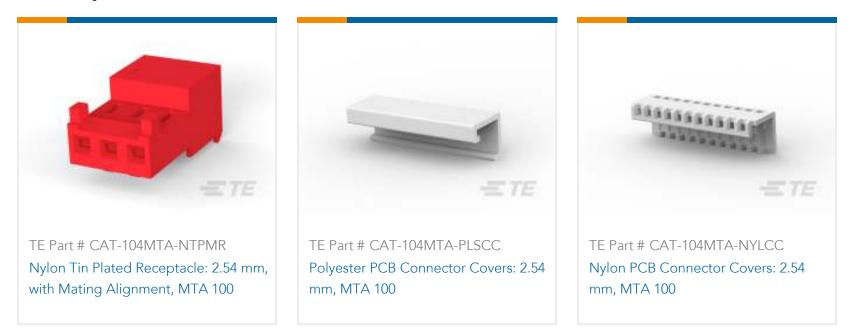

Also in the Series | MTA 100

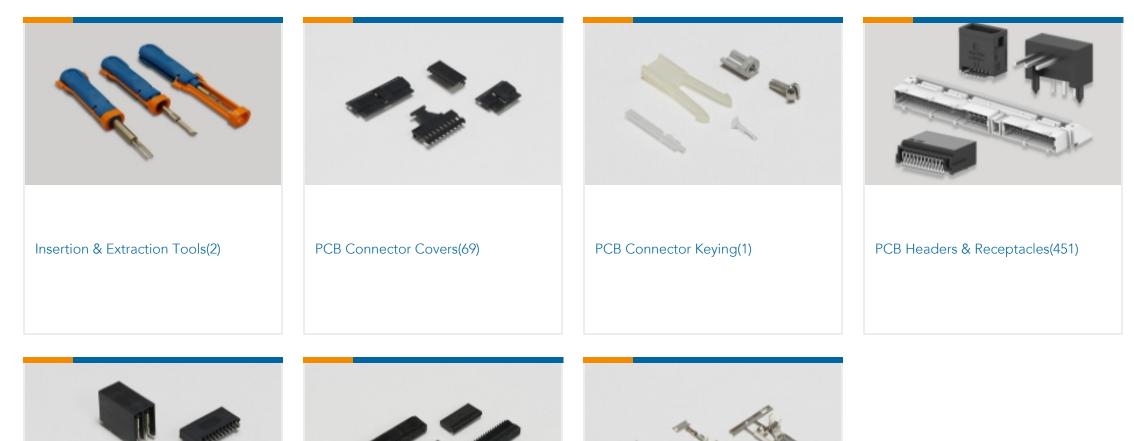

		the the second
Standard Rectangular Connectors(497)	Wire-to-Board Connector Assemblies & Housings(1)	Wire-to-Board Connector Contacts(8)

Customers Also Bought



PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Tin, Surface Mount, Signal, Black, MTA 100





TE Part #3-647502-2 02P MTA100 HDR ASSY,SM,FL,SN

Documents

Product Drawings

05P MTA100 HDR ASSY,SM,SN, LF

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_3-647502-5_E_c-3-647502-5-e.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-647502-5_E_c-3-647502-5-e.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-647502-5_E_c-3-647502-5-e.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English

Agency Approvals Agency Approval Document

English