


Pin Assignment

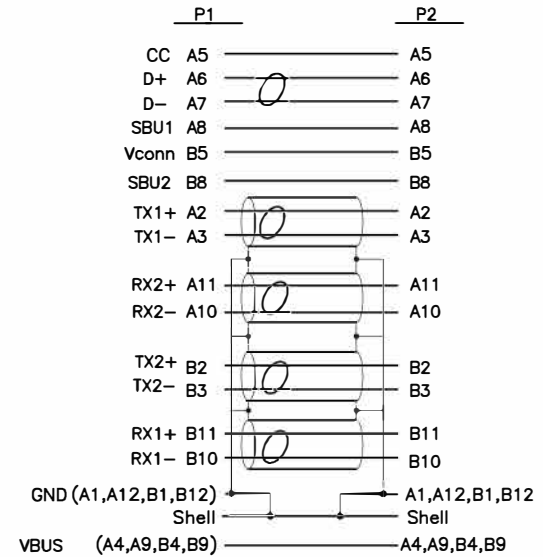

Electrical Test:

1. 100% Real machine test

Resolution support 4K@60Hz MAX

8	Inside Molding: PE	2	g							
7	Outside Molding: 45P PVC Color:White	10	g							
6	USB3.1 Type C ABS Shell Color:White	1	pcs		TOLERANCE			TITLE: USB3.1 TYPE C TO HDMI F	CUSTOMER : CUSTOMER P/N : USBC-HDMIF- ADPT	
5	HDMI AF ABS Shell Color:White	1	pcs		.X	.015				.30
4	USB3.1 Type C Connector With tinplate	1	pcs		.XX	.010				.10
3	USB3.1 Type C Connector With PCB Nickel plated	1	pcs	.XXX	.005	.05				
2	UTC-UH01-L With PCB Shell Nickel plated IC:PS176 QFN-48PIN	1	pcs	DRAWN BY	Hong					
1	USB 3.1~[34AWG(7/0.06TC)+EAM]*4P+34AWG(7/0.06TC)*2C+28AWG(7/0.127TC)*2C+34AWG(7/0.06TC)*4C+AB(16/9/0.06TC 75%TC)ØD3.9MM Color:White	0.15	m	CHECK BY			SCALE	NONE	DRAWING NO. :	REV. A1
NO	DESCRIPTION	Q'TY	UNIT	APPD BY			UNIT	MM		
							DATE	2020.01.10		