




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY


PART NO.		RFN-1009-I		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	JDMc	3/19/03	JDMc
A	CHANGE FINISH CALLOUT	CZS	6/10/10	JDMc

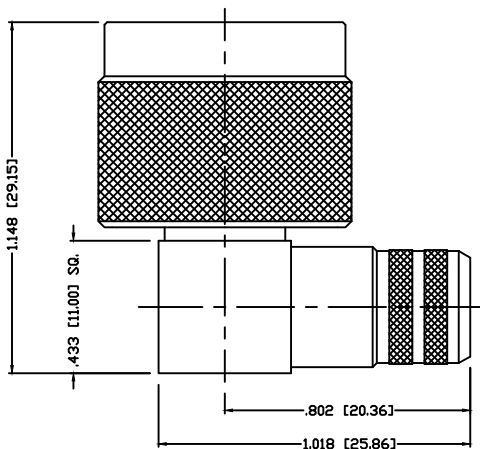

END CAP



RECOMMENDED CRIMP DIE: .429"

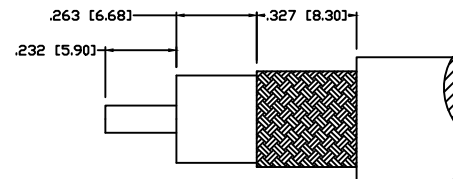

RECOMMENDED CABLE STRIP DIMENSIONS

CABLE CENTER CONDUCTOR TO BE SOLDERED
 DIRECTLY TO CONNECTOR CENTER CONDUCTOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-11 GHz
 VSWR: <1.2 THRU 6 GHz
 INSERTION LOSS: .06 dB Max. X \sqrt{f} GHz
 WORKING VOLTAGE: 1k V rms @ sea level
 TEMPERATURE RANGE: -65°C TO 165°C
 INSULATION RESISTANCE: 5k M Ohms min.
 FOR: BELDEN 9913, COMMSCOPE BWC-400R, TIMES AA-5886, AA-6147, LMR-400

1	SHELL	1	BRASS	WHITE BRONZE, 80 μ "	000486	UNLESS OTHERWISE SPECIFIED:
2	RETAINING RING	1	BRASS	WHITE BRONZE, 80 μ "		
3	BODY	1	BRASS	WHITE BRONZE, 80 μ "		
4	FERRULE STUD	1	BRASS	WHITE BRONZE, 80 μ "		
5	PIN	1	BRASS	GOLD, 30 μ "		
6	INSULATOR	1	PTFE	----		
7	GASKET	1	SILICONE	----		
8	FERRULE	1	BRASS	WHITE BRONZE, 80 μ "		
9						
10					DRAWN	
11					C. ZUNIGA	6/10/10
12					CHECKED	
13					ORJ DRAWN	
14					JDMc	3/19/03
#	DESCRIPTION	QTY	MATRL	FINISH	APPROVALS	DATE

DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED
 TOLERANCES ARE:
 DECIMALS DIAMETER

RF connectors 7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

N PLUG RIGHT ANGLE
 SOLDER/CRIMP

SIZE	CABLE GROUP	DWG NO.	REV
A	I	RFN-1009-I	A
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1