



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2250 MHz Suspended Stripline High Pass Filter

Part Number: AE2250SSH6550



Electrical Specifications

Cut Off Frequency: 2.25GHz
Pass Band Frequency: 2.25~14GHz
Pass Band Insertion Loss:
 $\leq 2.0\text{dB}$ @ 2.25~2.45GHz
 $\leq 1.0\text{dB}$ @ 2.45~14GHz
Pass Band VSWR: $\leq 1.5:1$
Stop Band Attenuation: $\geq 60\text{dB}$ @ DC~1.93GHz
Impedance: 50 Ohms
Power Handling: $\leq 15\text{W}$


Mechanical

Mounting Method: Through Holes
Connector Type: SMA-Female
Dimensions: 52 x 32 x 10 mm

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

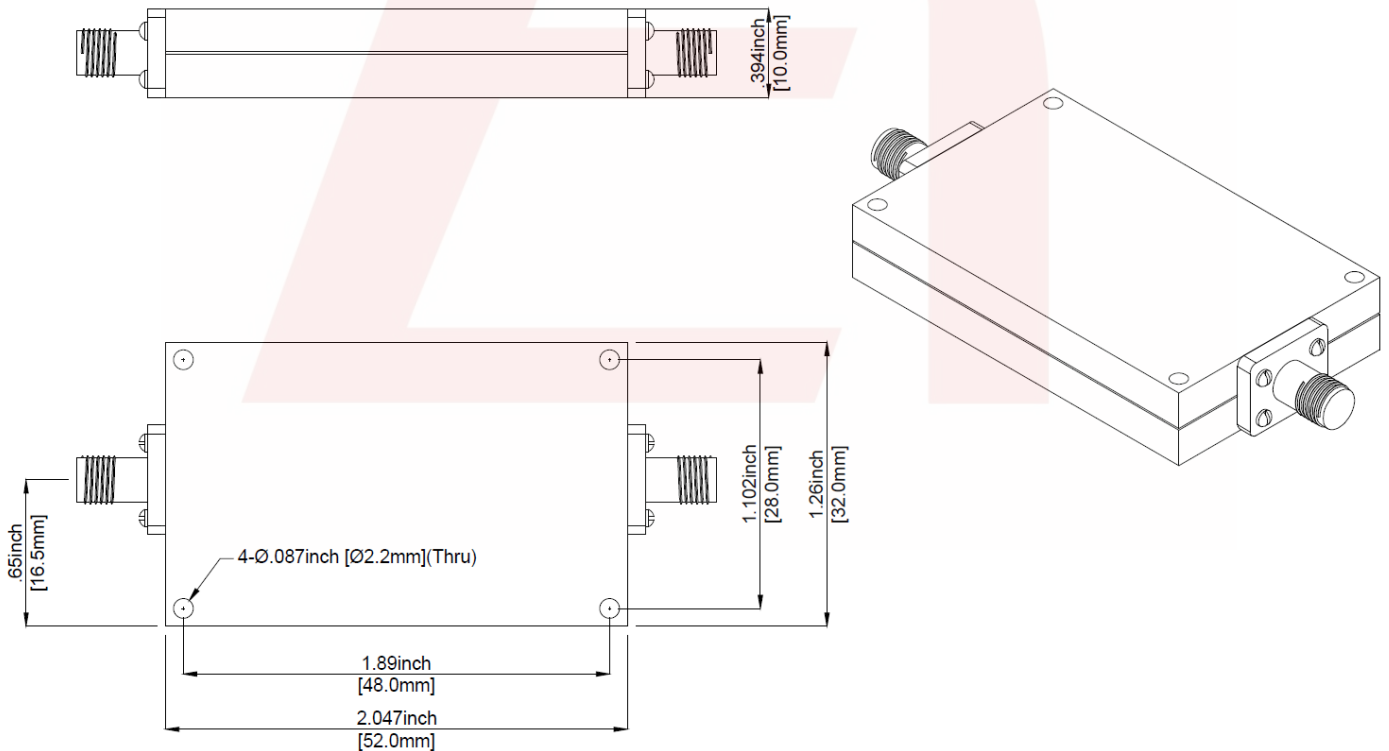

DS-SSH6550-01252019-Rev0

70 Outwater Lane Phone: (973) 772-4242
 Garfield, NJ 07026 Fax : (973) 321-3941

Email: sales@anatechelectronics.com
 Web: www.anatechelectronics.com