


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE		PS
B	REDRAW, RFS.6538, BS	06/28/05	BS
C	CORRECT LABEL, DRAWING, RFS. 6586, BS	06/30/05	BS

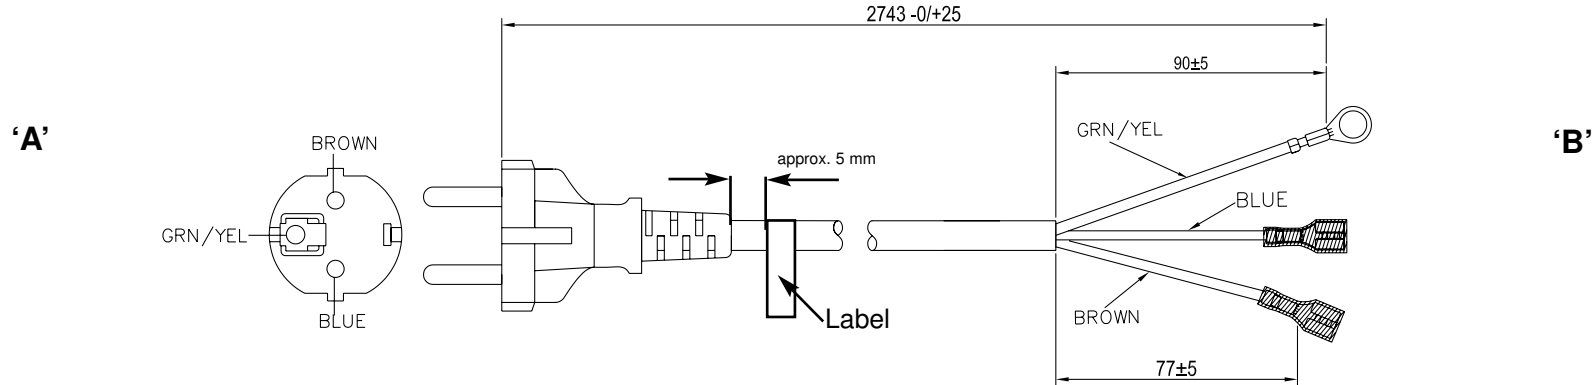

**GENERAL SPECIFICATIONS:**

RATING: 10A / 250V AC  
 CABLE TYPE / SIZE: H05VV-F, # 3 x 0.75 mm<sup>2</sup>  
 TEMPERATURE RATING: 70° C MIN.  
 CONDUCTOR COLORS: BLUE/ BROWN / GREEN-YELLOW  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 2743 ± 50 mm  
 CABLE OUTER DIAMETER: 7.0 ± 0.15 mm  
 END 'A' PLUG: CEE 7/7 RIGHT ANGLE  
 END 'B': SEE TERMINATION TABLE  
 APPROVALS PLUG: VDE, N, S, D, FI, KEMA, UTE, CEBC, OVE, IMQ  
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, SEV, CEBC, OVE,

**PACKING:  
 HANKING**



**NOTES:**

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



**CONDUCTOR TERMINATION TABLE:**

Wire	Color	ROJ± 5 mm	RIJ±1mm	Terminal
NEUTRAL	BLUE	77	-	0.25" INSULATED FASTON K.S. P/N: FDFN1-250 OR EQUIV.
LINE	BROWN	77	-	0.25" INSULATED FASTON K.S. P/N: FDFN1-250 OR EQUIV.
GROUND	GRN/YELLOW	90	-	# 8 RING WITH BLUE INSUL. BARREL P/N: R1-4SV OR EQUIV.



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		<b>GlobTek, Inc.</b> 186 Veterans Dr. Northvale, NJ 07647 www.globtek.com Tel. 201-784-1000 Fax 201.784.0111
		<b>MILLIMETERS ANGULAR</b> .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: BS	DATE: 06/28/05	<b>DWG TITLE: EUROPEAN NON-DETACHABLE CORDSET</b> CUSTOMER P/N: 0650		REV. C
DRAWN: NF	DATE: 06/28/05	FSCN No.: G, CC, YL	SIZE A	
APRVD: DMR	DATE: 06/28/05	SCALE: NONE	PART NO: 23144262M700T	SHEET 1/2

Foot Note:  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.


Limitation of Use:  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

PROPRIETARY INFORMATION:  
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


**WARNING LABEL**

FOLD HERE

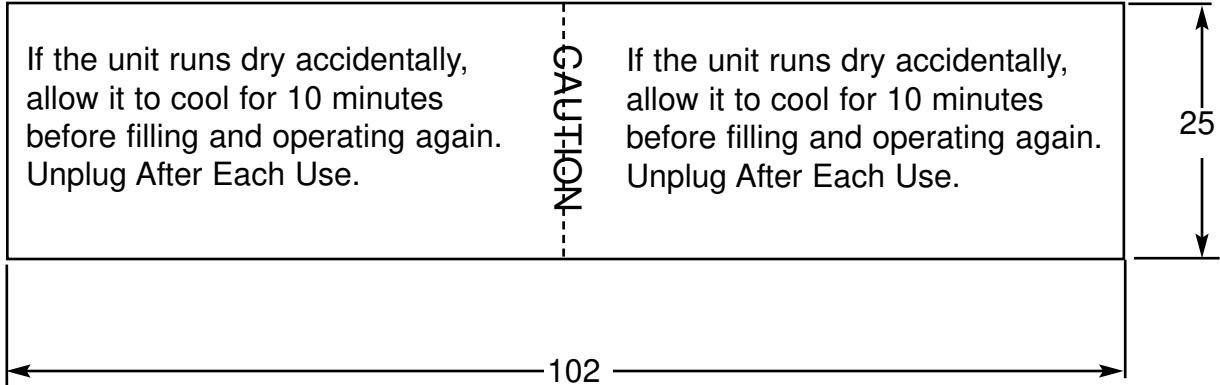

NOTE:

- 1. All dimensions in mm, tolerance: + 1 mm.
- 2. Label material must be Tyvek or similar tear resistant waterproof material.
- 3. Label must be self-adhesive to wrap around cord.
- 4. Label must be folded with no exposed adhesive.
- 5. Label approx. 5 mm from plug.
- 6. Times New Roman Bold Letter font of 12 to 14 should be used.

 <b>GlobTek, Inc.</b> 186 Veterans Dr. Northvale, NJ 07647 www.globtek.com Tel. 201-784-1000 Fax 201.784.0111	
DWG TITLE: EUROPEAN NON-DETACHABLE CORDSET CUSTOMER P/N: 0650	
	REV. C
PART NO: 23144262M700T	SHEET 2/2