

Shock-Safe Fuseholder, 5 x 20 mm, Fingergrasp, Rear-Side, NF, IP 40 / IP 67



250 VAC · 1.5 W/6.3 A (NF)

**Description**

- Screw type fuse carrier

Standards

- NF C 93-436 - Model HB01
 - Contrôle de Conformité de Qualité (CCQ)

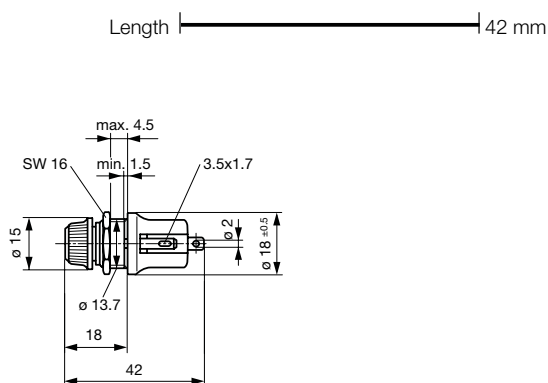
References[General Product Information](#)**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#),
[Distributor-Stock-Check](#)

Technical Data

Fuse-Link	5 x 20 mm
Mounting	Panel Mount, Rear-Side
Fastening	Fixing Nut
Terminal	Solder
Rated Voltage	250 VAC
Rated Current	6.3 A (NF)
Rated Power Acceptance IEC	1.5 W / 6.3 A @ Ta 23 °C
Degree of Protection	IP 40 / IP 67
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Unit Weight (Socket/Cap)	16 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Voltage Rating, Current Rating, HB1

Soldering Methods	Iron
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phases D and F
Admissible Torque on Fixing Nut	max 1.0 Nm
Panel Thickness s	max 4.5 mm

Dimensions

Mounting holes

Variants[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Holder	Cap	Degree of Protection	GAM T1 NNO	Reference	Order Number
●	Fingergrasp	IP 40	● ● ●	23316P	7091.1510
●	Fingergrasp	IP 67		23316ERJJP	7091.1520

Packaging Unit Bulk (10 pcs.)