

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	NEW RELEASE	20NOV07	ZZQ	LZ

mating height: 2.5 MAX

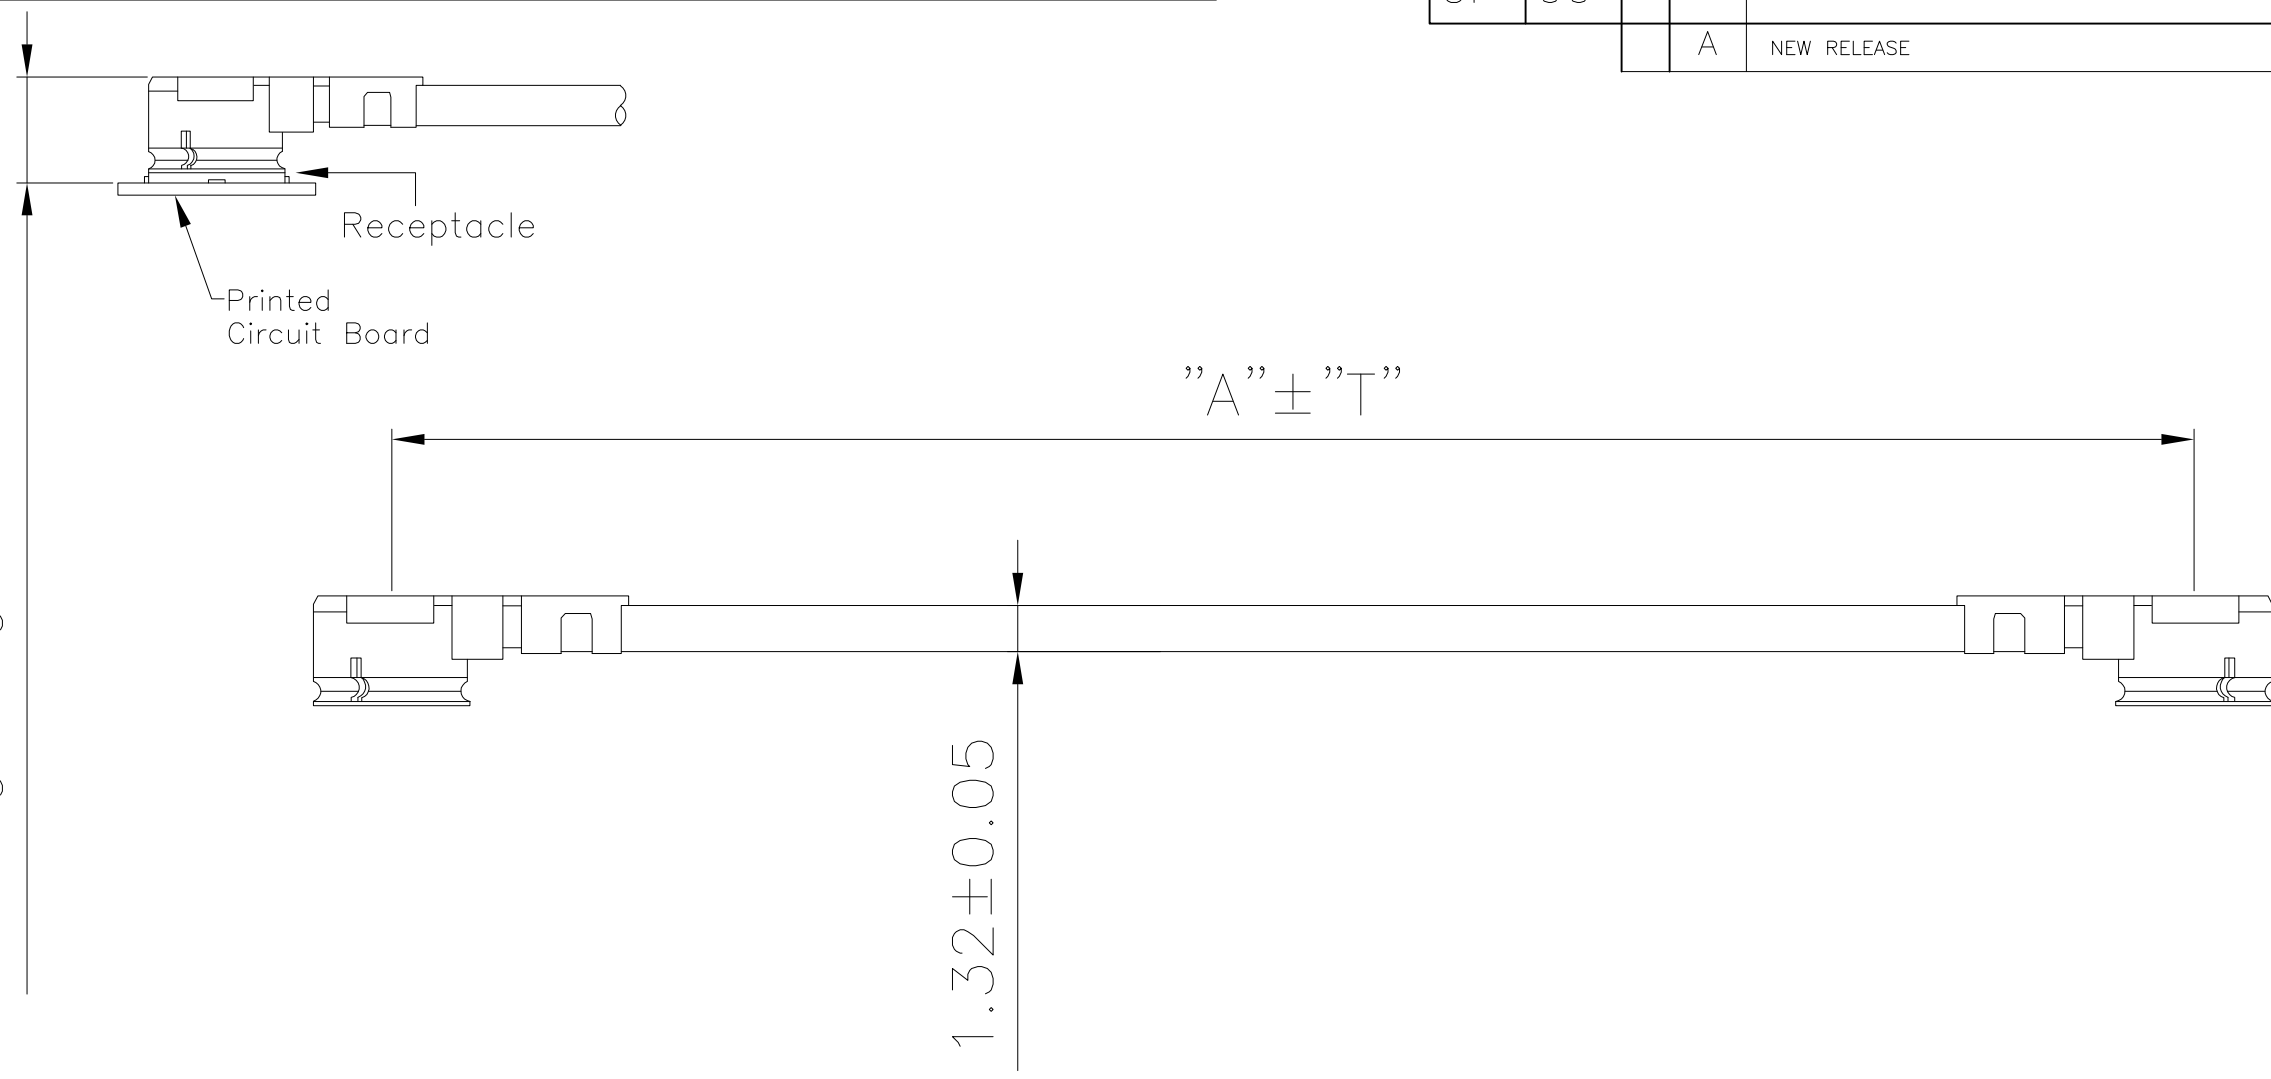

NOTES:

- CABLE ASSEMBLY TO BE 100% TESTED FOR OPEN, SHORT & CONTINUITY  
 HI-POT: 200 VDC FOR 100ms  
 INSULATION RESISTANCE: 50M OHMS MIN  
 CONTINUITY RESISTANCE: 2 OHMS MAX  
 FREQUENCY RANGE: DC TO 6 GHz  
 VSWR: 1.5:1 MAX

PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

2	50	2015700-3
3	200	2015700-2
2	100	2015700-1
TOLERANCE "T" (mm)	LENGTH "A" (mm)	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ZhaoZhiqiang 20NOV07	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm [INCHES]		CHK Michael Han 20NOV07				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JEFF ORNER 20NOV07	NAME RF C/A, UMCC TO UMCC, TYPE III, 1.32MM CABLE			
		PRODUCT SPEC	-			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC	-			
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-		-	A3	00779	G-2015700	-
FINISH		CUSTOMER DRAWING		SCALE	SHEET	REV
-				N.T.S.	1 OF 1	A