

In case of consideration for using Automatic equipment/device which demand high reliability, kindly contact our sales window correspondents.


△	△	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

<b>APPLICATION STANDARD</b>		OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C
<b>RATING</b>		VOLTAGE	AC 50 V	OPERATING HUMIDITY RANGE	RELATIVE HUMIDITY: 95 % MAX (NO DEW CONDENSATION IS PERMITTED)
		CURRENT	0.3 A		

**SPECIFICATIONS**

ITEM	TEST METHOD	REQUIREMENT	QT/AT
<b>CONSTRUCTION</b>	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING	X X X
<b>GENERAL EXAMINATION</b>	CONFIRMED VISUALLY.		X X X
<b>ELECTRICAL CHARACTERISTICS</b>			
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz)	70 mΩ MAX.	X X X
INSULATION RESISTANCE	100 V DC	100 MΩ MIN.	X X X
VOLTAGE PROOF	150 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN	X X X
<b>MECHANICAL CHARACTERISTICS</b>			
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR	INSERTION FORCE: 60 N MAX. WITHDRAWAL FORCE: 2.5 N MIN.	X X X
MECHANICAL OPERATION	50 TIMES INSERTION AND EXTRACTATIONS.	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X X X
VIBRATION	FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, $m/s^2$ AT 10 CYCLES FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 1 μs MIN 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X X X
SHOCK	490 m/s <sup>2</sup> DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.	2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X X X

<b>ENVIRONMENTAL CHARACTERISTICS</b>			
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90~95 %, 96 h	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X X X
RAPID CHANGE OF TEMPERATURE	TEMPERATURE: -55→-15~35→85→15~35°C TIME: 30→2~3→30→2~3 min. UNDER 5 CYCLES.		X X X
DRY HEAT	EXPOSED AT 85 °C, 96 h	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X X X
COLD	EXPOSED AT -55 °C, 96 h		X X X
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h	NO HEAVY CORROSION.	X X X
SULPHUR DIOXIDE	EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090)	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO HEAVY CORROSION.	X X X
RESISTANCE TO SOLDERING HEAT	REFLOW: RECOMMENDED TEMPERATURE PROFILE	NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT	X X X

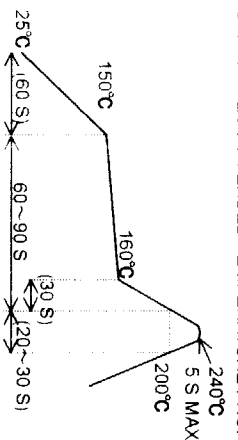

<b>SOLDERABILITY</b>	TO BE TESTED UNDER THE ABOVE CONDITIONS. SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.	NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.	X
----------------------	---	--	---

<b>REMARKS</b>		<b>DRAWN</b>	<i>J. Hatakeyama</i>	<b>DESIGNED</b>	<i>J. Hatakeyama</i>	<b>CHECKED</b>	<i>M. Sakai</i>	<b>APPROVED</b>	<i>M. Sakai</i>	<b>RELEASED</b>					
UNLESS OTHERWISE SPECIFIED, REFER TO JIS C 5402.															
NOTE: Q.T. QUALIFICATION TEST AT ASSURANCE TEST X: APPLICABLE TEST															
<table border="0"> <tr> <td>02.01.15</td> <td>02.01.15</td> <td>02.01.17</td> <td>02.01.17</td> </tr> </table>												02.01.15	02.01.15	02.01.17	02.01.17
02.01.15	02.01.15	02.01.17	02.01.17												

<b>HIROSE</b>	<b>SPECIFICATION SHEET</b>	<b>PART NO.</b>	<b>FX11B - 100P - SV0.5 (22)</b>
HIROSE ELECTRIC CO. LTD.	DRAWING NO.	ELC4 - 152628 - 02	CODE NO.
CL			CL 573 - 0653 - 5 - 22

TO PCK