



2600 MHz Cavity Bandpass Filter



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AB2600B591

Electrical specifications

Center Frequency: 2600 MHz
Insertion loss: 0.35 dB, 2500 MHz-2700 MHz
Return loss: 18 db, 2500 MHz-2700 MHz
1 dB bandwidth: 220 MHz
Attenuation: 20 dB @ 2340 MHz and 2860 MHz
Power: 10 W average, 40 W peak


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 56 X 56 X 30 mm

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

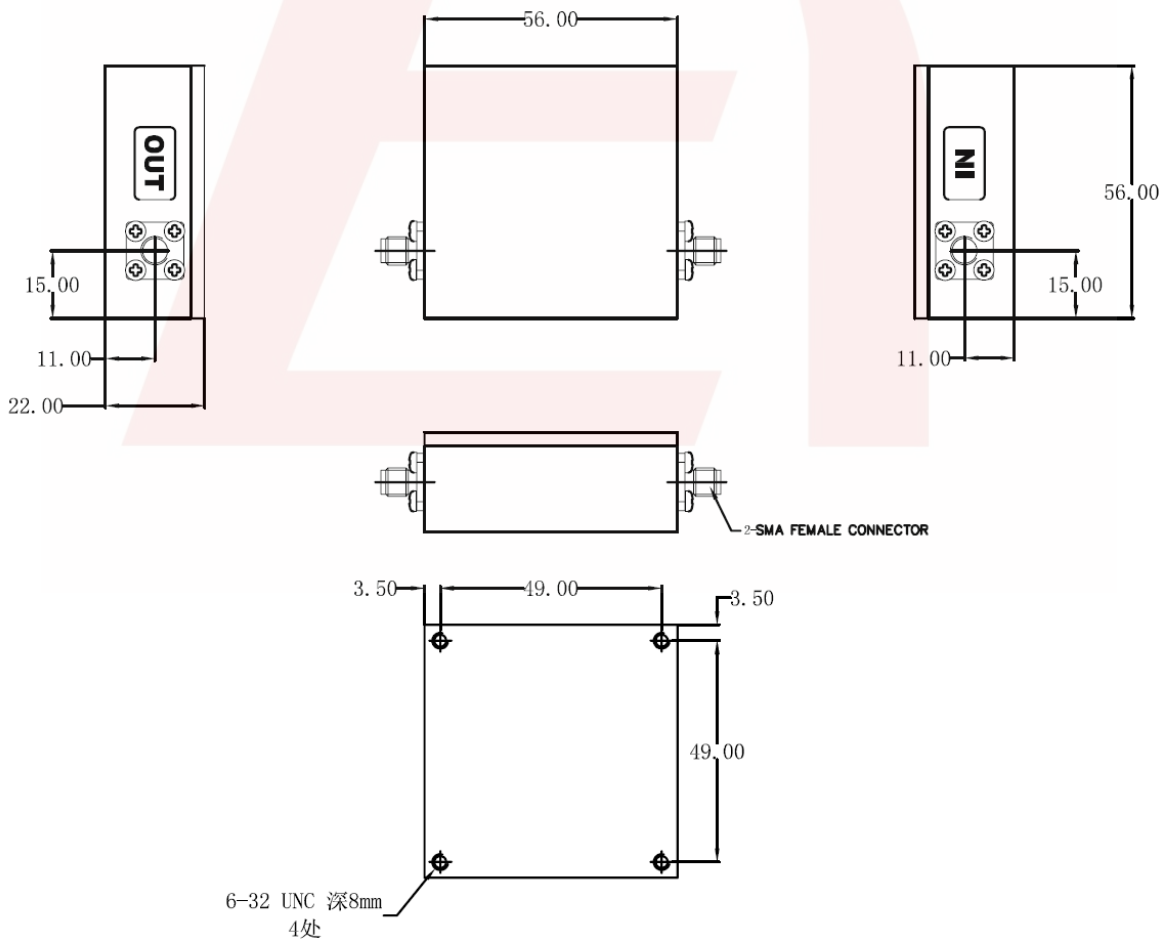

DS-B591-03152018-Rev0