

Ratings

Voltage: 300 V
 Temperature: -25 to 80 °C
 Flammability: VW-1

Conductor

Conductor count: 4
 Gauge: 26 AWG 0.14 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 mm x 7

Insulator

Material: PVC
 Color: yellow, white, black, red
 Diameter: Ø 1.1 ± 0.10 mm
 Nominal thickness: 0.38 mm

Drain

Stranding: Ø0.16 mm x 7, 26 AWG

Shield

Type: foil + braided
 Material: aluminum mylar, tinned copper strands
 Stranding: Ø0.127 mm
 Coverage: 80% minimum

Outer jacket



Material: PVC, 80A
 Color: white
 Diameter: Ø 5 ± 0.30 mm
 Nominal thickness: 0.8 mm

Wire marking: E339579 UL AWM STYLE 2464 26 AWG 80°C
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

Tests

Voltage test: 300 V
 Spark test: 3.0 kV
 Max resistance at 20 °C: 150 ohm/km
 Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C / 1 hour, no observed degradation
 Deformation: 121 ± 1 °C / 1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C / 1 hour, no observed cracking
 Dielectric test: 2000 Vac for 1 minute without breakdown

Use: Internal wiring or external interconnection of electronic equipment.

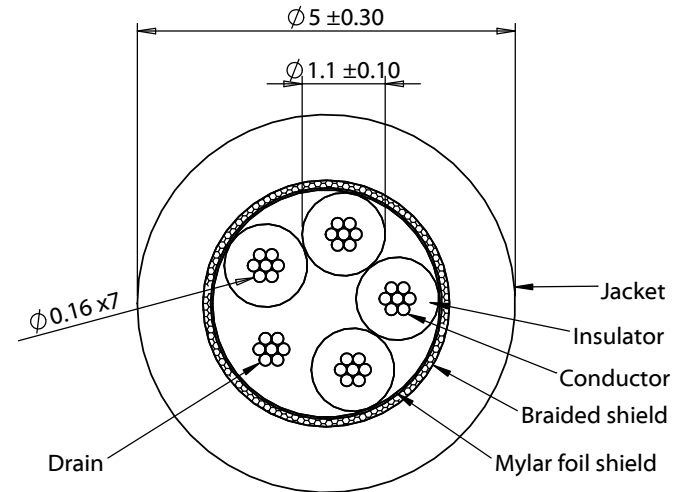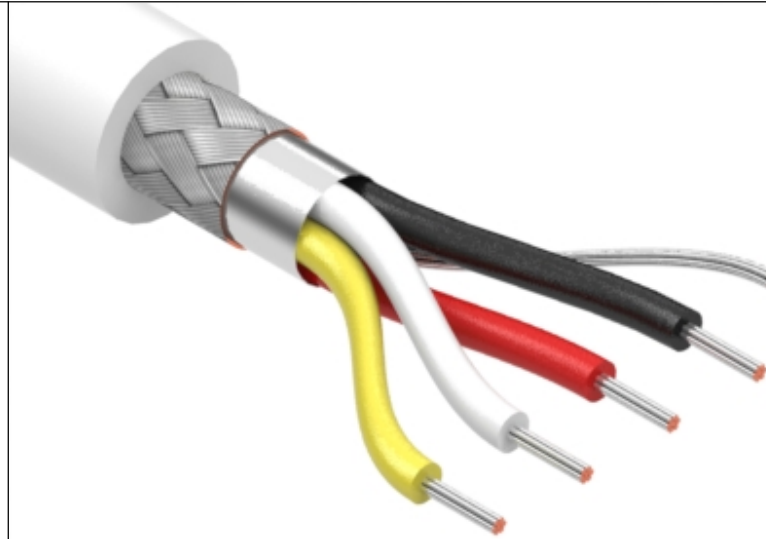

Revision:	Date:	Description:
A	04/09/2018	Initial release

Prepared: RS	<small>Digitally signed by RS Date: 2018.04.11 15:48:17 -07'00'</small>
Verified: AW	<small>Digitally signed by AW Date: 2018.04.17 11:34:46 -07'00'</small>
Dimensions are in millimeters.	
Tolerances:	
X: ± 0.5 mm	
X.X: ± 0.3 mm	
X.XX: ± 0.05 mm	

Notes:
RoHS and REACH compliant
Function test: no open, no short circuit, no intermittent
Description:
Wire, 4C TS, 26 AWG, UL2464, 300V, 80C, 5 mm, shielded, VW-1, PVC, white

TENSILITY	
<small>tel</small> 1.541.323.3228	<small>800</small> 877.670.7118
<small>fax</small> 1.541.323.4202	<small>web</small> tensility.com
Size: A	Part number: 30-01034
Scale: 10:1	
Sheet 1 of 1	

5

4

3

2

1