



Electrical Specifications

Center Frequency: 1422.5 MHz
-3dB Bandwidth: 55 MHz
Passband: 1395-1450 MHz
Insertion Loss: 3.0 dB Max
VSWR: 1.7:1 Max
Attenuation: >30 dB @ 1375 MHz
 >15 dB @ 1385 MHz
 >15 dB @ 1460 MHz
 >30 dB @ 1470 MHz
In/Out Impedance: 50Ω
Input Power: 1 W


Mechanical

Connector Type: SMA (F)
Dimensions: 45 x 42 x 13 mm

Environmental

Operating Temperature: -40 to +75° C
Storage Temperature: -50 to +85° C

Outline Drawing:

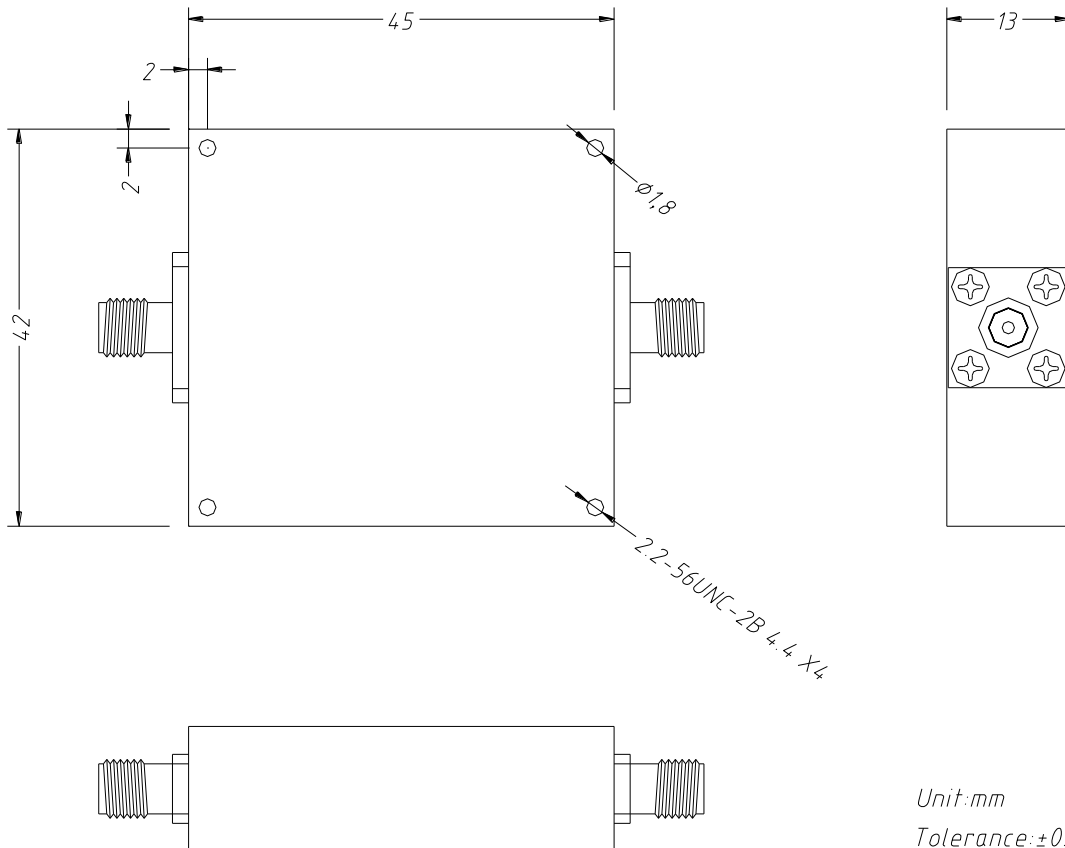

Unit:mm
Tolerance:±0.3