




TOP VIEW

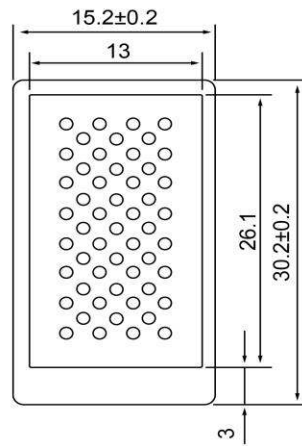


SIDE VIEW

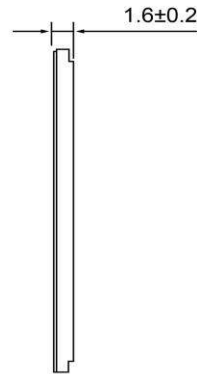

BOTTOM VIEW

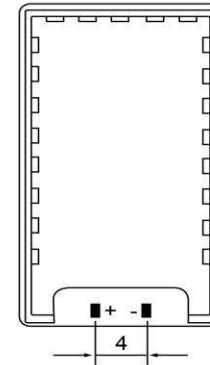

Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description		Date	Approved	
Shape	Rectangle		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS  <b>DB UNLIMITED</b>	1	Released from Engineering		3/24/2015	J.S.	
Resonant Frequency	800	(Hz)							
Frequency Range	800 ~ 20,000	(Hz)							
SPL @ 10cm	89	(dBA)							
Capacitance	750	(nF)							
Diaphragm Material	Piezo								
Rated Voltage	7	(Vrms)							
Max Input Voltage	9	(Vrms)							
Mount Type	Flush Mount								
Operating Temperature	-20 ~ +70	°C							
Storage Temperature	-30 ~ +85	°C							
Weight	2	(g)							
				<b>Drawn by</b> A.B. <b>Date</b> 3/14/2015 <b>Checked by</b> P.D. <b>Date</b> 3/23/2015 <b>Approved by</b> J.S. <b>Date</b> 3/24/2015					
				<b>Piezo Speaker</b>			<b>SZ300807-1</b>		

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).