
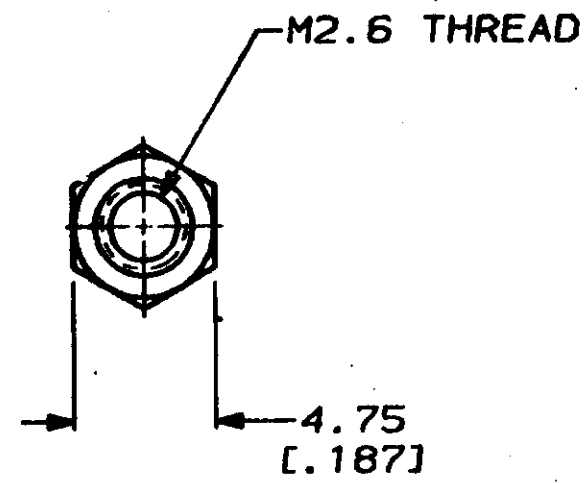


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

REV	LOC	QTY	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
2	BD	39				0	RLSE PER NPR 2454, WAS 89-5898-11	08/18/89	-
			✓	✓		A	OBSOLETE -2 PER ECN BD5374	08/12/91	NS

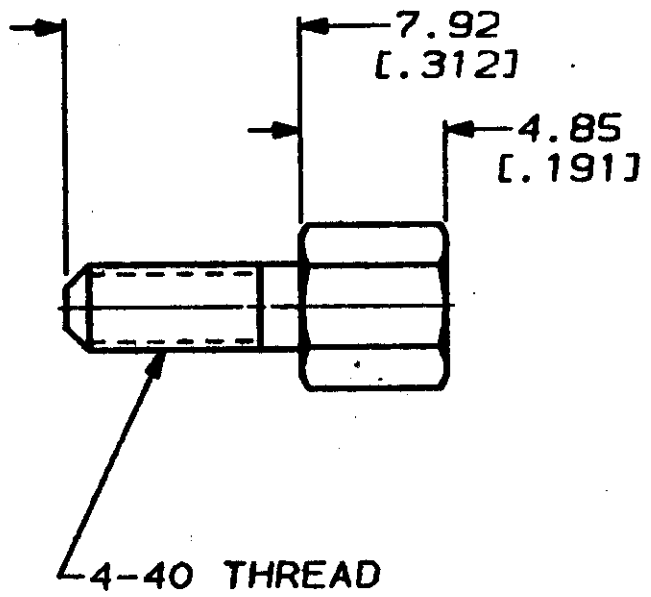

- ① 3.81µm [.000150] MIN ZINC PLATE PER ASTM B633, TYPE II, CLASS SC1, YELLOW CHROMATE.
- ② 3.81µm [.000150] MIN ZINC PLATE PER ASTM B633, TYPE III, CLASS SC1, CLEAR CHROMATE.

	②	749765-3
OBSOLETE	①	749765-2
	FINISH	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLC DEC ± 0.13 (.005) 3 PLC DEC ± - ANGLES ± 2°		DR 08/16/89 L. SIFE CHK 8-20-89 R. STONE APPD 8-20-89 J. MESTRAH APPD 8-20-89 J. SIMERS PRODUCT SPEC APPLICATION SPEC WEIGHT -		AMP INCORPORATED Harrisburg, Pa. 17105 NAME SCREWLOCK, M2.6 FEMALE, AMPLIMITE®	
MATERIAL CARBON STEEL PER ASTM A109		SIZE	CAGE CODE	DRAWING NO	
FINISH SEE TABLE		B	00779	749765	
		SCALE	4:1	SHEET 1 OF 1	

CUSTOMER DRAWING