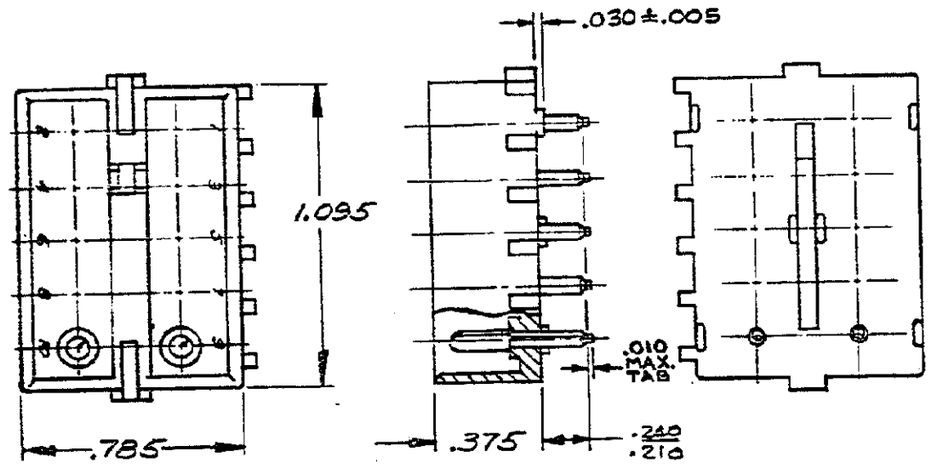

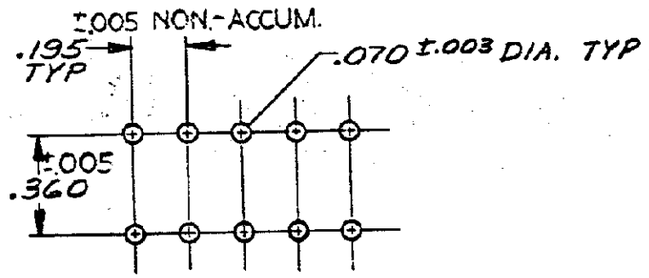

RECOMMENDED LAYOUT
FOR .125 THICK P.C. BOARD

1. MATES WITH HOUSING 480285.
2. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3

1 MATES WITH HOUSING 480285.
2 PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
3 DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

K	RESTORED	BKD	RS	3/28/85
K	REV. PER M-7375	SS	GM	3-27-85
J	2.50% ±.50% REF M-7285	DAS	DH	4/11/83
H	ADDED NOTE 3, M-6694	MF	DH	4-30-81
G	REV. TAIL LENGTH M-5334	MF	DH	3-24-81
F	REVISED M-4161	MF	DH	3-7-77
E	ECN M-3871	REN	DH	3-10-76
D	ECN M-3452	GV	REF	7/18/74
C	ECN M-3156	BC	MW	6/27/73
B	SUPERSEDED BY 350219 ADDED COLOR			6/13/73
LTR	REVISION RECORD	DR	CHK	DATE

M1	REVISED PER ECR-21-117185	PJ / RS	VS	20OCT2021
M	OBSOLETE -2 PER ECN CM-2709	RS		6-26-82
L	OBSOLETE 1-1, 1-2, 2-1, 2-2, 3-1, 3-2, 4-1, 4-2, 5-1, 5-2, 6-1, 6-2, 7-1, 7-2, 8-1, 8-2, 9-1, 9-2 CM-4173	KW / RS		4-19-86

REQUIRED PER ASSEMBLY

DESCRIPTION

350219-1	NYLON-NATURAL	copper alloy · PRE-TIN
ASSEMBLY NO.	HSG. MATL & COLOR	PIN MATL & FINISH

Unpublished copy not to be reproduced nor published without written permission of AMP Incorporated

©1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY

DR 9. Edmonson 6-13-73
CHK D. Graves 6-14-73
DE
APP Emil P. Kowalczyk 6/14/73

MATERIAL AND FINISH: SEE TABLE
WIRE — RANGE — INSULATION: — — —
TOLERANCE EXCEPT AS NOTED ±.015 ±1°0'
SCALE —

TE Connectivity
CLASS H
TYPE H
LOC CM B NO 350219 REV M1

NAME 10 CIRCUIT MATE-N-LOK P.C. BOARD HEADER

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

PRINT 53

AMP 1253 REV 11/65

S

D C B A

7 6 5 4