



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
CM	00	L		REVISED PER ECR-15-001261	02MAR15	SC	KD

- 1. 150°C TEMPERATURE RATING FOR THIS HOUSING IS FOR SHORT TERM DURATION ONLY. MAXIMUM OPERATING TEMPERATURE REMAINS 105°C.
- 2. INDIVIDUAL CORING FEATURES AROUND BASES OF SILOS MAY NOT BE PRESENT IN ALL LOCATIONS SHOWN.

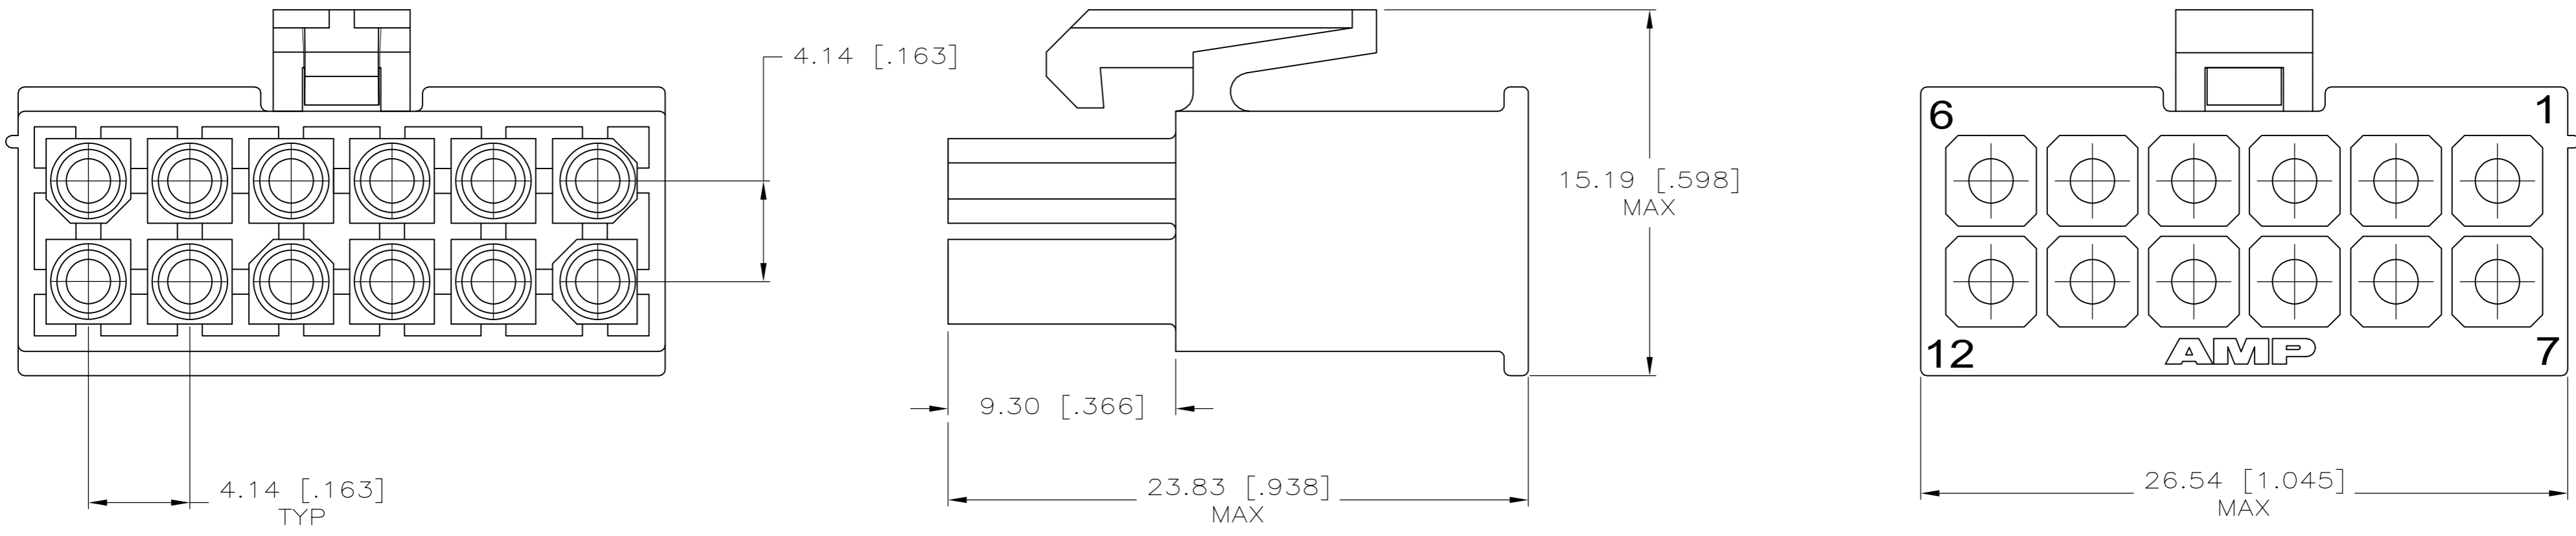

1	HIGH TEMP NYLON, UL94V-2, BLACK	1-770581-0
	NYLON, UL94V-0, WHITE	770581-1
	MATERIAL	PART NO

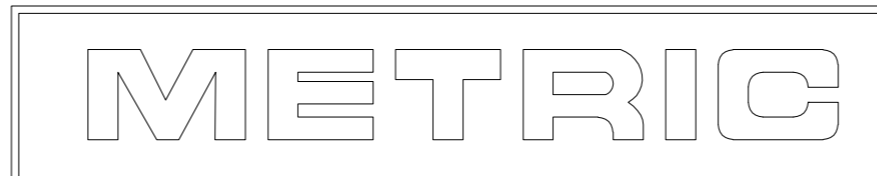

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S. HOOVER	12-MAY-2004	
DIMENSIONS: mm [INCHES]		CHK	C. JONES	12-MAY-2004	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	C. JONES	12-MAY-2004	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 0.13 [.005] 4 PLC ± ANGLES ±		PRODUCT SPEC	NAME		
MATERIAL	FINISH	APPLICATION SPEC	PLUG, 12 CIRCUIT, MINI UNIVERSAL MATE-N-LOK™		RESTRICTED TO
CUSTOMER DRAWING		WEIGHT	A2	00779	C=770581
SCALE 5:1		SHEET 1 OF 1	REV L		

770581