SPECIFICATIONS


"Preliminary data"

Model Number: CR0824UB-Y51(NCU)





Mechanical Drawing:

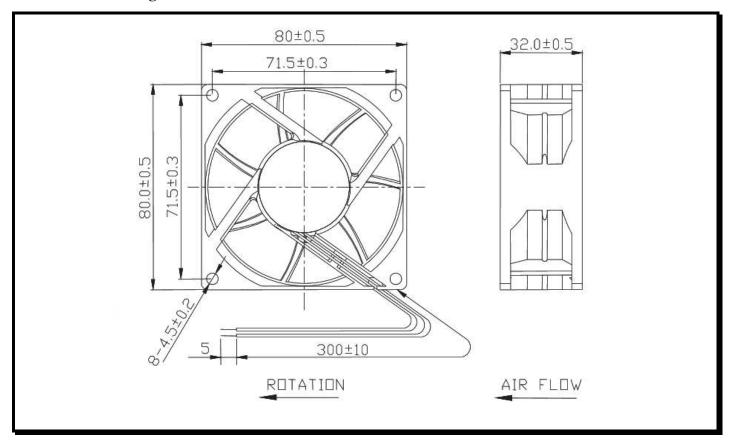

Motor:

Nominal Voltage = 24 VDC
Nominal Running Current = 0.15 Amps
Power Input = 3.60 Watts
Speed = 4200 RPM
Bearings = Ball

Air Flow = 52.39 CFM Static Pressure: = 0.32 Inch of H2O Acoustic = 44.0 dB(A)

Acoustic = 44.0 dB(A Weight) = 108.0 g

Construction:

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

Life Expectancy:

This fan is designed for continuous duty life of 70,000 hours at 40° C.

Additional Features:

Brushless DC Motor Locked Rotor Protection Polarity Protected

Automatic Restart Capability

Version:

Operating Temperature: -10° C to 70° C Storage Temperature: -40° C to 70° C

Termination:

 300 ± 10 mm Lead wires, AWG 24, UL 1007

Agency Approvals:

UL, CUL, TUV, CE