
		C	





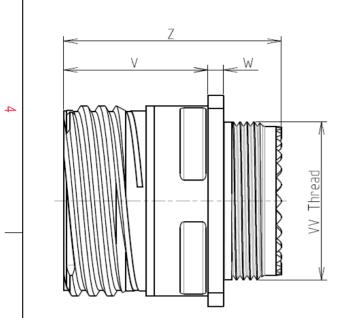

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 29.53 g ± 10%

8D 0

G

11

Κ

01

А

F


Е

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

CONTACT TYPE : PIN(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

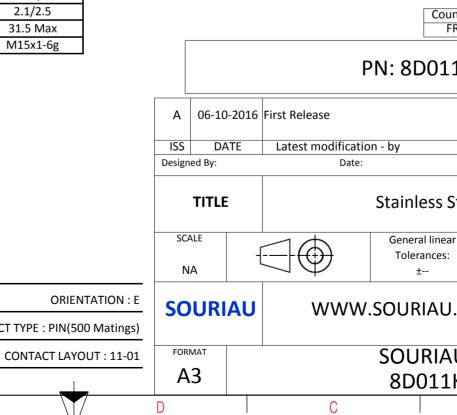

	Φ		A		_
					4
AS EXA	AMPLE				3
s whic er of t ndatio untry FR	non-conformit th does not co he Parties or b on, technical no Jurisd	mply with by a third par			2
				MOD N°	
Stee	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT 859				
			cument is the prop	perty of	1
	OM SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
.KU	1AE-C	1		1/2	J
	В		А		

		G	г П	m		0
		Contact Layout				Panel Cutout
4		01			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		¥ 75	
ω	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
2						Country FR PN: 8D011K
					A 06-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	Stainless Ster General linear Tolerances: ±
						SOURIAU
l	Н	G	F	E	D A3	8D011K0

