




DESIGNER'S KIT K5-GALI+

Wideband Amplifiers

50Ω DC to 4 GHz

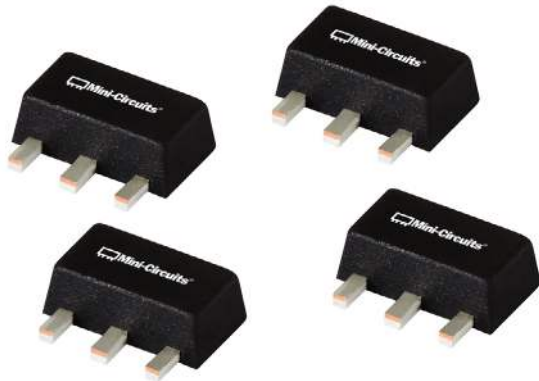

FEATURES

- Wideband, 50 Ω
- InGaP HBT microwave
- Up to 15.9 dBm output power
- Usable to 6 GHz
- Transient and ESD protected
- Miniature SOT-89 package
- Exposed metal bottom
- Excellent heat dissipation
- Low thermal resistance

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION



Evaluation boards available.
See individual model data sheets.



K5-GALI+ ELECTRICAL SPECIFICATIONS

(kit includes 5 models, 10 of each, 50 total)

Model	Freq. ¹ (GHz) f _L -f _U	Gain (dB) Typical Over frequency, GHz							Maximum Power ² (dBm) @ 1 GHz Output Input ³ (1dB Compr.)			Dynamic Range @ 1 GHz		VSWR (:1) Typ.				Max. Rating ³		DC ⁴ Operating Power @ pin 3			Therm. Resist. θ _{jc} Typ. °C/W	Evaluation Board	
		0.1	1	2	3	4	6	Min @ 2 GHz	Typ.	Min	NF (dB) Typ.	IP3 (dBm) Typ.	In DC-3 GHz	In 3-f _U GHz	Out DC-3 GHz	Out 3-f _U GHz	I (mA)	P (mW)	Current (mA)	Device Volt.					
																					Typ.	Min.			Max
GALI-6F+	DC-4	12.1	12.0	11.6	11.4	10.9	12.3	10	15.8	14.3	20	4.5	35.5	1.5	1.5	1.9	2.2	65	350	50	4.8	4.2	5.4	93	TB-409-6F+
GALI-4F+	DC-4	14.3	14.0	13.4	13.0	12.3	13.2	11	15.3	13.8	20	4.0	32	1.2	1.2	1.5	1.8	65	325	50	4.4	4.0	5.0	93	TB-409-4F+
GALI-51F+	DC-4	18.0	17.3	15.9	14.8	13.4	13.3	14	15.9	14.4	13	3.5	32	1.2	1.3	1.5	1.7	65	325	50	4.4	4.0	5.0	78	TB-409-51F+
GALI-5F+	DC-4	20.4	19.3	17.4	16.0	14.8	15.1	15.5	15.7	14.2	13	3.5	31.5	1.2	1.2	1.4	1.4	65	325	50	4.3	3.9	4.9	103	TB-409-5F+
GALI-55+	DC-4	21.9	20.6	18.5	17.0	15.5	15.7	17	15.0	13.5	13	3.3	28.5	1.25	1.35	1.3	1.5	65	350	50	4.3	3.8	4.8	100	TB-409-55+

Protected under U.S. Patent 6,943,629

1. Low frequency cutoff determined by external coupling capacitors. f_U is the upper frequency limit for each model.

2. Models tested at 1 GHz except Gali-55+ at 2 GHz.

3. Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.

4. Supply voltage must be connected to pin 3 through a bias resistor in order to prevent damage. Reliability predictions are applicable at specified current and normal operating conditions.



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
ECO-009046
K5-GALI+
MCL NY
080221