




REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NEW DWG FORMAT	18APR19	BROOK	TOMMY
A2	-	REVISED NOTE #5	28JUN22	JHEAD	DH




WIRING DIAGRAM

120 OHMS
1/4 WATT
5%




FACE VIEW

CONTACT
AT60-202-2031
2X




LOCKING WEDGE
AWM-2PB

SOLID REAR SEAL

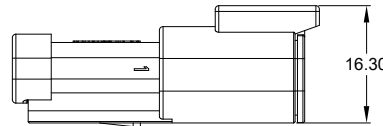

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
HOUSING: THERMOPLASTIC; BLACK
SEAL: SILICONE RUBBER
BLACK END CAP AND CONNECTOR BODY
- MODIFICATIONS: RESISTOR
- CONNECTOR SPECIFICATIONS:
3.1 CURRENT RATING: 7.5 AMPS
3.2 OPERATING TEMPERATURE: -55°C TO +125°C
3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
3.6 MATING CYCLE DURABILITY: 100 CYCLES
3.7 RoHS COMPLIANT
- RESISTOR SPECIFICATIONS:120 OHMS.
- MATING PART: ATM06-2S* PLUG WITH AWM-2SB WEDGE INSTALLED.
(* = MODIFICATIONS AND COLORS)
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

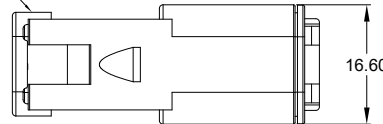

ATM04-2P-RB120BK		REF: DM042PFP0	
PART NUMBER		DESCRIPTION	
QUANTITY	MATERIALS LIST		
UNLESS OTHERWISE SPECIFIED: 1) All dimensions are in metric (mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Fractions ±1/64 Angles ±1° 3) Note reference =		SIGNATURES	DATE
MATERIAL SPECIFICATIONS:		DRAWN: BROOK DNG	18APR19
PROCESS SPECIFICATIONS:		CHECKED: ORION LI	18APR19
NEXT ASSY:		ENGINEER:	
		APPROVAL: TOMMY	18APR19
		CUSTOMER:	
		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
SIZE	TYPE	DWG NO.	REVISION
B	C-	ATM04-2P-RB120BK	A2
SCALE: NONE			SHEET 1 OF 1

TITLE: RECEPTACLE,B KEY,2 CONTACTS,RESISTOR,ATM BLK
DWG NO: ATM04-2P-RB120BK
REV: A2
SH: 1
OF: 1