


Dimension




Pole	DIM A	DIM B
2	30.00±0.30	15.00±0.20
3	45.00±0.30	30.00±0.30
4	60.00±0.50	45.00±0.30
5	75.00±0.50	60.00±0.50
6	90.00±0.80	75.00±0.50
7	105.00±0.80	90.00±0.80
8	120.00±0.80	105.00±0.80
9	135.00±0.80	120.00±0.80
10	150.00±0.80	135.00±0.80

Material

- 1.Terminal (metal housing): Steel Stamping
- 2.Insulator(housing): Thermoplastic(UL94V-0), Green
- 3.Terminal Screw: Cr3+Zn plating""slot type
- 4.Contact: Brass
- 5.Surface of solder tail: Tin plated

Electrical

- 1.Voltage rating: 600V
- 2.Current rating: 125A
- 3.Wire range:
- 4.Solid wire(AWG):2-20
- 5.Stranded wire(AWG):2-20
- 6.Torque:36.5Lb-In
- 7.Screw:M5
- 8.Wire strip length:12-15mm
- 9. Withstanding Voltage: 2.2KV
- 10.Operating temperature: -30°C to +105°C
- 11.Soldering temperature:250°C±10°C/5Sec
- 12.Safety Approval: 

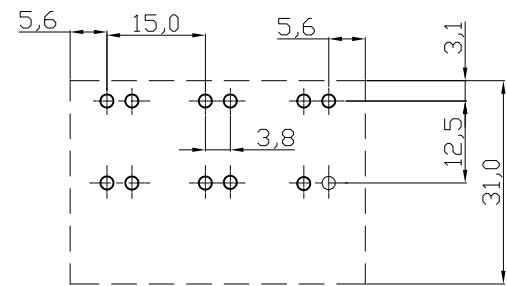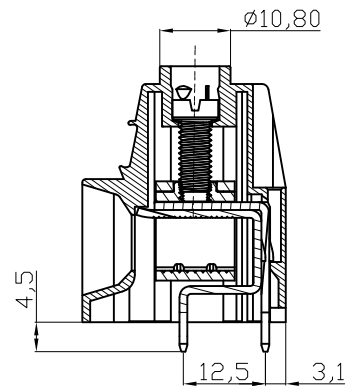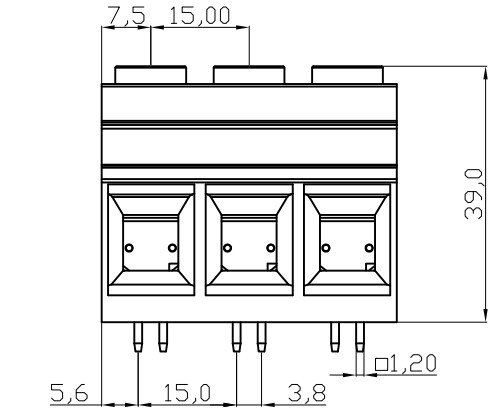

SECTION A-A

PCB LAYOUT

RoHS compliant

Scale	1:1
TOLERANCE	
X.	±0.50
X.X	±0.30
X.XX	±0.10
DIM	TOL
X.°	±1°
Angle	TOL

①	Drawn	10.12.2009	Dean
	Modification	Date	Name

Date	Name	Customer-No.
10.12.2009	Dean	
Approved	10.12.2009	Hellwig
ASSMANN WSW-No. <b>A-TB150-EIxx</b>		
Drawing-No.		rev01
<b>ASSMANN</b> WSW components		ASS 3808 CO
Replace	Sheet	

RoHS compliant

1

2

3

4

5

6

7