



Electrically held lighting contactor, Contactor amp rating 30A, 0 N.C. / 4 N.O. Poles, 600VAC 60HZ coil, Non-combination type, (no disconnect device), Encl NEMA type 4X 304 S-Steel, Water/dust tight noncorrosive

|   |   |
|---|---|
| product brand name  | Class LE                                      |
| design of the product   | Electrically held lighting contactor          |
| special product feature   | Compact design; Finger safe control terminals |
| <b>General technical data</b>   |   |
| weight [lb]   | 19 lb   |
| Height x Width x Depth [in]   | 16 × 13 × 6 in                                |
| touch protection against electrical shock                               | NA for enclosed products                      |
| installation altitude [ft] at height above sea level maximum            | 6560 ft                                       |
| ambient temperature [°F]  |   |
| • during storage  | -67 ... +176 °F                               |
| • during operation  | 32 ... 104 °F                                 |
| ambient temperature   |   |
| • during storage  | -55 ... +80 °C                                |
| • during operation  | 0 ... 40 °C                                   |
| country of origin   | USA   |
| <b>Contactors</b>   |   |
| size of contactor   | 30 Amp  |
| number of NO contacts for main contacts                                 | 4   |
| number of NC contacts for main contacts                                 | 0   |
| operating voltage for main current circuit at AC at 60 Hz maximum       | 600 V   |
| mechanical service life (operating cycles) of the main contacts typical | 10000000                                      |
| contact rating of the main contacts of lighting contactor               |   |
| • with electronic ballast [LED driver] (1 pole per 1 phase) rated value | 16A @120V / 8A @277V 1p 1ph                   |
| • at tungsten (1 pole per 1 phase) rated value                          | 30A @277V 1p 1ph                              |
| • at tungsten (2 poles per 1 phase) rated value                         | 30A @480V 2p 1ph                              |
| • at tungsten (3 poles per 3 phases) rated value                        | 30A @480V 3p 3ph                              |
| • at ballast (1 pole per 1 phase) rated value                           | 30A @347V 1p 1ph                              |
| • at ballast (2 poles per 1 phase) rated value                          | 30A @600V 2p 1ph                              |
| • at ballast (3 poles per 3 phases) rated value                         | 30A @600V 3p 3ph                              |
| • at resistive load (1 pole per 1 phase) rated value                    | 30A @600V 1p 1ph                              |
| • at resistive load (2 poles per 1 phase) rated value                   | 30A @600V 2p 1ph                              |
| • at resistive load (3 poles per 3 phases) rated value                  | 30A @600V 3p 3ph                              |
| <b>Auxiliary contact</b>  |   |
| number of NC contacts at contactor for auxiliary contacts               | 1   |
| number of NO contacts at contactor for auxiliary contacts               | 1   |
| number of total auxiliary contacts maximum                              | 4   |
| contact rating of auxiliary contacts of contactor according to UL       | A600 / Q600                                   |
| <b>Coil</b>   |   |



|  |              |
|--|--------------|
| type of voltage of the control supply voltage                            | AC           |
| control supply voltage   |              |
| • at AC at 60 Hz rated value   | 600 V        |
| apparent pick-up power of magnet coil at AC                              | 87 VA        |
| apparent holding power of magnet coil at AC                              | 9.4 VA       |
| operating range factor control supply voltage rated value of magnet coil | 0.85 ... 1.1 |

|   |  |
|---|--|
| <b>Enclosure</b>                                  |  |
| degree of protection NEMA rating of the enclosure | NEMA 4x 304 stainless steel enclosure          |
| design of the housing                             | dustproof, waterproof & resistant to corrosion |

|  |  |
|--|--|
| <b>Mounting/wiring</b>   |  |
| mounting position  | Vertical                               |
| fastening method   | Surface mounting and installation      |
| type of electrical connection for supply voltage line-side   | Screw-type terminals                   |
| tightening torque [lbf-in] for supply  | 18 ... 22 lbf-in                       |
| type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded                        | 2x (16 ... 12 AWG), 2x (14 ... 8 AWG)  |
| temperature of the conductor for supply maximum permissible  | 75 °C                                  |
| material of the conductor for supply   | CU                                     |
| type of electrical connection for load-side outgoing feeder  | Screw-type terminals                   |
| tightening torque [lbf-in] for load-side outgoing feeder   | 18 ... 22 lbf-in                       |
| type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded       | 2x (16 ... 12 AWG), 2x (14 ... 8 AWG)  |
| temperature of the conductor for load-side outgoing feeder maximum permissible   | 75 °C                                  |
| material of the conductor for load-side outgoing feeder  | CU                                     |
| type of electrical connection of magnet coil   | Screw-type terminals                   |
| tightening torque [lbf-in] at magnet coil  | 7 ... 10 lbf-in                        |
| type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded                      | 2x (20 ... 16 AWG), 2x (18 ... 14 AWG) |
| temperature of the conductor at magnet coil maximum permissible  | 75 °C                                  |
| material of the conductor at magnet coil   | CU                                     |
| type of electrical connection at contactor for auxiliary contacts  | Screw-type terminals                   |
| tightening torque [lbf-in] at contactor for auxiliary contacts   | 7 ... 12 lbf-in                        |
| type of connectable conductor cross-sections at contactor for AWG cables for auxiliary contacts single or multi-stranded | 2x (20 ... 16 AWG), 2x (18 ... 14 AWG) |
| temperature of the conductor at contactor for auxiliary contacts maximum permissible                                     | 75 °C                                  |
| material of the conductor at contactor for auxiliary contacts  | CU                                     |

|   |                                  |
|---|----------------------------------|
| <b>Short-circuit current rating</b>   |                                  |
| design of the fuse link for short-circuit protection of the main circuit required | 100kA@600V (Class J 40A max)     |
| design of the short-circuit trip  | Thermal magnetic circuit breaker |
| maximum short-circuit current breaking capacity (Icu)                             |                                  |
| • at 240 V  | 24 kA                            |
| • at 480 V  | 65 kA                            |
| • at 600 V  | 14 kA                            |
| certificate of suitability  | NEMA ICS 2; UL 508               |

|   |  |
|---|--|
| <b>Further information</b>  |  |
| <b>Industrial Controls - Product Overview (Catalogs, Brochures,...)</b>   |  |
| <a href="http://www.usa.siemens.com/iccatalog">www.usa.siemens.com/iccatalog</a>  |  |
| <b>Industry Mall (Online ordering system)</b>   |  |
| <a href="https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LEN04C004600B">https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LEN04C004600B</a>         |  |
| <b>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)</b>   |  |
| <a href="https://support.industry.siemens.com/cs/US/en/ps/US2:LEN04C004600B">https://support.industry.siemens.com/cs/US/en/ps/US2:LEN04C004600B</a>   |  |
| <b>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)</b>  |  |
| <a href="http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LEN04C004600B&amp;lang=en">http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LEN04C004600B&amp;lang=en</a> |  |
| <b>Certificates/approvals</b>   |  |
| <a href="https://support.industry.siemens.com/cs/US/en/ps/US2:LEN04C004600B/certificate">https://support.industry.siemens.com/cs/US/en/ps/US2:LEN04C004600B/certificate</a>                   |  |

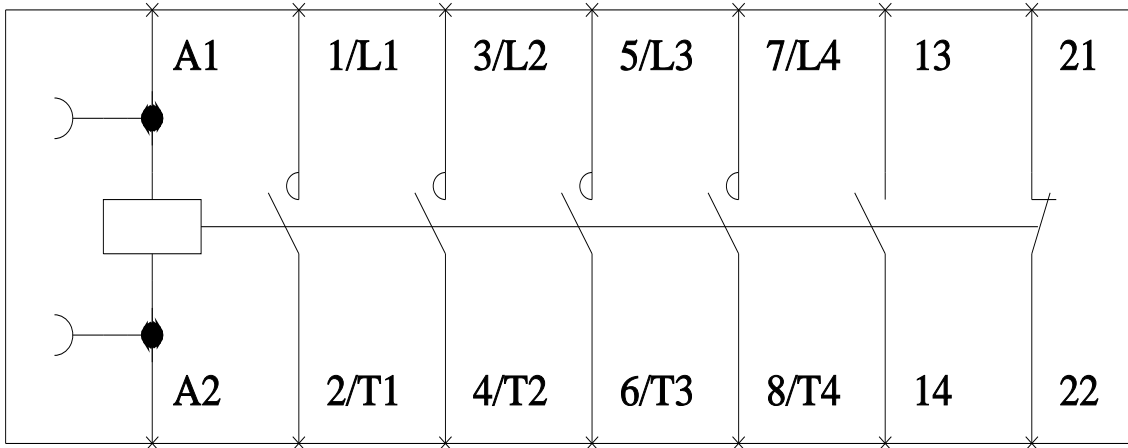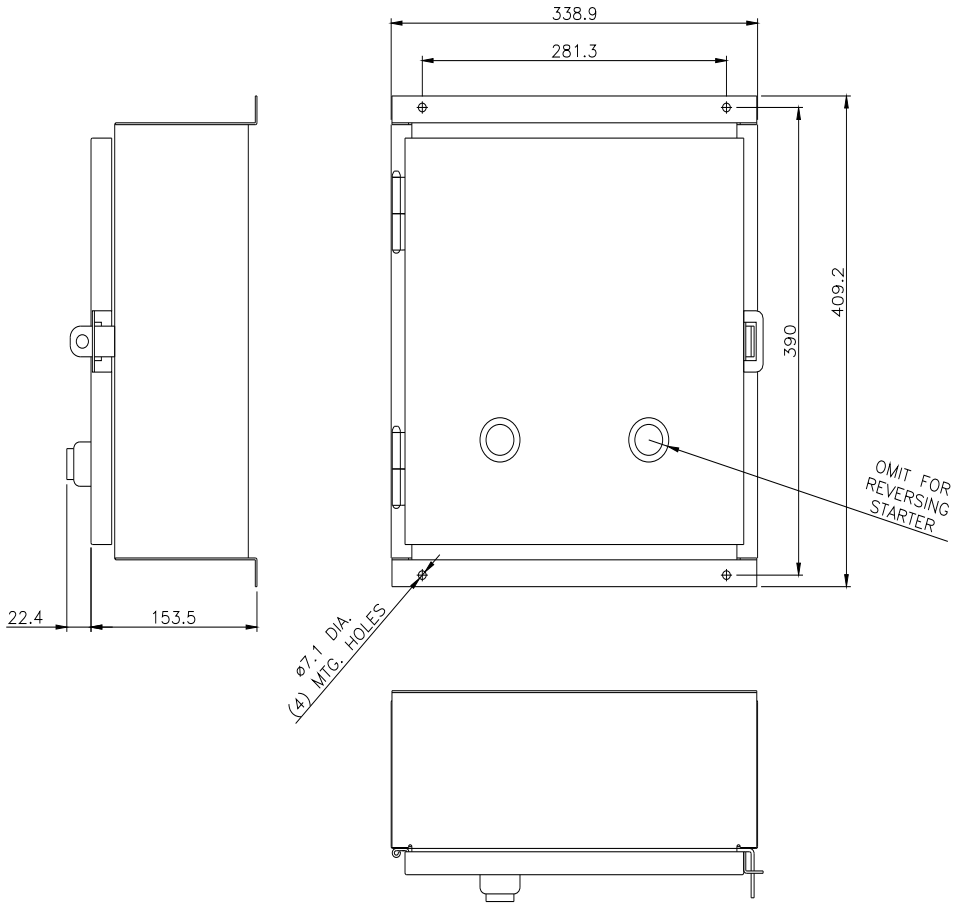

**LEN00C004 Wiring Diagram**

D38309004

