



OC69271

LTE Direct Mount Omnidirectional Antenna 698-960 MHz/1710-2700 MHz

The OC69271 antenna is a wide band omnidirectional antenna covering the domestic LTE700/Cellular/ PCS/AWS/ MDS, WiMAX 2300/2500, and global GSM900/GSM1800/ UMTS/LTE2600 bands. It can be used in both indoor and outdoor applications. It comes complete with mast mounting hardware and includes a UV stable radome enclosure that provides years of use without degradation to either mechanical properties or aesthetics.

FEATURES AND BENEFITS

- Applicable for both 3G and 4G solutions
- Domestic LTE 700 band and Global LTE 2600 band
- Domestic Cellular and Global GSM
- WiMAX 2300/2500/2600
- Weatherproof UV stable radome
- Mast mounting hardware included

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	698-960	1710-1990	1920-2170	2100-2500	2500-2690
VSWR	<2.5:1	<2.0:1			
Gain (dBi)	1.5 dBi	3.5			
Efficiency (%)	76	87			
Nominal Impedance (Ohms)	50				
Max Power - Ambient 25°C (W)	20				
Polarization	Linear, Vertical				
Vertical Plane 3 dB Beamwidth	81°	75° (1700-2200)		100°	
Horizontal Plane 3 dB Beamwidth	360°, Omnidirectional				

MECHANICAL SPECIFICATIONS

Dimensions - diameter x height - mm (inches)	24.5 x 248 (1 x 9.8)
Weight - kg (lbs.)	.156 (.343)
Mount Style	Mast/pole mount
Radome Material	Polycarbonate, UV, White

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature - °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Material Substance Compliance	RoHS
Relative Humidity - %	10-95




CONFIGURATION

MODEL NUMBER	CONNECTOR
OC69271-FNM	Type N male
OC69271-FNF	Type N female




PACKAGED DIMENSIONS	MASTER CARTON	AIR PALLET	OCEAN PALLET
Number of Antennas	20	480	600
Height - cm (in.)	30.0 (11.8)	135 (53.2)	165 (65.0)
Length - cm (in.)	52.5 (20.7)	105 (41.3)	105 (41.3)
Width - cm (in.)	26.5 (10.4)	79.5 (31.3)	79.5 (31.3)
Shipping Weight - kg (lbs.)	7.36 (16.2)	190 (419)	230 (507)

RADIATION PATTERNS




698 MHZ

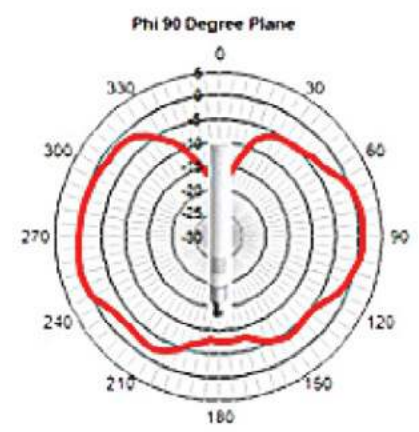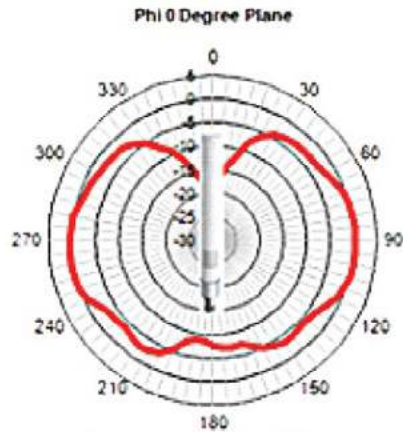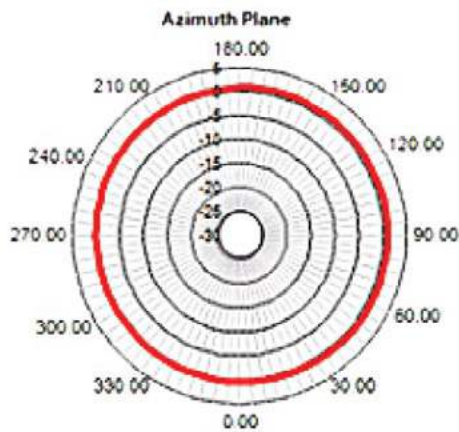




824 MHZ

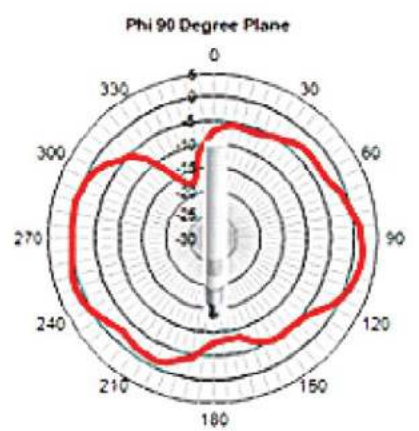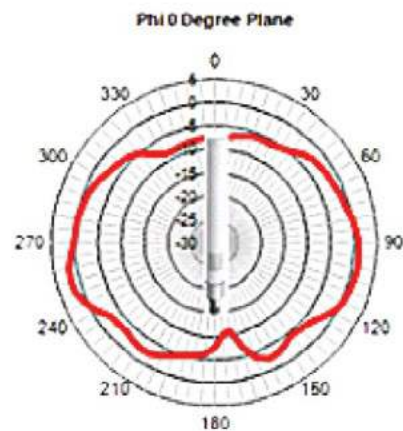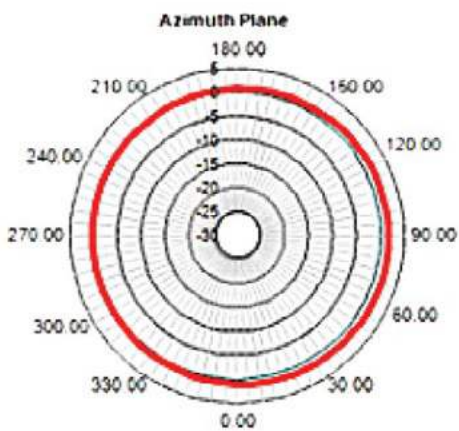




960 MHZ

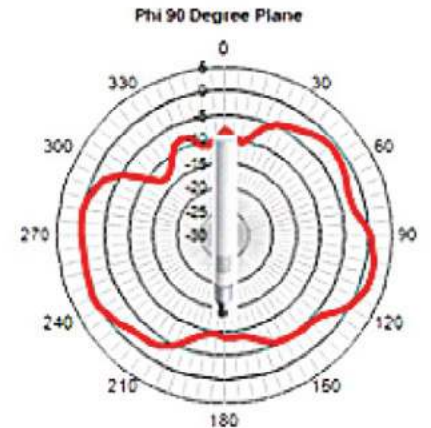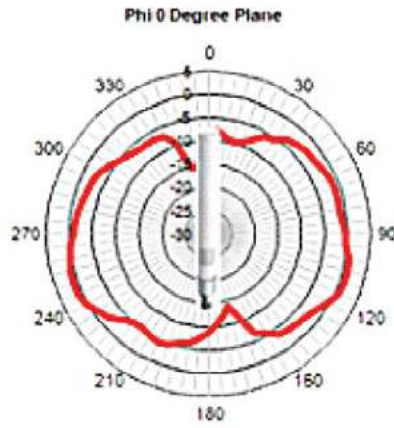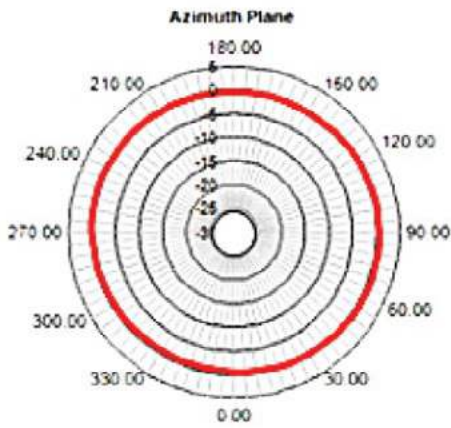

1710 MHZ

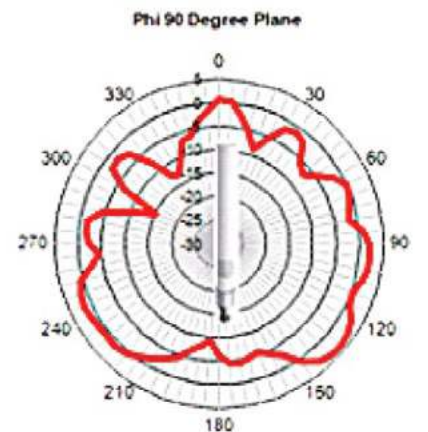
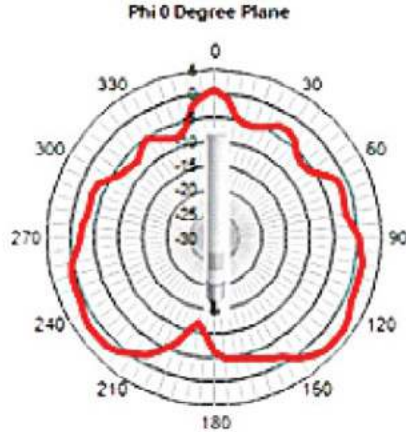
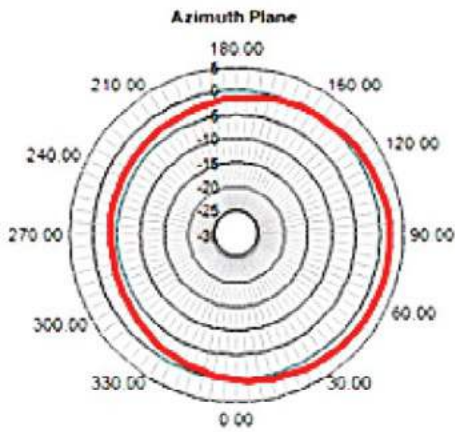


2170 MHZ

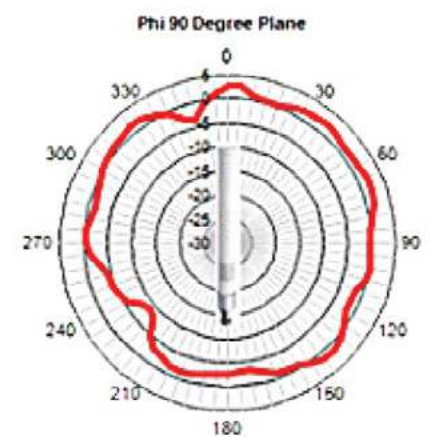
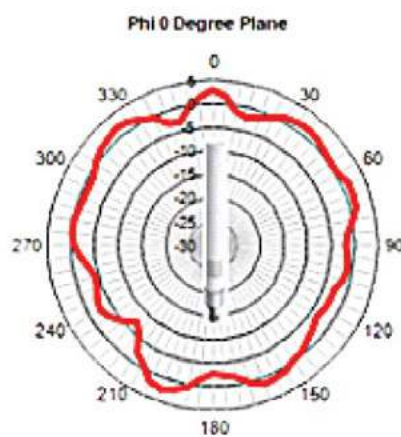
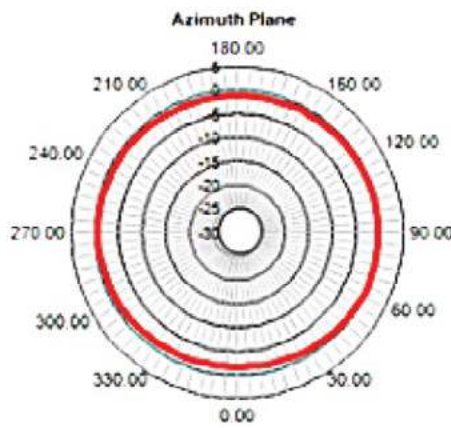


RADIATION PATTERNS

2170 MHZ

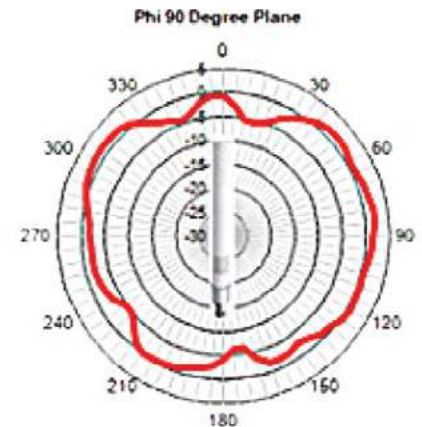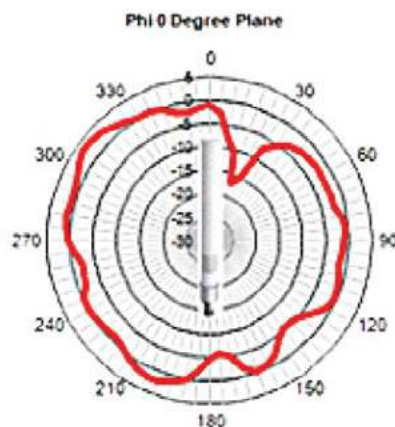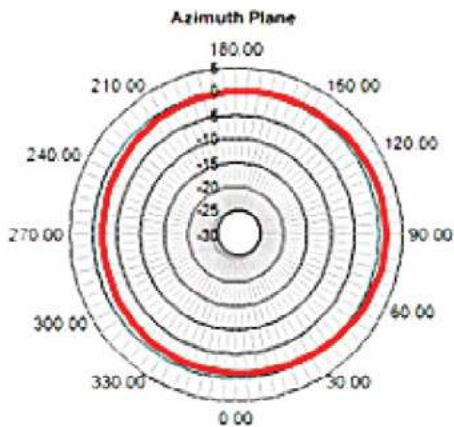

2700 MHZ

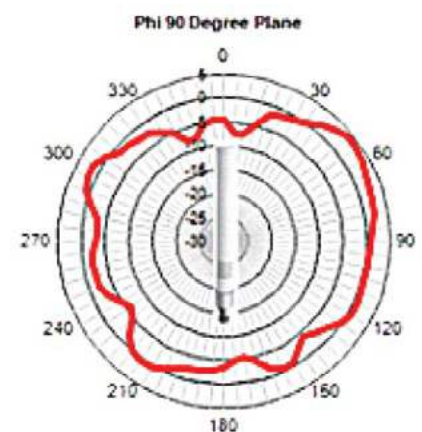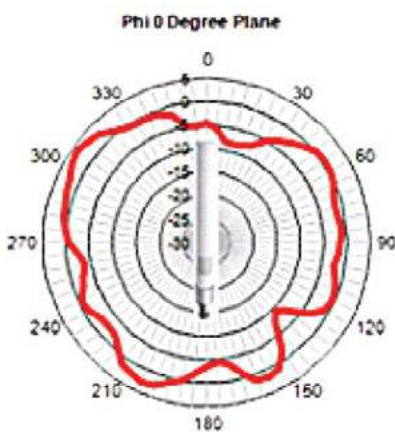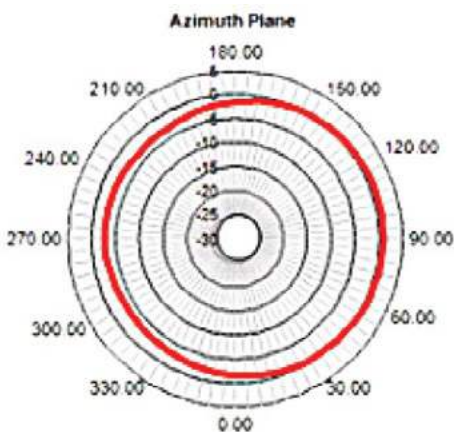

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original