

STAMPED SECONDARY CONNECTOR, COPPER, TINNED

CATALOG NUMBER

LPC508L



CERTIFICATIONS




FEATURES

Use to bond sheet metal bodies such as gutters or fixed ladders to the lightning protection system

PRODUCT ATTRIBUTES

Conductor Size, UL: Secondary; Class 1
Material: Copper
Finish: Tinned
Depth: 1 1/2"
Height: 1 1/4"
Width: 1 1/2"
Unit Weight: 0.1 lb

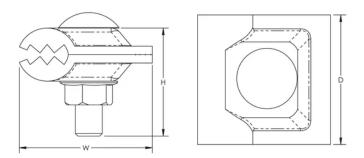

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221 Option 1 – Customer Care Option 2 – Technical Support Europe

nVent.com TRACER

Netherlands: +31 800-0200135 France: +33 800 901 793

Europe

Germany: 800 1890272 Other Countries: +31 13 5835404

HOFFMAN

APAC

RAYCHEM

Shanghai: + 86 21 2412 1618/19 Sydney: +61 2 9751 8500

SCHROFF



© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

CADDY ERICO

nVent reserves the right to change specifications without notice.