


LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
NUMMER 829 033		E		Contact pin base material change from CuSn (Phosphor bronze) to CuZn (Brass). Plating change from MIN. 0.8µm gold plating to min. 0.7µm Pd Ni + 0.1µm gold flash at contact area (Area F).	18JUL2014	TJ	JK
VERWENDET FÜR							
WAR NR. E-87-9102							

POLZ PRO REIHE	L±0.5	BESTELL-NR.
—	—	—
2	5.08	-2
3	7.62	-3
4	10.16	-4
5	12.70	-5
6	15.24	-6
7	17.78	829 033 -7
8	20.32	-8
9	22.86	-9
10	25.40	-0
11	27.94	1-
12	30.48	1-
13	33.02	1-
14	35.56	1-
15	38.10	1-
16	40.64	1-
17	43.18	1-
18	45.72	1-
19	48.26	1-
20	50.80	2-
21	53.34	2-
22	55.88	2-
23	58.42	2-
24	60.96	2-
25	63.50	2-
26	66.04	2-
27	68.58	2-
28	71.12	2-
29	73.66	2-
30	76.20	3-
31	78.74	3-
32	81.28	3-
33	83.82	3-
34	86.36	3-
35	88.90	3-
36	91.44	3-
37	93.98	3-
38	96.52	3-
39	99.06	3-
40	101.60	4-
41	104.14	4-
42	106.68	4-
43	109.22	4-
44	111.76	4-
45	114.30	4-
46	116.84	4-
47	119.38	4-
48	121.92	4-
49	124.46	4-
50	127.00	5- 829 033 -0

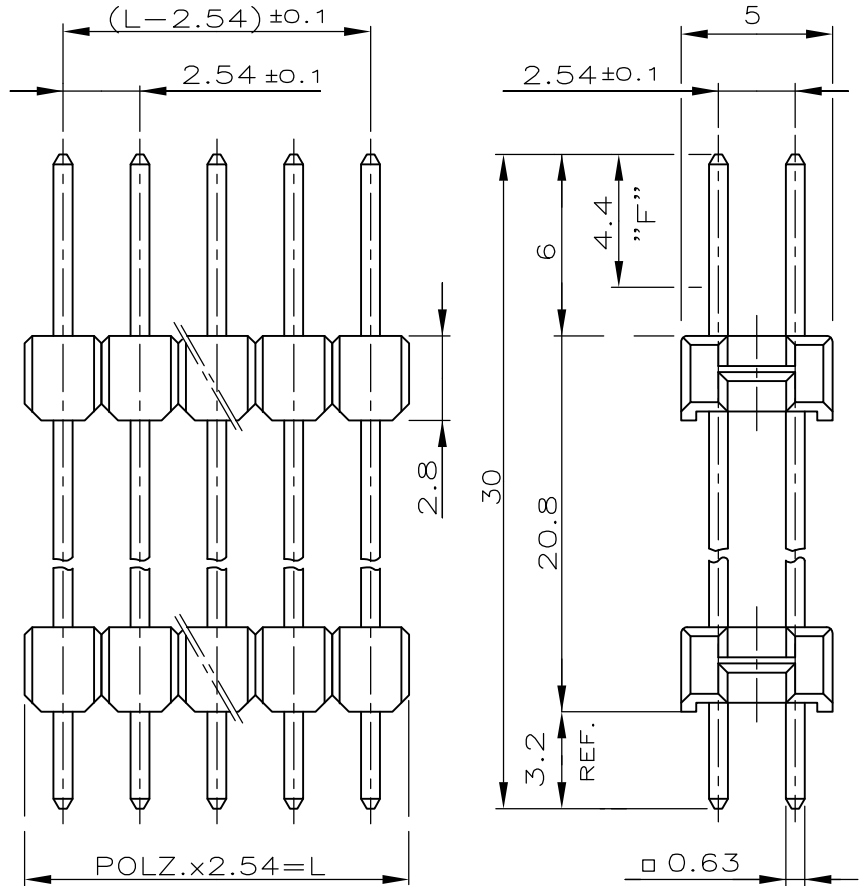

- 1 STECKSEITE: IM BEREICH "F" 0.7µm PdNi + 0.1µm GOLD FLASH ÜBER 1.27 µm Ni
- 1 LÖTSEITE: MIN. 2.5 µm ZINN ÜBER 1.27 µm Ni
- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

CAD-ORIGINAL
ZEICHNUNG NICHT ÄNDERN

KONTAKTSTIFT	CuZn	1
STIFTGEHÄUSE	PBTP-GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB 26/90...

DIMENSIONS: mm	DWN	12.03.87	MATERIAL	SEE TABLE	FINISH	SEE TABLE
	CHK	19.03.87	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	—				
±0.2 mm	PRODUCT SPEC	108-18012	NAME			
0 PLC ± -	APPLICATION SPEC	—	SPEZ. AMPMODU II STIFTELEISTE ZWEIREIHIG			
1 PLC ± -	WEIGHT	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -	CUSTOMER DRAWING	A4 00779	C-829033	SCALE	4:1	SHEET 1 OF 1
3 PLC ± -						
4 PLC ± -						
ANGLES ± -						