

Specification Status: Released

Maximum Electrical Rating
Operating Voltage: 16Vdc
Interrupt Current: 100A

Chip Size: 5 X 12mm

Leads: Nickel 1/4H
0.125mm nominal thickness

Solder: Lead-free

Tape: Polyester (White)
13 mm nominal width

Marking: (Color: Green)
— Manufacturer's Mark

✕ V21 — Part Identification

□□□□ — Lot Identification

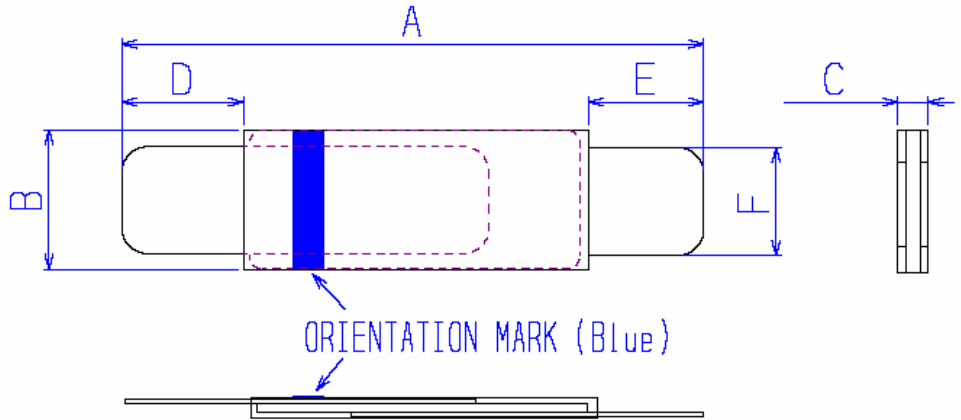


TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	20.9	23.1	4.9	5.3	0.6	0.8	4.1	5.8	4.1	5.8	3.9	4.1
in*:	(0.82)	(0.90)	(0.19)	(0.20)	(0.02)	(0.03)	(0.16)	(0.22)	(0.16)	(0.22)	(0.15)	(0.16)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Muller Kelvin Clips model BU-75K.

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP		REFERENCE RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE		TRIPPED-STATE POWER DISSIPATION	
	AMPS 25°C HOLD		AMPS AT 0°C HOLD TRIP		AMPS AT 25°C HOLD TRIP		AMPS AT 60°C HOLD TRIP		AMPS AT --°C HOLD TRIP		SECONDS AT 25°C, 10.0A MIN MAX		OHMS AT 25°C MIN MAX		OHMS AT 25°C MIN MAX	
2.1	2.9	6.0	2.1	4.7	1.0	2.8	---	---	---	5	0.018	0.030	0.018	0.060	1.5	

Recognitions:
Reference Documents:
Precedence:
Effectivity:
CAUTION:
Materials Information:

UL, TUV, CSA
PS300
This specification takes precedence over documents referenced herein.
Reference documents shall be the issue in effect on the date of invitation for bid.
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

ROHS Compliant

Directive 2002/95/EC Compliant

ELV Compliant

Directive 2000/53/EC Compliant

Pb-Free



OBSOLETE
NOT the LATEST
REVISION