



SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			






Material:


- Housing: PBT Glass Filled (UL 94V-0)
- Color: Black
- Spring Wire: 0.35mm Diameter Phosphor Bronze
Gold Plating over Nickel on contact
Tin Plating over Nickel on solder area
- Temp. Range: -40°C/+80°C
- Durability: 500 Mating cycles Min.

Electrical:

- Current rating: 1.5A Max.
- Voltage rating: 120V AC
- Insulation Resistance: 500 MΩ Min.
- Contact Resistance: 30mΩ Max.
- Dielectric Voltage: 1,000 Vrms for 60 sec. min.

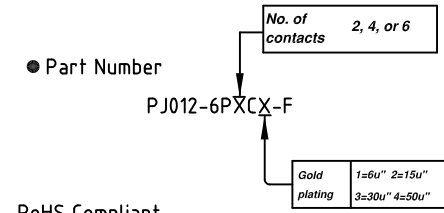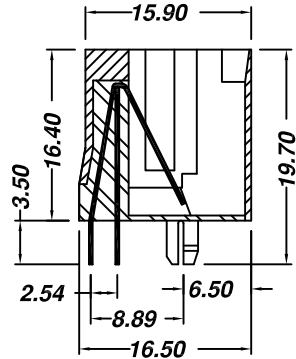

RoHS Compliant

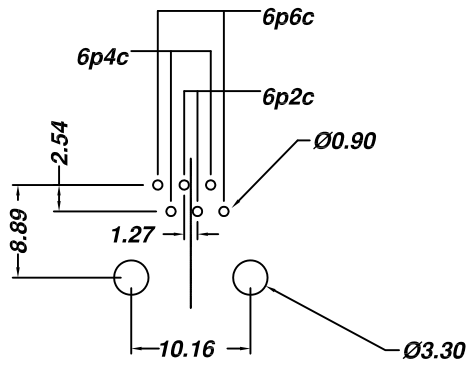

PCB LAYOUT / TOP VIEW

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		PJ012, 6 pos, top entry, thru hole			
PART NO.	PJ012-6PXCX-F	DWG NO.	PJ012-6PXCX-F.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Billy 2008.06.01	Johnn 2008.06.01	Tony 2008.06.01	Steven 2008.06.01		X.XX ±0.025 X.XXX ±0.13 X.XXXX ±0.05
				UNIT: mm	
				SCALE: NONE	
				REV.: B	
				SHEET: 01/01	