


| | | | | |
|-----|-------|-------------|----------|------|
| Rev | AWO # | Description | Date | Appr |
| - | | RELEASED | 12/22/18 | |

APPROVED: _____
 DATE: _____ TITLE: _____

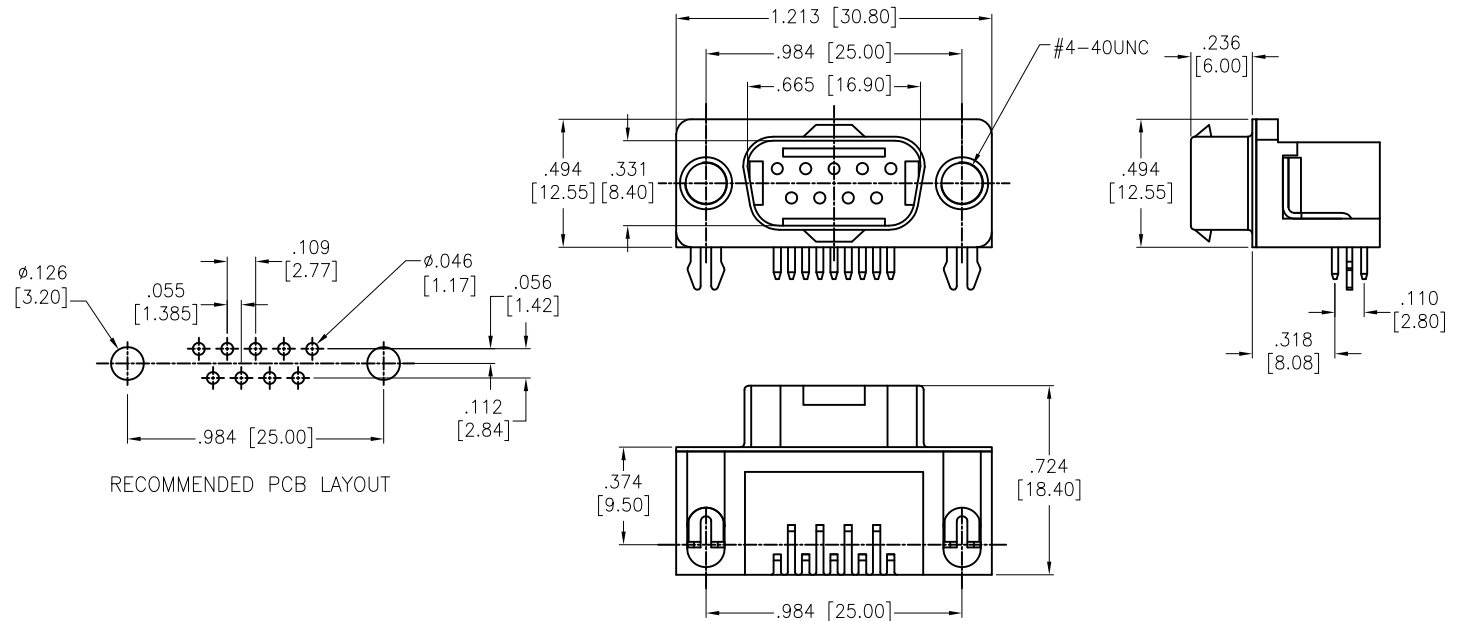

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Shell: SPCC, Nickel plated
 Ground: Brass, Nickel plated
 Rivet: Brass, Nickel plated
Plating:
 Gold flash over Nickel underplate on contact area,
 Tin over Nickel underplate on PCB tails
Electrical:
 Voltage rating: 500 V
 Current rating: 3 A
 Temperature Rating:
 Operating temperature: -55°C to +105°C
Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|--------|--------|-------|--------|
| .X | ± .10 | Ø.X | ± .10 |
| .XX | ± .020 | Ø.XX | ± .015 |
| .XXX | ± .015 | Ø.XXX | ± .010 |

ADAM TECH INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

| APPROVALS | | DATE |
|-----------|----|----------|
| DRAWN | AY | 12/22/18 |
| CHECKED | TW | 12/22/18 |
| APPROVED | | |

| | | |
|--|---------------------------|--------------|
| TITLE .318 [8.08] FOOTPRINT D-SUB MALE, 9PIN, #4-40, THREADED INSERT, FORKED BOARDLOCKS, W/BUMP | | |
| SIZE X | PART NO. DE09-PL-24-BP | REV. - |
| REF: S00200T | SCALE: NTS | SHEET 1 OF 1 |