


SANYO

Cadnica

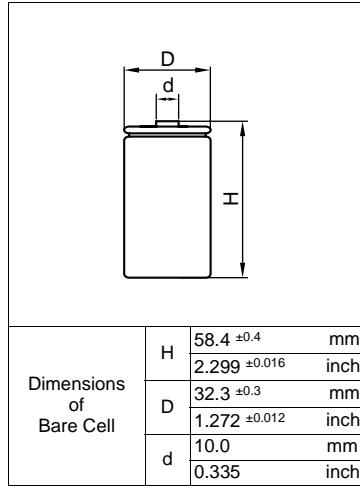


Cell Type KR-DHL Specifications


Nominal Capacity		4000mAh
Nominal Voltage		1.2V
Charging Current	Trickle	133mA
	Standard	400mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]
	Discharge	-20°C to +70°C [-4°F to 158°F]
	Storage	-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		4.2mΩ (at 1000Hz)
Weight		146g/5.15oz
Dimensions(D)×(H)		33.2 ⁰ _{-0.9} × 59.5 ⁰ _{-1.5} mm
Dimensions(D)×(H) (with tube)		1.31 ⁰ _{-0.04} × 2.34 ⁰ _{-0.06} inch

Typical Characteristics


Charge

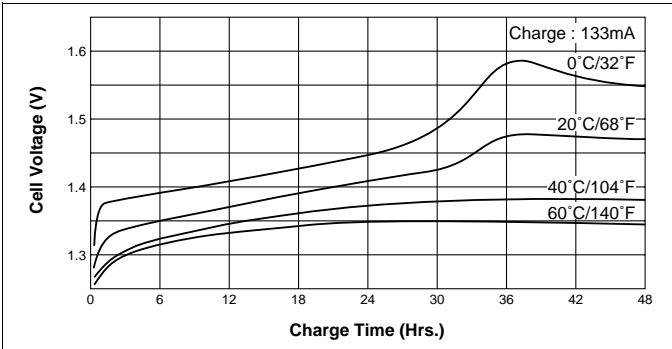


Discharge (at high rate)

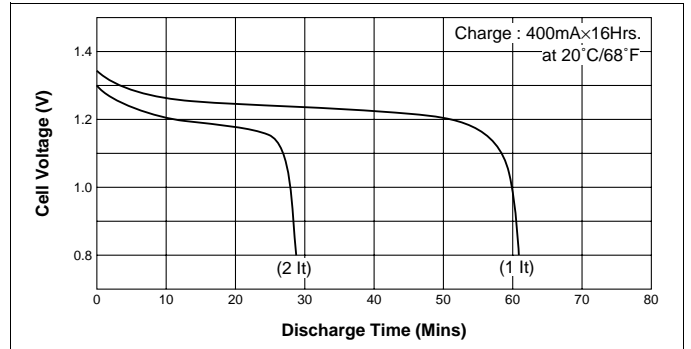


Charge

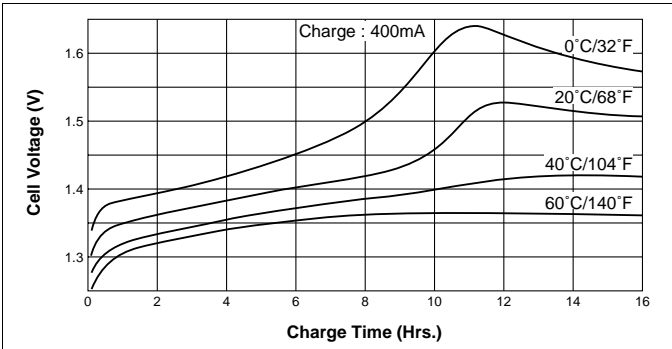

Discharge Trickle charge (at high temperature)

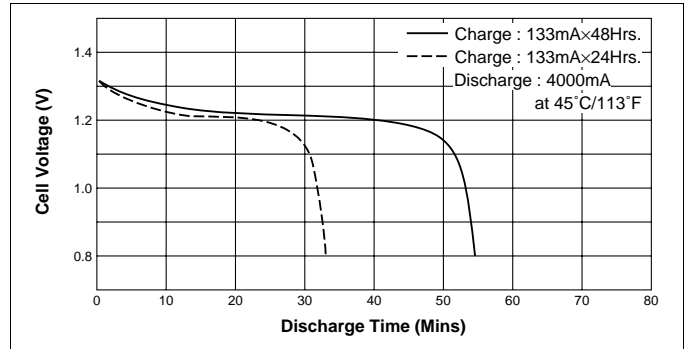

Discharge (at low rate)

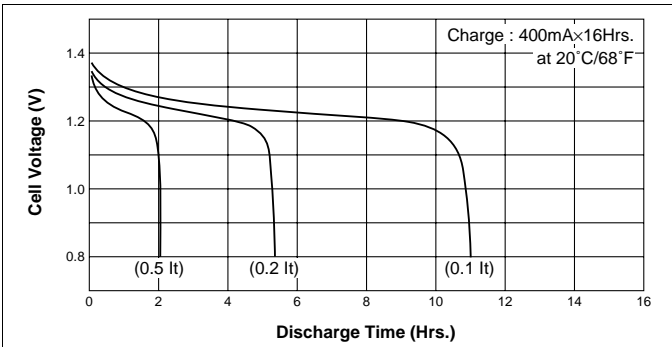

Temperature (Charge & Discharge)

