



used for: DIN EN 60603 TYPE "R"

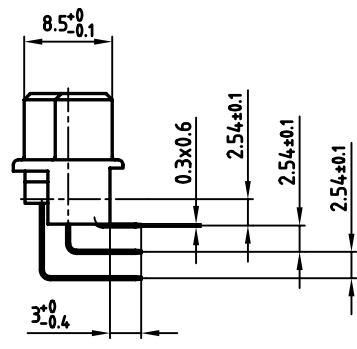


NOTES:

1. INSULATOR: PBTP UL 94 V-0; GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 122A10859X CONEC ABC

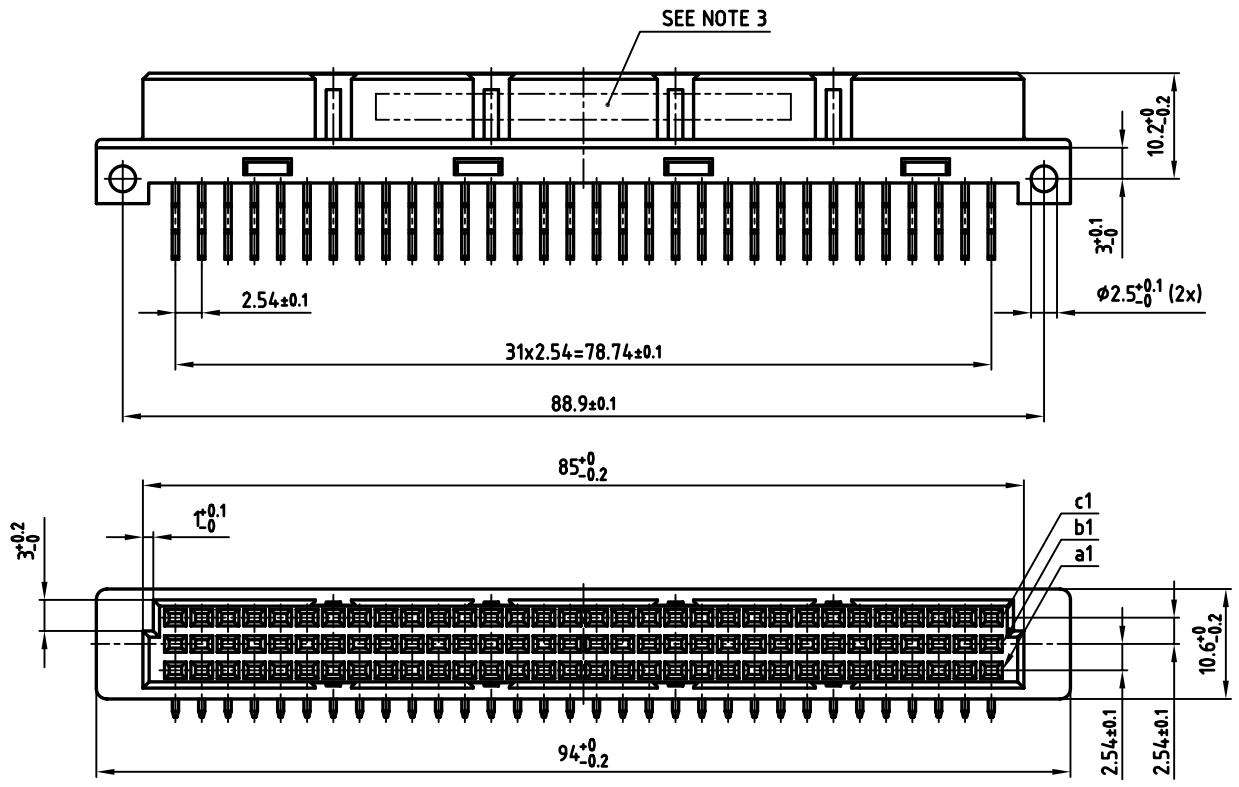

P.C.B. HOLE DRILLINGS

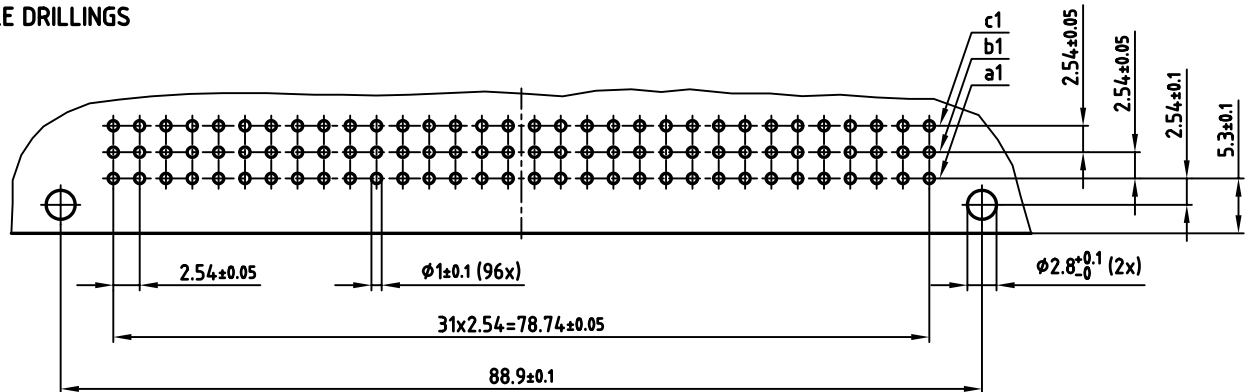

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC Gmbh DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		scale:	2:1
	dim. in mm	material:	SEE NOTES
2006	date	name	
drawn	26.01.	Lehmenkühler	
appd.	27.01.	Mickenbecker	
norm	DIN EN 60603		
d-old			

title: FEMALE CONNECTOR TYPE "R"
96pos. ANGLED

dwg no: AutoCAD 2004 DIN-A
12K1A417 3 sh:1/1

part no: 122A10859X