



5

4

3

2


1

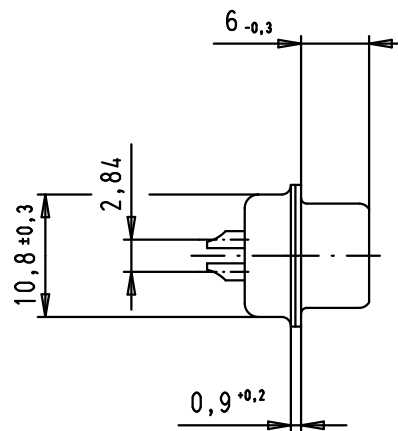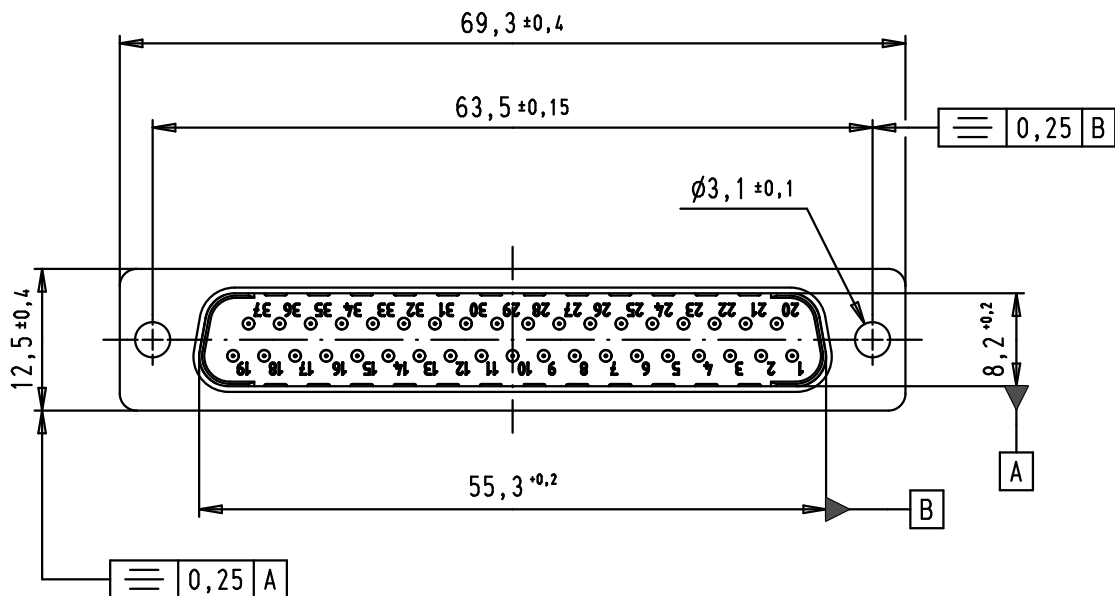



SPECIFICATIONS

Performance level	PL2
Filter type	C
Capacitance	1000 pF ± 20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1
10	3
50	12
100	20
500	34
1000	30

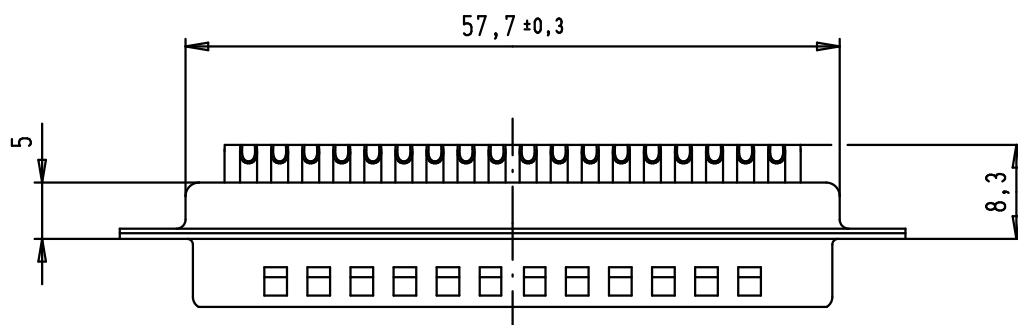

Solder buckets for AWG 20

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 37 poles, turned solder buckets	Maßstab/ Scale 1,5:1
			Detail.	08/07/02	CV			
36283	12/01/12	SD	Insp.	12/01/12	JB			
35300	01/12/08	PK	Stand.					
33800	21/08/06	PK	HARTING EURL F-95972 Paris				TB 09 64 421 7230	Blatt/ Page 1 / 1
31058	08/07/02	CV						
Mod.	Dot.	Name						

D

C

B

A