

# Power Inductors – RFC0807BV



- High voltage rating of 800 V – significantly higher than similar parts in the market
- Ideal for high-voltage / high-current battery management systems, as well as universal off-line (non-isolated) AC/DC power supplies for industrial and automotive applications
- AEC-Q200 Grade 3 (-40° to +85°C)

**Core material** Ferrite

**Terminations** RoHS compliant tin-silver over tin over copper over steel. Other terminations available at additional cost

**Environmental** RoHS compliant, halogen free

**Weight** 1.30 – 1.50 g

**Operating voltage** 800 V

**Ambient temperature** -40°C to +85°C with (40°C rise) Irms current.

**Maximum part temperature** +125°C (ambient + temp rise). [Derating](#).

**Storage temperature** Component: -40°C to +125°C.

Tray or tape packaging: -40°C to +80°C

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Packaging** 150 parts per tray (except parts with 25 mm lead length); Parts with 25 mm lead length: in fanfold tape, 800 parts per box

**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787\\_PCB\\_Washing.pdf](#).

Part number <sup>1</sup>	Inductance <sup>2</sup> ±10% (µH)	DCR (Ohms)		SRF typ <sup>3</sup> (MHz)	Isat (A) <sup>4</sup>			Irms (A) <sup>5</sup>	
		typ	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
RFC0807BV-393KE	39	0.219	0.240	11	2.85	3.20	3.40	1.05	1.45
RFC0807BV-473KE	47	0.243	0.267	10.6	2.55	2.87	3.04	0.95	1.35
RFC0807BV-563KE	56	0.275	0.303	9.7	2.35	2.66	2.84	0.90	1.25
RFC0807BV-683KE	68	0.307	0.338	8.4	2.30	2.60	2.74	0.87	1.20
RFC0807BV-823KE	82	0.342	0.376	8.0	2.13	2.37	2.53	0.85	1.15
RFC0807BV-104KE	100	0.396	0.440	7.1	1.98	2.22	2.34	0.75	1.05
RFC0807BV-124KE	120	0.442	0.486	6.7	1.76	2.00	2.12	0.70	0.98
RFC0807BV-154KE	150	0.505	0.560	5.3	1.62	1.82	1.93	0.68	0.90
RFC0807BV-184KE	180	0.580	0.640	4.4	1.42	1.61	1.70	0.65	0.87
RFC0807BV-224KE	220	0.780	0.850	4.1	1.32	1.48	1.57	0.60	0.82
RFC0807BV-274KE	270	0.867	0.960	3.6	1.20	1.34	1.43	0.50	0.70
RFC0807BV-334KE	330	0.975	1.09	3.4	1.08	1.21	1.30	0.47	0.68
RFC0807BV-394KE	390	1.280	1.54	3.3	1.03	1.16	1.23	0.45	0.63
RFC0807BV-474KE	470	1.482	1.65	2.9	0.90	1.02	1.10	0.40	0.55
RFC0807BV-564KE	560	1.68	1.85	2.7	0.85	0.93	1.01	0.38	0.52
RFC0807BV-684KE	680	2.25	2.48	2.5	0.77	0.83	0.92	0.32	0.44
RFC0807BV-824KE	820	2.57	2.83	2.1	0.68	0.77	0.82	0.30	0.40
RFC0807BV-105KE	1000	3.27	3.60	2.0	0.62	0.68	0.72	0.27	0.37
RFC0807BV-125KE	1200	3.73	4.10	1.7	0.56	0.62	0.66	0.25	0.35

1. When ordering, specify **lead length** and **termination** codes:

RFC0807BV-125KE

- Lead length:** A = 3.6 mm ±0.3 mm (special order)  
 B = 5.0 mm ±0.5 mm  
 C = 7.0 mm ±0.5 mm (special order)  
 D = 8.0 mm ±0.5 mm (special order)  
 E = 10.0 mm ±1.0 mm (special order)  
 F = 25.0 mm ±1.0 mm, packaged in fanfold tape, 800 parts per box (special order)

**Termination:** E = RoHS compliant tin-silver over tin over copper over steel. Special order: S = non-RoHS tin-lead (63/37)

- Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR-meter or equivalent.
- SRF measured using Agilent/HP 4191A or equivalent.
- DC current at 25°C that causes the specified inductance drop from its value without current.  
[Click for temperature derating information.](#)
- Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. [Click for temperature derating information.](#)
- Electrical specifications at 25°C.



www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1645-1 Revised 03/07/22


© Coilcraft Inc. 2023

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.




# Power Inductors – RFC0807BV Series


## Typical L vs Current

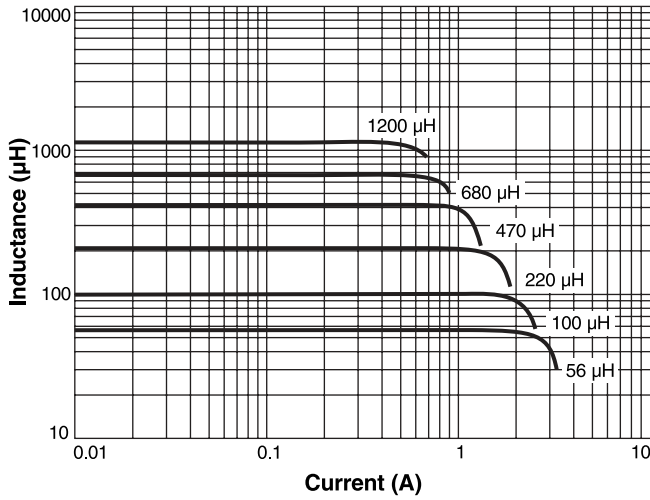


## Typical L vs Frequency

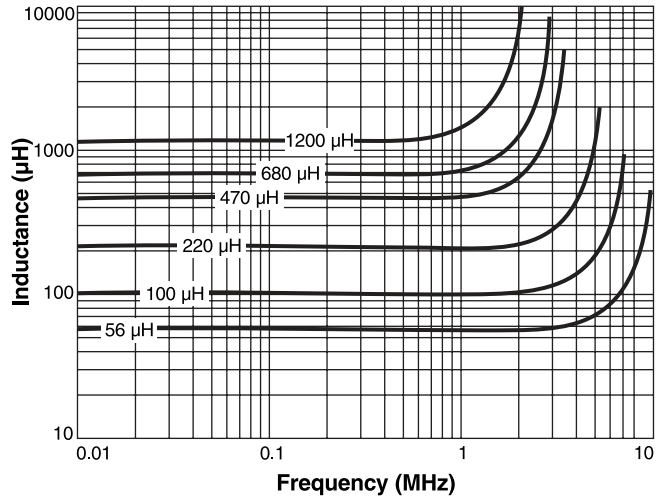

## Dimensions

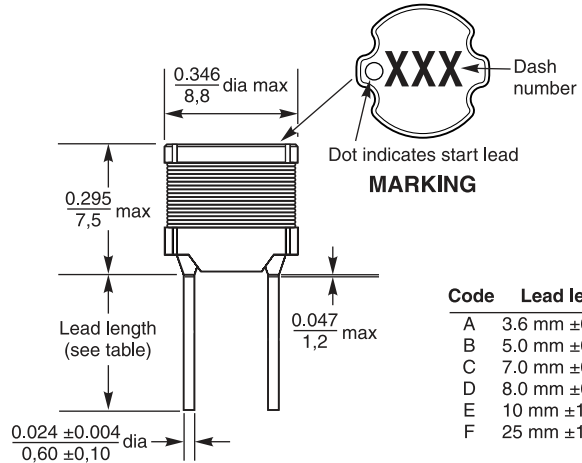

Code	Lead length
A	3.6 mm ±0.3 mm
B	5.0 mm ±0.5 mm
C	7.0 mm ±0.5 mm
D	8.0 mm ±0.5 mm
E	10 mm ±1.0 mm
F	25 mm ±1.0 mm



Dimensions are in  $\frac{\text{inches}}{\text{mm}}$