

MMV Series

Automotive Grade Chip



FEATURES

- AEC-Q200 Compliance
- Highly reliable multilayer electrode construction
- Compatible with all soldering process

APPLICATIONS

- Automotive Industry
- Telecommunication Equipments
- Radio and Tape Recorders, TV Tuners
- Digital Cameras, Watches, Pocket Calculators
- Computers, Instruments


SERIES SPECIFICATIONS

Series	Power @70°C mW	Jumper Current Rated/Max. Overload	Max. Oper. Voltage	Overload Voltage	Resistance Range (Ω)
Standard					
MMV01 (0201)	1/20W	0.5A / 1A	25V	50V	1Ω - 10MΩ
MMV02 (0402)	1/16W	1A / 2A	50V	100V	1Ω - 10MΩ
MMV03 (0603)	1/10W	1A / 3A	75V	150V	1Ω - 10MΩ
MMV05 (0805)	1/8W	2A / 5A	150V	300V	1Ω - 10MΩ
MMV06 (1206)	1/4W	2A / 5A	200V	400V	1Ω - 10MΩ
MMV10 (1210)	1/2W	2A / 5A	200V	400V	1Ω - 10MΩ
MMV11 (2010)	3/4W	2A / 5A	200V	400V	1Ω - 10MΩ
MMV12 (2512)	1W	2A / 5A	250V	500V	1Ω - 10MΩ
High Precision					
MMV02 (0402)	1/16W		50V	100V	10Ω - 1MΩ
MMV03 (0603)	1/10W		75V	150V	10Ω - 1MΩ
MMV05 (0805)	1/8W		150V	300V	10Ω - 1MΩ
MMV06 (1206)	1/4W		200V	400V	10Ω - 1MΩ
MMV10 (1210)	1/3W		200V	400V	10Ω - 1MΩ
MMV11 (2010)	3/4W		200V	400V	10Ω - 1MΩ
MMV12 (2512)	1W		250V	500V	10Ω - 1MΩ
High Power Rating					
MMV02 (0402)	1/8W		50V	100V	1Ω - 1MΩ
MMV03 (0603)	1/4W		75V	150V	1Ω - 1MΩ
MMV05 (0805)	1/3W		150V	300V	1Ω - 1MΩ
MMV06 (1206)	1/2W		200V	400V	1Ω - 1MΩ
MMV11 (2010)	1W		200V	400V	1Ω - 1MΩ

CHARACTERISTICS

Oper. Temp. Range	-55°C to +155°C (MMV01: -55°C to +125°C)	
Resistance Tolerance	E24 & E96	±1%
	E24	±5%
	High-precision	±0.5%
Jumper Resistance	<50mΩ	
TCR	<1/10W	1/10+
	1Ω - 9.76Ω	±400 ±250
	10Ω - 1MΩ	±200 ±100
	1.02MΩ - 10MΩ	±400 ±250
Storage Temperature	15~28°C; Humidity < 80%RH	
Rated Voltage	$\sqrt{P \cdot R}$ or Max. Operating Voltage whichever is lower	

Derating

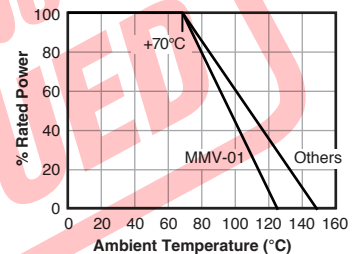


(continued)

MMV Series


Automotive Grade Chip

SOLDERING

IR Reflow Soldering

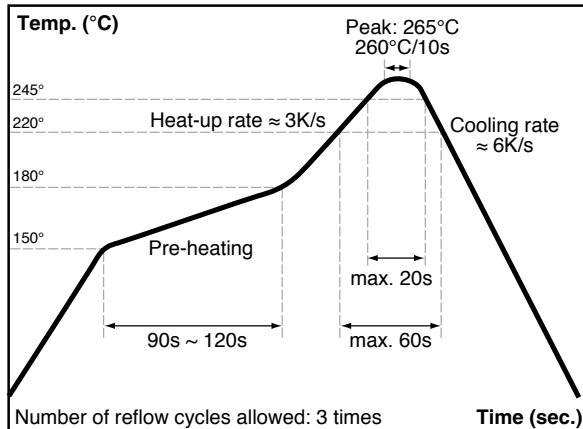


Wave Soldering (Flow Soldering)

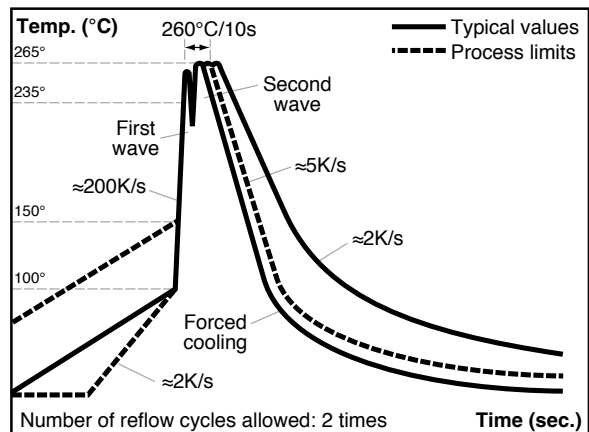


- (1) Time of IR reflow soldering at maximum temperature point 260°C: 10s
- (2) Time of wave soldering at maximum temperature point 260°C: 10s
- (3) Time of soldering iron at maximum temperature point 410°C: 5s

DIMENSIONS

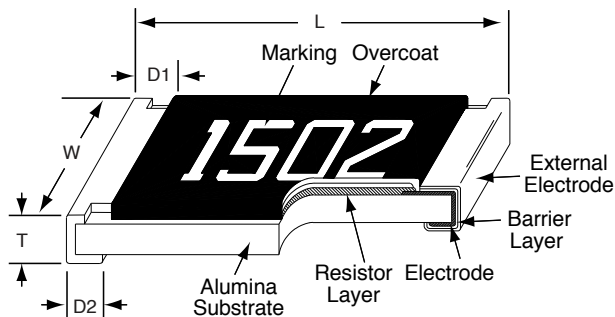

Land pattern



Type	Size	L	W	T	D1	D2	A	B	C	Weight (g) (per 1,000)
MMV01	0201	0.60 ±0.03	0.30 ±0.03	0.23 ±0.03	0.15 ±0.05	0.15 ±0.05	0.30	0.25	0.30	0.150
MMV02	0402	1.00 ±0.05	0.50 ±0.05	0.30 ±0.05	0.20 ±0.10	0.25 ±0.10	0.50	0.45	0.60	0.620
MMV03	0603	1.60 ±0.10	0.80 ±0.10	0.45 ±0.10	0.30 ±0.20	0.30 ±0.20	0.90	0.60	0.90	2.042
MMV05	0805	2.00 ±0.10	1.25 ±0.15	0.50 ±0.10	0.30 ±0.20	0.40 ±0.20	1.20	0.70	1.30	4.368
MMV06	1206	3.20 ±0.20	1.60 ±0.15	0.55 ±0.10	0.50 ±0.20	0.50 ±0.20	2.00	0.90	1.60	8.947
MMV10	1210	3.20 ±0.20	2.50 ±0.20	0.55 ±0.10	0.50 ±0.20	0.50 ±0.20	2.00	0.90	2.80	15.959
MMV11	2010	5.00 ±0.20	2.50 ±0.20	0.55 ±0.10	0.60 ±0.20	0.60 ±0.20	3.80	0.90	2.80	24.241
MMV12	2512	6.30 ±0.20	3.20 ±0.20	0.55 ±0.10	0.60 ±0.20	0.60 ±0.20	4.90	1.60	3.50	39.448

(continued)

MMV Series

Automotive Grade Chip

PERFORMANCE


Item	Requirement		Jumper	Test Method
	±1% and below	±5%		
TCR		As Spec.		JIS-C-5201-1 4.8; IEC-60115-1 4.8; -55°C~+125°C, 25°C is the reference temperature
Short Time Overload	±(1.0%+0.05Ω)	±(2.0%+0.05Ω)	<50mΩ	JIS-C-5201-1 4.13; IEC-60115-1 4.13; RCWV*2.5 or Max. Overload Voltage whichever is lower for 5 seconds
Insulation Resistance		≥10G		JIS-C-5201-1 4.6; IEC-60115-1 4.6; Max. Overload Voltage for 1 minute
Operational Life	±(1.0%+0.10Ω)	±(2.0%+0.10Ω)	<100mΩ	MIL-STD-202 Method 108; Condition D Steady State TA=125°C at derated power.; Measurement at 24±4 hours after test conclusion.
Biased Humidity	±(1.0%+0.10Ω)	±(2.0%+0.10Ω)	<100mΩ	MIL-STD-202 Method 103; 1000 hrs 85°C/85%RH 10% of operating power
High Temperature Exposure	±(1.0%+0.05Ω)	±(1.5%+0.10Ω)	<50mΩ	MIL-STD-202 Method 108; at +155°C for 1000 hrs
Board Flex	±(1.0%+0.05Ω)	±(1.0%+0.05Ω)	<50mΩ	AEC-Q200-005; Bending once for 60 seconds ; 2010, 2512 sizes: 2mm Other sizes: 3mm
Solderability		95% min. coverage		JIS-C-5201-1 4.17; IEC-60115-1 4.17; J-STD-002; 245±5°C for 3 seconds
Resistance to Soldering Heat	±(0.5%+0.05Ω)	±(1.0%+0.05Ω)	<50mΩ	MIL-STD-202 Method 210; 260±5°C for 10 seconds
Voltage Proof		No breakdown or flashover		JIS-C-5201-1 4.7; IEC-60115-1 4.7; 1.42 times Max. Operating Voltage for 1 minute
Leaching		Individual leaching area ≤5% Total leaching area ≤10%		JIS-C-5201-1 4.18; IEC-60068-2-58 8.2.1; 260±5°C for 30 seconds
Temperature Cycling	±(0.5%+0.05Ω)	±(1.5%+0.05Ω)	<50mΩ	JESD22 Method JA-104; -55°C to +125°C, 1000 cycles
Mechanical Shock	±(0.25%+0.05Ω)	±(1.0%+0.05Ω)	<50mΩ	MIL-STD-202 Method 213; Wave Form: Tolerance for half sine shock pulse. ; Peak value is 100g's. Normal duration (D) is 6.
Vibration	±(0.5%+0.05Ω)	±(1.0%+0.05Ω)	<50mΩ	MIL-STD-202 Method 204; 5 g's for 20 min., 12 cycles each of 3 orientations,; 10-2000 Hz
ESD		±(1%+0.05Ω)		AEC-Q200-002; Human body, 2KV
Resistance to Solvents	No visible damage on appearance and marking.			MIL-STD-202 Method 215; Add Aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents.
Terminal Strength		No broken		AEC-Q200-006; Force of 1.8kg for 60 seconds.
Flammability	No ignition of the tissue paper or scorching or the pinewood board			UL-94; V-0 or V-1 are acceptable. Electrical test not required.; RCWV(Rated Continuous Working Voltage)=√(P*R) or Max. Operating Voltage whichever is lower.

(continued)

MMV Series


Automotive Grade Chip

TAPE AND REEL

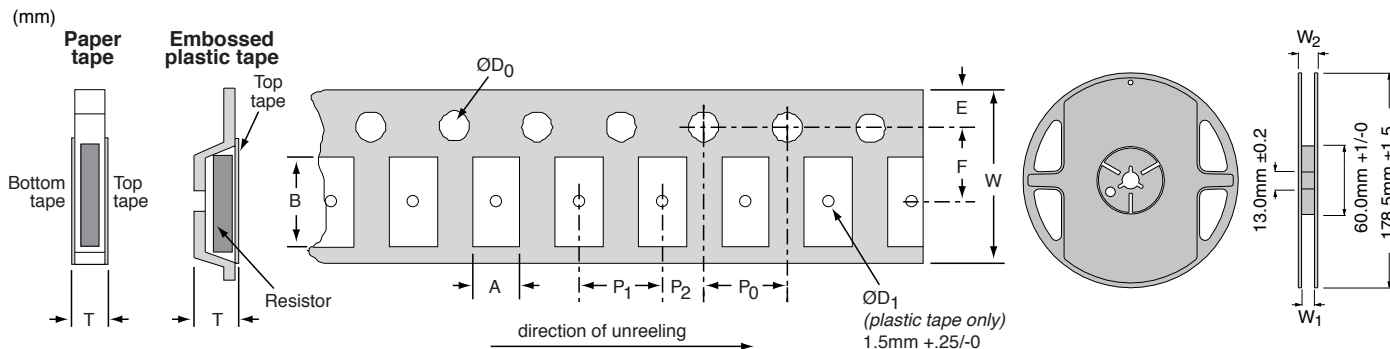

	A	B	W	E	F	P0	P1	P2	D0	T	W1	W2	Qty.
Paper tape													
MMV-01	0.38 ±.05	0.68 ±.05	8.0 ±.20	1.75 ±.10	3.50 ±.05	4.00 ±.10	2.00 ±.05	2.00 ±.05	1.50+0.1,-0	0.42 ±.20	9.0 ±.5	12.5 ±.5	10,000
MMV-02	0.65 ±.10	1.15 ±.10	8.0 ±.20	1.75 ±.10	3.50 ±.05	4.00 ±.10	2.00 ±.05	2.00 ±.05	1.50+0.1,-0	0.45 ±.10	9.0 ±.5	12.5 ±.5	10,000
MMV-03	1.10 ±.10	1.90 ±.10	8.0 ±.20	1.75 ±.10	3.50 ±.05	4.00 ±.10	4.00 ±.05	2.00 ±.05	1.50+0.1,-0	0.70 ±.10	9.0 ±.5	12.5 ±.5	5,000
MMV-05	1.60 ±.10	2.40 ±.20	8.0 ±.20	1.75 ±.10	3.50 ±.05	4.00 ±.10	4.00 ±.05	2.00 ±.05	1.50+0.1,-0	0.85 ±.10	9.0 ±.5	12.5 ±.5	5,000
MMV-06	1.90 ±.10	3.50 ±.20	8.0 ±.20	1.75 ±.10	3.50 ±.05	4.00 ±.10	4.00 ±.05	2.00 ±.05	1.50+0.1,-0	0.85 ±.10	9.0 ±.5	12.5 ±.5	5,000
MMV-10	2.90 ±.10	3.50 ±.20	8.0 ±.20	1.75 ±.10	3.50 ±.05	4.00 ±.10	4.00 ±.05	2.00 ±.05	1.50+0.1,-0	0.85 ±.10	9.0 ±.5	12.5 ±.5	5,000
Embossed plastic tape													
MMV-11	2.8 ±.10	5.5 ±.10	12.0 ±.30	1.75 ±.10	5.5 ±.05	4.00 ±.10	4.00 ±.10	2.00 ±.05	1.50+0.1,-0	1.2+0	13.0 ±.5	15.5 ±.5	4,000
MMV-12	3.5 ±.10	6.7 ±.10	12.0 ±.30	1.75 ±.10	5.5 ±.05	4.00 ±.10	4.00 ±.10	2.00 ±.05	1.50+0.1,-0	1.2+0	13.0 ±.5	15.5 ±.5	4,000

ORDERING INFORMATION

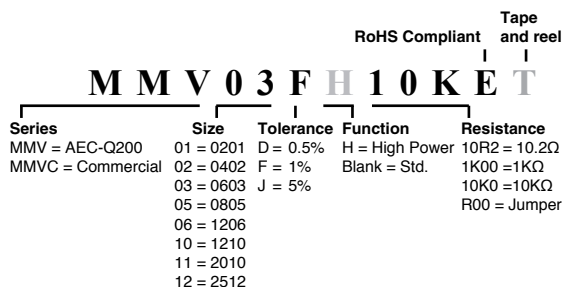

Marking for

1% for 0805-2512

Examples

1000 = 100Ω
2201 = 2.2KΩ
1002 = 10KΩ
4992 = 49.9KΩ
1003 = 100KΩ

Marking for 5% for 0603-2512 (E24)

Examples

101 = 100Ω
102 = 1KΩ

E24
10 11 12 13 15 16
18 20 22 24 27 30
33 36 39 43 47 51
56 62 68 75 82 91

Marking for 1% for 0603 (E24)

3 digits marking in E24, When the E24 and E96 are the same resistance, this marking in E96

Examples

01A = 100Ω
05C = 11KΩ
123 = 12KΩ
273 = 27KΩ

Marking for 1% for 0603 (E96)

Code	E96	Code	E96	Code	E96	Code	E96
01	100	25	178	49	316	73	562
02	102	26	182	50	324	74	576
03	105	27	187	51	332	75	590
04	107	28	191	52	340	76	604
05	110	29	196	53	348	77	619
06	113	30	200	54	357	78	634
07	115	31	205	55	365	79	649
08	118	32	210	56	374	80	665
09	121	33	215	57	383	81	681
10	124	34	221	58	392	82	698
11	127	35	226	59	402	83	715
12	130	36	232	60	412	84	732
13	133	37	237	61	422	85	750
14	137	38	243	62	432	86	768
15	140	39	249	63	442	87	787
16	143	40	255	64	453	88	806
17	147	41	261	65	464	89	825
18	150	42	267	66	475	90	845
19	154	43	274	67	487	91	866
20	158	44	280	68	499	92	887
21	162	45	287	69	511	93	909
22	165	46	294	70	523	94	931
23	169	47	301	71	536	95	953
24	174	48	309	72	549	96	976

Code	Multiplier
A	10 ⁰
B	10 ¹
C	10 ²
D	10 ³
E	10 ⁴
F	10 ⁵
G	10 ⁶
H	10 ⁷
X	10 ⁻¹
Y	10 ⁻²
Z	10 ⁻³

Examples

1000 = 100Ω
2201 = 2.2KΩ
1002 = 10KΩ
4992 = 49.9KΩ
1003 = 100KΩ