




DESIGN KIT

WCAP-CSGP Multilayer Ceramic Chip Capacitors 0402

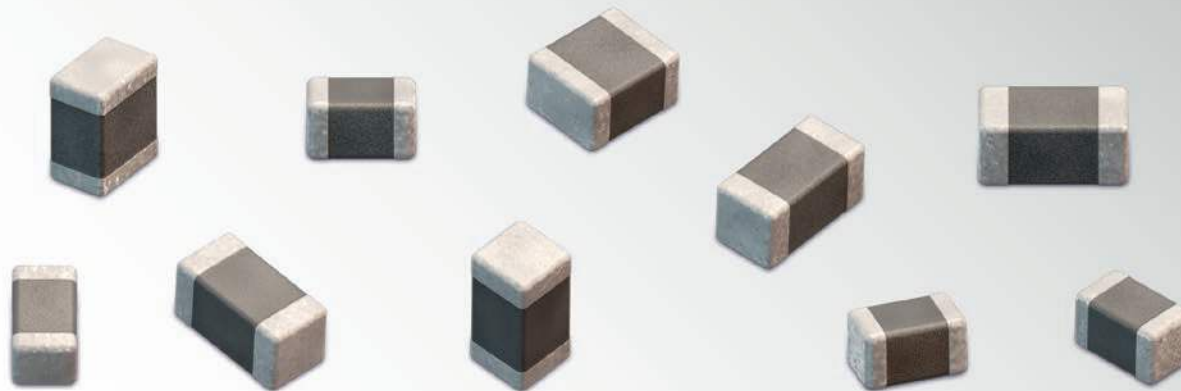

SIZE:

0402

TECHNICAL DATA:

Capacitance Range: 1pF ~ 4.7µF
Rated Voltages: 6.3V, 10V, 16V, 25V, 50V
Dielectrics: NPO, X7R, X5R
Termination: Cu / Ni / Sn

Order Code 885 050

Version 1.0

WCAP-CSGP

Multilayer Ceramic Chip Capacitors 0402

NPO		X7R		X5R	
885 012 005 017 10V NP00402471J010DFCT10000 470pF, ±5%, H=0.5mm Q≥1000, IR≥10G Ohm	885 012 005 040 25V NP00402100J025DFCT10000 10pF, ±5%, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 048 25V NP00402221J025DFCT10000 200pF, ±5%, H=0.5mm Q≥1000, IR≥10G Ohm	885 012 005 056 50V NP00402150J050DFCT10000 15pF, ±5%, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 205 036 16V X7R0402683K016DFCT10000 68,000pF, ±10%, H=0.5mm DF≤5%, IR≥ 7.4G Ohm	885 012 205 044 25V X7R0402102K025DFCT10000 1,000pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm
885 012 005 018 10V NP00402102J010DFCT10000 1,000pF, ±5%, H=0.5mm Q≥1000, IR≥10G Ohm	885 012 005 041 25V NP00402150J025DFCT10000 15pF, ±5%, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 049 50V NP004021R0D050DFCT10000 1.0pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 005 057 50V NP00402220J050DFCT10000 22pF, ±5%, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 205 037 16V X7R0402104K016DFCT10000 100,000pF, ±10%, H=0.5mm DF≤5%, IR≥ 5G Ohm	885 012 205 045 25V X7R0402152K025DFCT10000 1,500pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm
885 012 005 034 25V NP004021R0D025DFCT10000 1.0pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 042 25V NP00402220J025DFCT10000 22pF, ±5%, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 050 50V NP004021R5D050DFCT10000 1.5pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 005 058 50V NP00402330J050DFCT10000 33pF, ±5%, T=0.5mm Q≥1000, IR≥ 10G Ohm	885 012 205 038 25V X7R0402101K025DFCT10000 100pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm	885 012 205 046 25V X7R0402222K025DFCT10000 2,200pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm
885 012 005 035 25V NP004021R5D025DFCT10000 1.5pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 043 25V NP00402330J025DFCT10000 33pF, ±5%, H=0.5mm Q≥1000, IR≥10G Ohm	885 012 005 051 50V NP004022R2D050DFCT10000 2.2pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 005 059 50V NP00402470J050DFCT10000 47pF, ±5%, H=0.5mm Q≥1000, IR≥ 10G Ohm	885 012 205 039 25V X7R0402151K025DFCT10000 150pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm	885 012 205 047 25V X7R0402332K025DFCT10000 3,300pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm
885 012 005 036 25V NP004022R2D025DFCT10000 2.2pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 044 25V NP00402470J025DFCT10000 47pF, ±5%, H=0.5mm Q≥1000, IR≥10G Ohm	885 012 005 052 50V NP004023R3D050DFCT10000 3.3pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 005 060 50V NP00402680J050DFCT10000 68pF, ±5%, H=0.5mm Q≥1000, IR≥ 10G Ohm	885 012 205 040 25V X7R0402221K025DFCT10000 220pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm	885 012 205 048 25V X7R0402472K025DFCT10000 4,700pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm
885 012 005 037 25V NP004023R3D025DFCT10000 3.3pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 045 25V NP00402680J025DFCT10000 68pF, ±5%, H=0.5mm Q≥1000, IR≥10G Ohm	885 012 005 053 50V NP004024R7D050DFCT10000 4.7pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 005 061 50V NP00402101J050DFCT10000 100pF, ±5%, H=0.5mm Q≥1000, IR≥ 10G Ohm	885 012 205 041 25V X7R0402331K025DFCT10000 330pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm	885 012 205 049 25V X7R0402682K025DFCT10000 6,800pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm
885 012 005 038 25V NP004024R7D025DFCT10000 4.7pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 046 25V NP00402101J025DFCT10000 100pF, ±5%, H=0.5mm Q≥1000, IR≥10G Ohm	885 012 005 054 50V NP004026R8D050DFCT10000 6.8pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 005 062 50V NP00402151J050DFCT10000 150pF, ±5%, H=0.5mm Q≥1000, IR≥ 10G Ohm	885 012 205 042 25V X7R0402471K025DFCT10000 470pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm	885 012 205 050 25V X7R0402103K025DFCT10000 10,000pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm
885 012 200 503 9 25V NP004026R8D025DFCT10000 6.8pF, ±0.5pF, H=0.5mm Q≥400+20C, IR≥10G Ohm	885 012 005 047 25V NP00402151J025DFCT10000 100pF, ±5%, H=0.5mm Q≥1000, IR≥10G Ohm	885 012 005 055 50V NP00402100J050DFCT10000 220pF, ±5%, H=0.5mm Q≥400+20C, IR≥ 10G Ohm	885 012 005 063 50V NP00402221J050DFCT10000 220pF, ±5%, H=0.5mm Q≥1000, IR≥ 10G Ohm	885 012 205 043 25V X7R0402681K025DFCT10000 680pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm	885 012 205 051 25V X7R0402153K025DFCT10000 15,000pF, ±10%, H=0.5mm DF≤3.5%, IR≥ 10G Ohm

Dielectric	Operating Temperature
NPO	-55°C to +125°C
X7R	-55°C to +125°C
X5R	-55°C to +85°C

Dielectric	Capacitance Characteristics*
NPO	± 30ppm/°C; ± 0.54%/°C
X7R	± 15%
X5R	± 15%

*within Operating Temperature Range

	6.3V
	10V
	16V
	25V
	50V



EMC COMPONENTS | INDUCTORS | TRANSFORMERS | RF COMPONENTS | CIRCUIT PROTECTION | EMC SHIELDING MATERIAL | CAPACITORS | CONNECTORS | SWITCHES | ASSEMBLY TECHNIQUE | POWER ELEMENTS

Important information: Würth Elektronik's design kits contain reference components. These components correspond with the current product development status on the day of supply. Exchange of the reference components to components with up-to-date product development status is not carried out automatically. No liability is taken for the use of these reference components. Therefore, please request new samples prior to releases for series production and product release.

Please check datasheets on www.we-online.com for specifications. Würth Elektronik eiSos GmbH & Co. KG, EMC & Inductive Solutions. © 2015

www.we-online.com

All products
ex stock!