


		DIMENSIONS						
SIZE		A ^{±1.20} _{±0.047}	B ^{±1.20} _{±0.047}	C ^{±0.80} _{±0.031}	D ^{±0.80} _{±0.031}	E ^{±0.80} _{±0.031}	F ^{±0.80} _{±0.031}	G ^{±0.80} _{±0.031}
9	mm	15.00	30.80	15.00	24.40	50.80	18.00	26.20
	in.	0.59	1.21	0.59	0.96	2.00	0.71	1.03
25	mm	15.80	53.30	23.10	34.50	72.40	24.30	36.60
	in.	0.62	2.10	0.91	1.36	2.85	0.96	1.44

BACKSHELL KIT INCLUDES:

- (2) BACKSHELL HALVES
- (3) HOUSING SCREWS
- (1) 4-40 LONG FLAT HEAD SCREW
- (1) 4-40 SHORT FLAT HEAD SCREW
- (1) SET OF COMPRESSION INSERTS-VARIOUS SIZES (SEE DIAGRAM BELOW)

BACKSHELL MATERIAL: DIE CAST ZINC ALLOY, NICKEL PLATED
 4-40 FLAT HEAD SCREWS: STEEL, ZINC PLATED
 HOUSING SCREWS: STEEL, ZINC PLATED
 COMPRESSION INSERT: ABS, UL RECOGNIZED
 OPERATING TEMP: -40°C TO +120°C

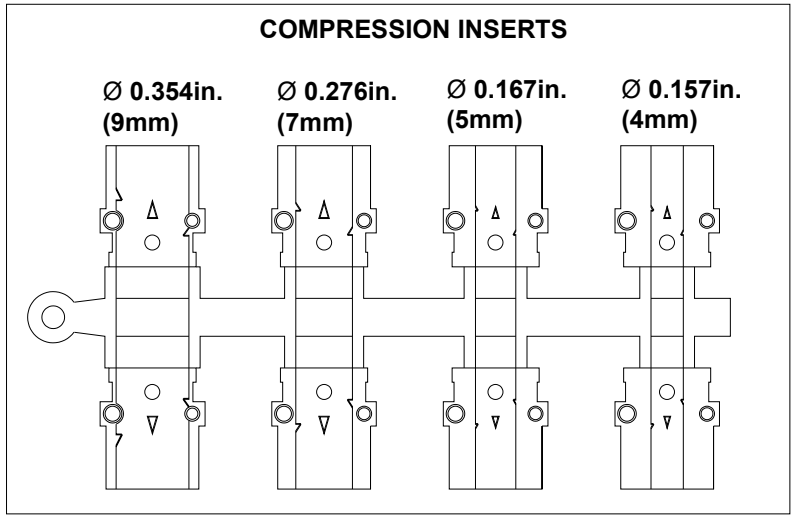

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: B. BRIDGES
		DATE: 02/14/2018

UNITS = "AS SPECIFIED" DO NOT SCALE FROM DRAWING

	SCALE: NTS	SHEET 1 OF 1	REV 2
	DWG NO. 962-YYY-030R121		