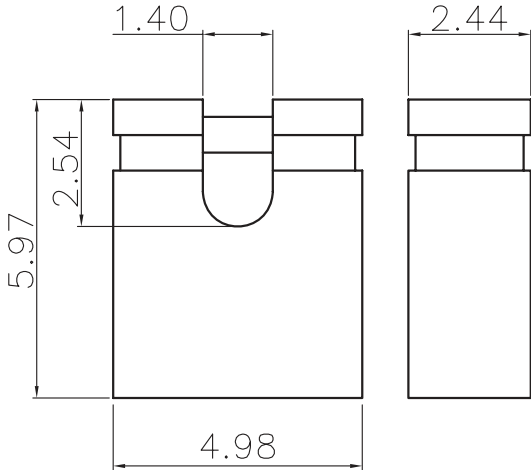


1	2	3	4	5
---	---	---	---	---





TECHNICAL CHARACTERISTICS

MATERIAL  
INSULATOR: PBT  
FLAMMABILITY RATING: UL94-V0  
COLOR: BLUE  
CONTACT MATERIAL: COPPER ALLOY  
CONTACT TYPE: STAMPED  
CONTACT PLATING: GOLD  
QUALITY CLASS: 25 MATING CYCLES  
PITCH: 2.54 MM

ENVIRONMENTAL  
OPERATING TEMPERATURE: -40 UP TO 125°C  
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
CURRENT RATING: 3 A  
WORKING VOLTAGE: 250 VAC  
INSULATOR RESISTANCE: >1000 MOHM  
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/MN  
CONTACT RESISTANCE: 20 mOHM MAX

PACKAGING  
BAG

RoHS Compliant								
G	02-MAR-17	CERTIFIED	AK	<div>PROJECTION:</div> <div></div>	GENERAL TOLERANCE	<div></div> <div>WÜRTH ELEKTRONIK</div>		
F	18-JAN-17	QUALITY CLASS	AK		.X = $\pm$ 0.2			
E	03-JAN-17	REMOVE VIEW	AK		.XX = $\pm$ 0.15			
D	24-NOV-09	STANDARD	JP					
C	11-DEC-06	DRAW	EC	APPROVAL: GMo	UNIT: MM	DESCRIPTION: 2.54MM JUMPER WITH TEST POINT		SIZE <b>A4</b>
B	10-MAY-04	LEAD FREE	JP		SCALE:			
A	06-MAR-98	PDF	JP		SHEET: 1/2	WERI PART NO: 609 002 136 21		
REV	DATE	FILE	BY		DRAW: PEARL			

