



| PANDUIT<br>PART NO. | PRODUCT WORKS<br>WITH PANDUIT<br>PART NUMBERS: | APPLICATION<br>SURFACE:              | WEIGHT<br>lbs / 10<br>(g) / pcs. |
|---------------------|------------------------------------------------|--------------------------------------|----------------------------------|
| JMSBCB87-3-_-       | JMJH2 JMOD CABLE SUPPORT                       | BEAMS UP TO 0.75"<br>(19.05mm) THICK | 7.34<br>(3329)                   |

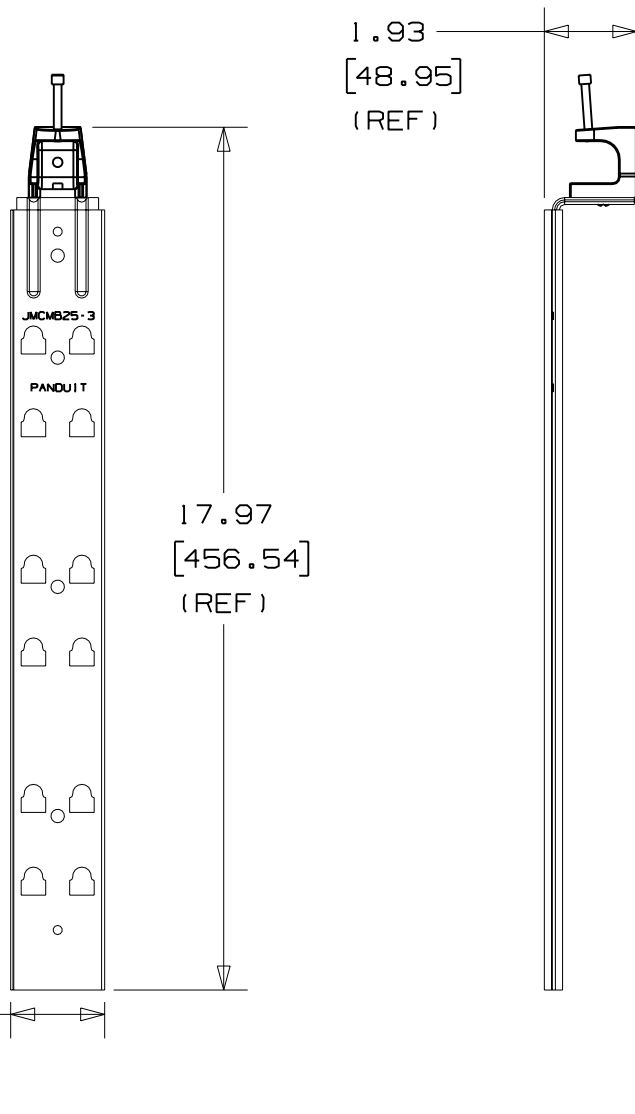

## NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- SCREW USED TO ATTACH THE BEAM CLAMP TO THE METAL BRACKET CAN BE LOOSENED ALLOWING USER TO VARY INSTALLED ANGLE. AFTER BEAM CLAMP HAS BEEN ROTATED TO THE DESIRED ANGLE, USER SHOULD RE-TIGHTEN THE SCREW.
- ASSEMBLY COMPONENT MATERIALS:
  - PRE-GALVANIZED STEEL (JMCMB25-1)
  - ZINC PLATED STEEL (BOLT)
  - MALLEABLE IRON (BEAM CLAMP)
- RATED STATIC LOAD:  
180 lbs. (81.65kg)
- JMSBCB87-3 WILL ACCEPT UP TO SIX MJH2 J HOOK PRODUCTS.

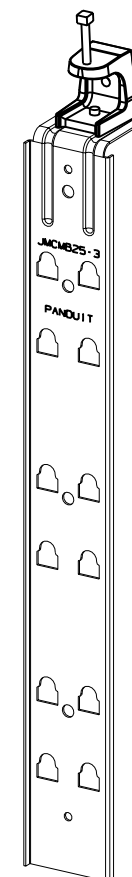

DIMENSIONS IN BRACKETS ARE METRIC [ mm ]

CAD FILENAME/LAYERS G02672DV\_PS\_JMSBCB873\_01

**PANDUIT**

CORP. TINLEY PARK, ILLINOIS

JMOD BEAM CLAMP  
BRACKET ASSEMBLY  
(JMSBCB87-3-\_-)UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X)  $\pm 0.05$  (1.3) (XXX)  $\pm 0.010$  (0.25)  
(.XX)  $\pm 0.02$  (0.5) ANGLES  $\pm 5^\circ$ UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JAD

MAT'L:

SCALE NONE

DATE  
3/7/03

SEE NOTE 3

DRAWING NO.

GB2672DV

DWG  
A  
SIZE

| I   | 2/20/06 | JAD |     | UPDATE APPLICATION SURFACE<br>CALLOUT, WAS .88" | GB2722DV | I |      |     |  |
|-----|---------|-----|-----|-------------------------------------------------|----------|---|------|-----|--|
| REV | DATE    | BY  | CHK | DESCRIPTION                                     | ECN      | R | CUST | SUP |  |