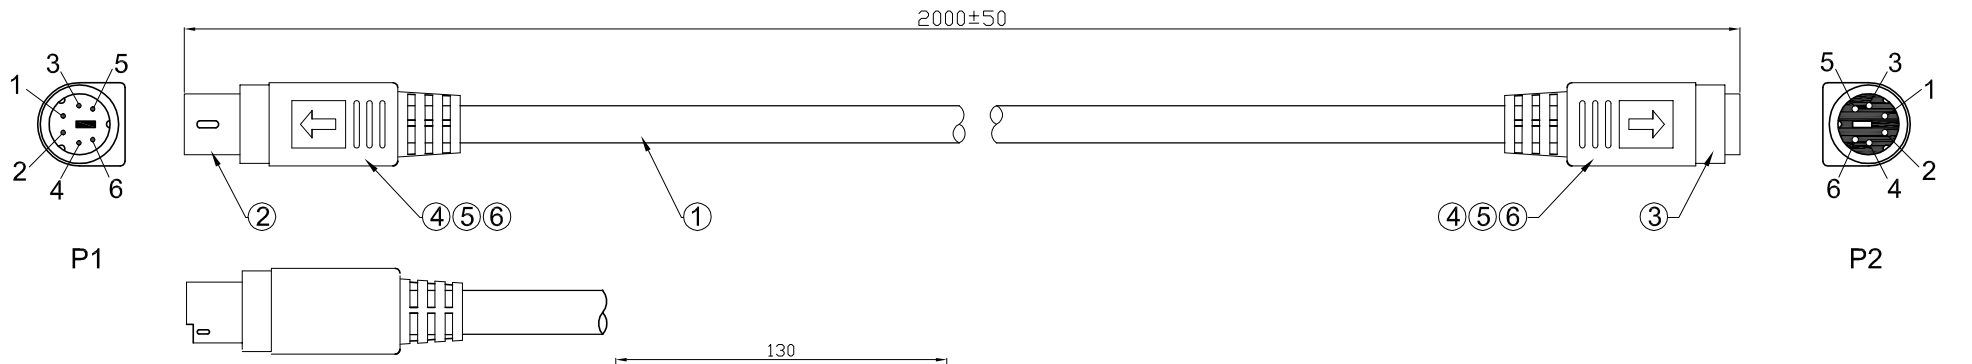

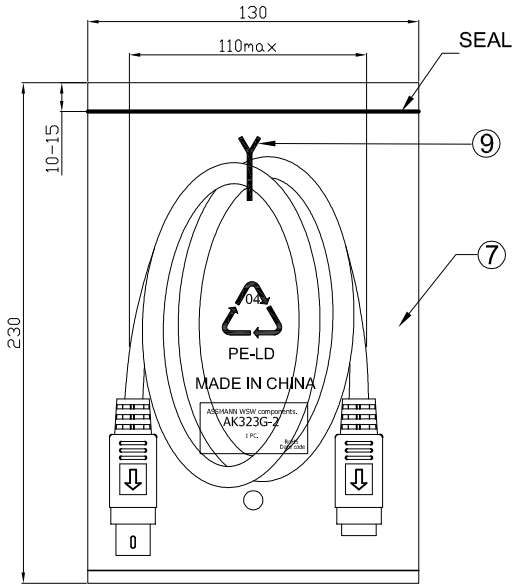

1PC/PE BAG

PIN ASSIGNMENT

P1		P2
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
SHELL	D	SHELL

Electrical test:
1. 100% short, open, miss wire test
2. Conduct resistance: 2Ω max.
3. Insulator resistance: 10MΩ min.
4. Hi-Pot test: DC 300V/10ms

No.	NAME	Q'TY	SPECIFICATION
⑨	TIE	1	WHITE L=100mm
⑧	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑦	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA" +"1PC"
⑥	TUBE	2	HEAT SHRINK TUBE BLACK OD0.6*7MM
⑤	IN JACKET	5.2g	CLEAR LD-PE (Mould NO.:NM-65)
④	OUT JACKET	8.1g	PVC 40P COLOR:BEIGE(IV-29)(Mould NO.WM-149)
③	CONN	1	MINI DIN 6PIN FEMALE SOLDER TYPE PIN INSULATOR COLOR:BLACK
②	CONN	1	MINI DIN 6PIN MALE SOLDER TYPE PIN INSULATOR COLOR:BLACK
①	CABLE	1	NoUL 28AWG*6C+D+AL/MY JACKET:BEIGE(IV-29) OD5.0mm

RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	20.02.2017	Amy	
					Approved	20.02.2017	Amy	ASSMANN WSW-No. AK323G-2
DIM	TOL							Drawing-No. ASS 7907 CA rev00
		⓪	Drawn	20.02.2017	Amy			
Angle	TOL	Id.	Modification	Date	Name			Replace / Sheet

ASSMANN WSW components