


PC board drilling dimensions(after plating)  
(thickness ≤ 3.20±0.30mm)

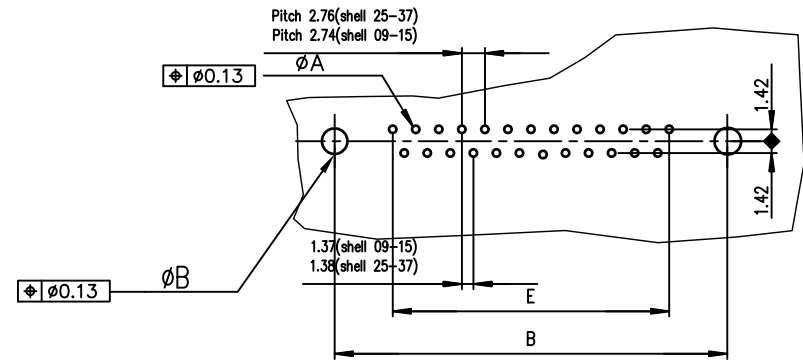

ROHS PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	Gold Flash	0.76µ Gold
09	30.81	24.99	16.96	16.21	10.96	D09S90C4GX00LF	D09S90C6GX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S90C4GX00LF	D15S90C6GX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S90C4GX00LF	D25S90C6GX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S90C4GX00LF	D37S90C6GX00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS;  
SEE DRAWING C01-8646-0001

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family D-SUB	
ltr		ecn no		dr		date		title	
G		ELX-I-21654		AB		2015-10-26		FEMALE DELTA-D LOW PROFILE STRAIGHT PRESS-FIT	
H		ELX-I-24020		AAB		2016-06-06		scale 2:1	
								dwg no	
								sheet 1 of 1	
								size	
								A3	
								type	
								Product Customer Drawing	
sheet index		revision sheet		H					
		1							