


Frame	PBT, UL94V-0	Notes
Impeller	PBT, UL94V-0	Date: 050513
Connection	Lead wires *	<u>Available Options</u> Alarm Tachometer
Motor	Brushless DC, impedance protected	
Bearing System	Sealed Sleeve	
Insulation Resistance	10M ohm between lead wire and frame (500VDC)	*Connection: UL1007 28AWG, black GND UL1007 28AWG, red Vcc
Dielectric Strength	60 seconds at 500VAC, max. leakage < 500 MicroAmp	
Temperature Range	-20C ~ +80C	
Life Expectancy	40000 hours (40C)	

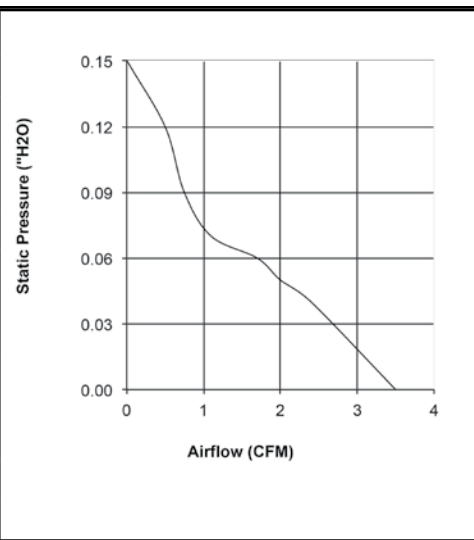

Model Number	OD3006-12HSS
Part Number	131143001
Nominal Voltage	12 VDC
Voltage Range	10.8 ~ 13.2 VDC
Current (Amps)	0.06 A
Input Power (Watts)	0.76 W
Rated Speed (RPM)	10500
Airflow (CFM)	3.5
Noise Level (dB)	32
Max. Static Pressure (" H ₂ O)	0.15