


MICRO-Interface MI-A-PSM24Vdc

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

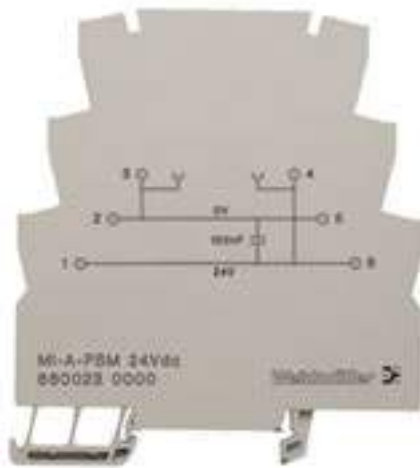

Specific adapter to be connected to the MICROSERIE RELAYS using a 10-pole flat-cable connector or 15-pole Sub-D connector.

General ordering data

Type	MI-A-PSM24Vdc
Order No.	8800230000
Version	Adapter, MICRO-Interface, IEC 60603/DIN41612 plug-in connectors, Screw connection
GTIN (EAN)	4032248497171
Qty.	10 pc(s).

Data sheet

**MICRO-Interface
MI-A-PSM24Vdc**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Length	88 mm	Width	6.1 mm
Height	97.8 mm	Net weight	32 g

Temperatures

Operating temperature	0...+50°C	Ambient temperature	0 °C...+50 °C
Storage temperature	-20...+85 °C		

Connection data

Connection on control side	IEC 60603/DIN41612 plug-in connectors	Number of poles (control side)	15-pole female
Supply voltage	max. 30 V AC/DC		

Ratings data

Operating voltage	30 V UC	Max. current per channel	0.5 A
Total operating current	2 A		

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	< 50 V AC
Surge voltage category	III	Pollution severity level	2
Insulation test voltage	0.35 kVAC		

Supply connection

Type of connection	Screw connection
--------------------	------------------

Classifications

ETIM 3.0	EC001121	eClass 6.2	27-24-22-08
eClass 7.1	27-24-22-08		

Product information

Descriptive text accessories	Cross-connectors and markers: see "Accessories"
------------------------------	---

Approvals

Approvals



ROHS	Conform
------	---------

Data sheet

**MICRO-Interface
MI-A-PSM24Vdc**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Electric symbol

