


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/25/19	E.M.



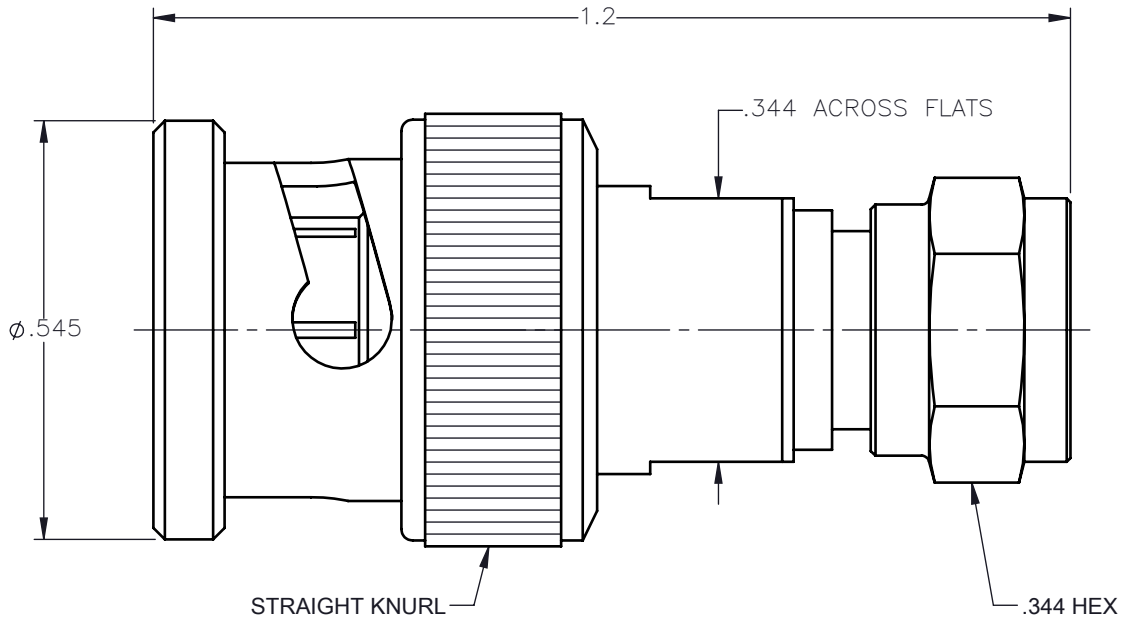

NOTES:

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. FEMALE CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. SPRING WASHER = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04, OR BERYLLIUM COPPER PER ASTM B196, ALLOY C17200, TEMPER TD02.
4. SPLIT WASHER = BRASS PER ASTM B36, ALLOY C26000, TEMPER H02 OR BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
5. GASKET = SILICONE RUBBER PER MIL-R-5847.
6. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACTS = GOLD PLATE PER ASTM B488 OR MIL-DTL-45204, TYPE II, 50µin MIN, GRADE C, OVER 100 TO 200µin SULFAMATE OR ELECTROLYTIC NICKEL PER AMS-QQ-N-290.
2. ALL OTHER METAL PARTS EXCEPT SPRING WASHER = GOLD PLATE PER ASTM B488 OR MIL-DTL-45204, TYPE II, 30µin MIN, GRADE C, OVER 100 TO 200µin COPPER STRIKE PER AMS 2418.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: E.M.	DATE: 02/25/19	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.		
	CHKD: J.S.	DATE: 02/25/19			
DECIMAL	ANGLE	APVD: J.M.	BNC MALE TO SCREW-ON 75 OHM FEMALE ADAPTER		
		DATE: 02/25/19			
REFERENCE:	MATERIAL & FINISHES:	SIZE: A	FSCM NO.: 19505	DWG NO.: 5407-1501-000	REV: A
ORIGINATED: E.M. DATE: 02/25/19	SEE NOTES	SCALE: 4:1	THIRD ANGLE PROJECTION		SHEET 1 OF 1

5407-1501-000