

Product data sheet

Specifications



Jumper cable XZ, male straight M8 3 pin, female straight M8 3 pin, PUR 2 m

XZCR2705037R2

Main

Accessory / separate part category Cabling accessory

Accessory / separate part type Jumper cable

Complementary

Jumper cable end 1 M8 male 3 pins straight connector with screw-on

Jumper cable end 2 M8 female 3 pins straight connector with screw-on

Collar material Metal

Cable composition 3 x 0.34 mm²

Cable length 2 m

Wire insulation material PUR

Cable outer diameter 5.2 mm

[Ue] rated operational voltage 45 V DC
60 V AC

[In] rated current 4 A

Insulation resistance ≥ 1000 MOhm

Maximum resistance across terminals 5000 mOhm

Product weight 0.09 kg

Environment

IP degree of protection IP69K
IP65
IP67

Product certifications cULus

Ambient air temperature for operation -35...90 °C static
-5...90 °C flexing

Ambient air temperature for storage -35...100 °C

Packing Units

Unit Type of Package 1 PCE

Number of Units in Package 1 1

Package 1 Height	2.0 cm
Package 1 Width	18.0 cm
Package 1 Length	18.0 cm
Package 1 Weight	61.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	40
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	2.808 kg


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

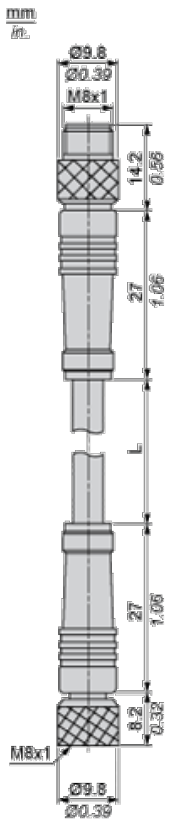

L : Length of cable

Connections and Schemes

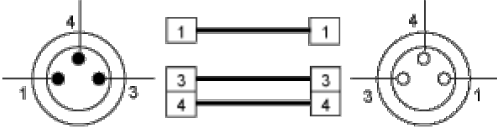

Recommended replacement(s)