


### MQS

TE Internal #: 1534358-1 Automotive Connector Locks & Position Assurance, Retainer, Violet, PBT GF, -40 – 120 °C [-40 – 248 °F], MQS

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Connector Accessories > Automotive Connector Locks & Position Assurance

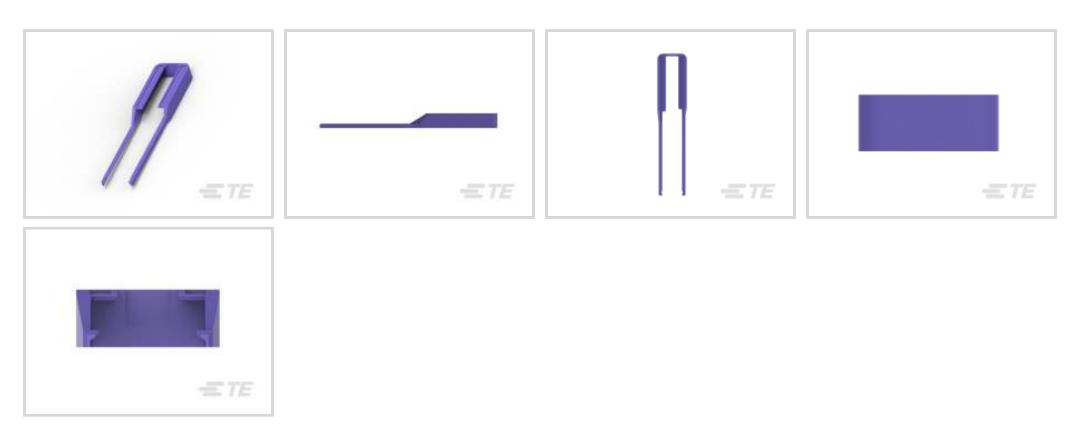

Connector & Contact Retention Accessory Type: Retainer

Primary Product Color: Violet

Primary Product Material: **PBT GF** 

Operating Temperature Range: -40 – 120 °C [-40 – 248 °F]

# Features

### **Product Type Features**

Connector & Contact Retention Accessory Type	Retainer			
Body Features				
Primary Product Color	Violet			
Primary Product Material	PBT GF			
Usage Conditions				
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]			
Industry Standards				
UL Flammability Rating	UL 94HB			
Other				
Serviceable	No			
Product Compliance				
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			

**C** For support call+1 800 522 6752

### 1534358-1

Automotive Connector Locks & Position Assurance, Retainer, Violet, PBT GF, -40 – 120 °C [-40 – 248 °F], MQS



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	

Solder Process Capability

Not applicable for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




# Also in the Series | MQS

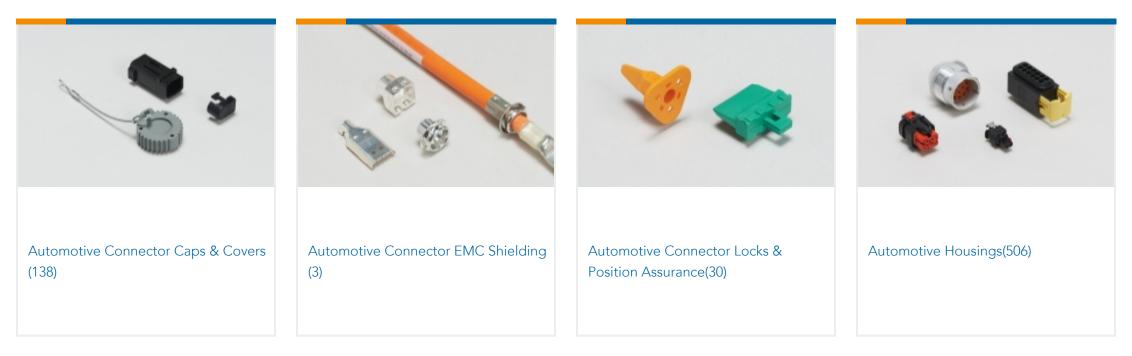

## 1534358-1

Automotive Connector Locks & Position Assurance, Retainer, Violet, PBT GF, -40 – 120 °C [-40 – 248 °F], MQS



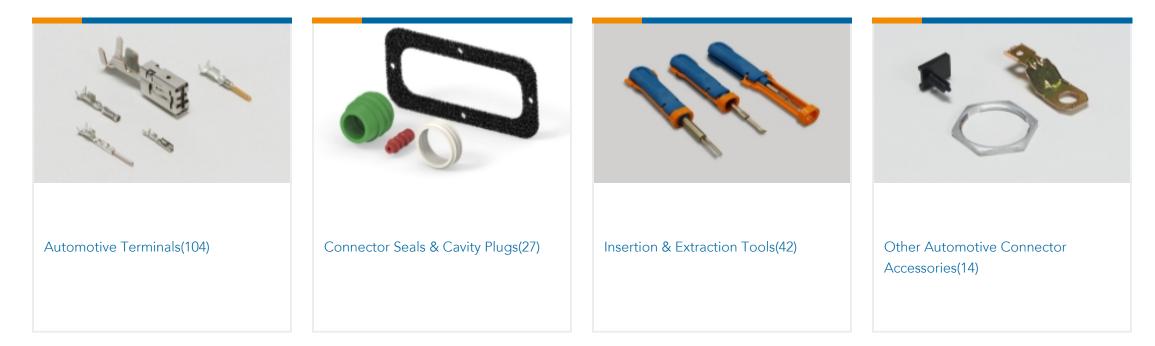



PCB Headers & Receptacles(214)

# Customers Also Bought



TE Part #1452915-2	TE Part #1-85202-3	TE Part #1318825-7	TE Part #1-1452920-1
30POS MIXED MQS REC SEALED	JPT 2P ASSY D/GRAY CODE B	MULTILOCK, CONNECTOR HOUSING	COVER ASSY FOR 30 POS EPB CONN
TE	THE REPORT OF	THE REPORT OF	
TE Part #1544964-1	TE Part #1452920-1	TE Part #1544650-1	TE Part #1544650-3
8MM NG1+ TERMINAL	30 POS CONNECTOR COVER ASSY	PC 2V 8NG1 NOIR JT	PC 2V 8NG1 GRIS JT



# Documents

# 1534358-1

Automotive Connector Locks & Position Assurance, Retainer, Violet, PBT GF, -40 – 120 °C [-40 – 248 °F], MQS



### **Product Drawings**

#### RETAINER

English

### **CAD** Files

Customer View Model

### ENG\_CVM\_CVM\_1534358-1\_A.2d\_dxf.zip

English

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1534358-1\_A.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_1534358-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Product Specifications Application Specification

English