

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS in. [mm]				
		L ± [0,5]	W ± [0,3]	C ± [0,5]	M ± [0,5]	H ± [0,3]
P10-6LF	#6	.77 [19,6]	.30 [7,6]	.23 [5,8]	.53 [13,5]	.14 [3,6]
P10-8LF	#8	.79 [20,1]	.30 [7,6]	.23 [5,8]	.53 [13,5]	.16 [4,1]
P10-10LF	#10	.79 [20,1]	.34 [8,6]	.23 [5,8]	.53 [13,5]	.19 [4,8]
P10-14LF	1/4"	.92 [23,4]	.46 [11,7]	.33 [8,4]	.63 [16,0]	.25 [6,4]

UL & CSA TOOLS


CT-100A
CT-200
CT-600-A (CT-570CH)
CT-1570
CT-1701 (P10)
CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS

CT-160
CT-260

NOTES:

- UL LISTED & CSA CERTIFIED FOR:
 - #14-10 AWG [2,5-6,0 mm²] SOLID OR STRANDED COPPER WIRE
 - 302°F [150°C] MAX OPERATING TEMPERATURE
 - 2000 VOLTS MAX
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- MATERIAL:
 - STAMPING: .04" [1,0] THK COPPER, TIN PLATED
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- WIRE STRIP LENGTH: $9/32" \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,1mm^{+0,8}₋₀]

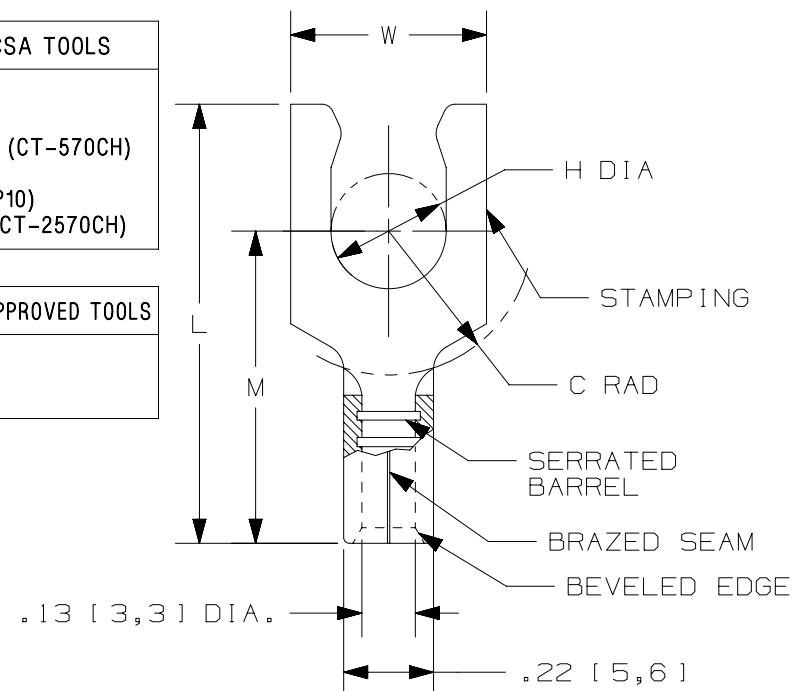

LISTED
587H
E52164



CERTIFIED
LR31212

TITLE		LOCKING FORK TERMINALS, NON- INSULATED, #14-10	
CUSTOMER DRAWING			
ITEM REVISION NAME	N41287BA/11		
DATASET FILE NAME	N41287BA_DC/10A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
$.X \pm$ $.XX \pm$		$.XXX \pm$ ANGLES $\pm$	
		THIRD ANGLE PROJECTION	
DRAWN BY	DATE	CHK	SCALE
DAW	-	-	N.T.S.
DRAWING NUMBER: A41287		SHEET 1 OF 1	
REV		SIZE A	