


- 1 USE A P.C.B. WHOSE SURFACES ARE TREATED WITH SOLDER RESIST. SHOW P.C.B LAYOUT FROM THE CONNECTOR-MOUNTING SURFACE SIDE. NUMBER THE CONTACTS IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM THE -BSC- SIDE.
- 2
- 3
- 4 WHEN SCREWING THE CONNECTOR TO THE P.C.B, USE M2 SCREW, NUT AND WASHERS.
- △ HOUSING MATERIAL : GLASS 20% FILLED P.B.T RESIN (UL94-V0). COLOR:BLACK
- △ CONTACT MATERIAL : PHOSPHOR BRONZE.
- △ FINISH : NICKEL 0.00127 MIN THK OVERALL SELECTIVE GOLD 0.00076 MIN THK ON CONTACT AREA AND TIN 0.001MIN THK ON TINE AREA.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	6	8	96	47	59.61	63.86	67.09	73.09
OBSOLETE	6	6	48	23	29.21	33.38	36.61	42.61
	6	5	34	16	20.32	24.49	27.72	33.72
	6	4	60	29	36.83	41.00	44.23	50.23
OBSOLETE	6	3	50	24	30.48	34.65	37.88	43.88
	6	2	40	19	24.13	28.30	31.53	37.53
OBSOLETE	6	1	30	14	17.78	21.95	25.18	31.18
	P/N	POS	n	A	B	C	D	

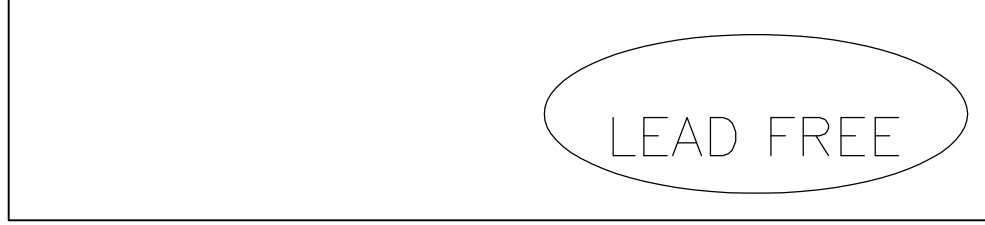

GENERAL TOLERANCE
 10 ≥ : ±0.2
 30 ≥ > 10: ±0.25
 100 ≥ > 30: ±0.3
 ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN COREL WANG 20AUG2004	STE TE Connectivity
		CHK STEVEN YAO 23AUG2004	
		APVD I.ENOMOTO 23AUG2004	
		NAME	
MATERIAL 参照 △△	FINISH 参照 - △	PRODUCT SPEC 108-10036	PLUG ASSY HORIZONTAL AMPLIMITE .050 SERIES I B-TO-B CONN.
		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		WEIGHT	A3 00779 C-5173277
		CUSTOMER DRAWING	SCALE 2:1 SHEET 2 OF 2 REV B