


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	A	REVISE PER 0A00-0379-95	9-27-95	SU NM

1. DIMENSIONS IN [] ARE IN INCHES.
2. FIXED SHROUD DUPLEX CONNECTOR WITHOUT KEY IS TYPE S.

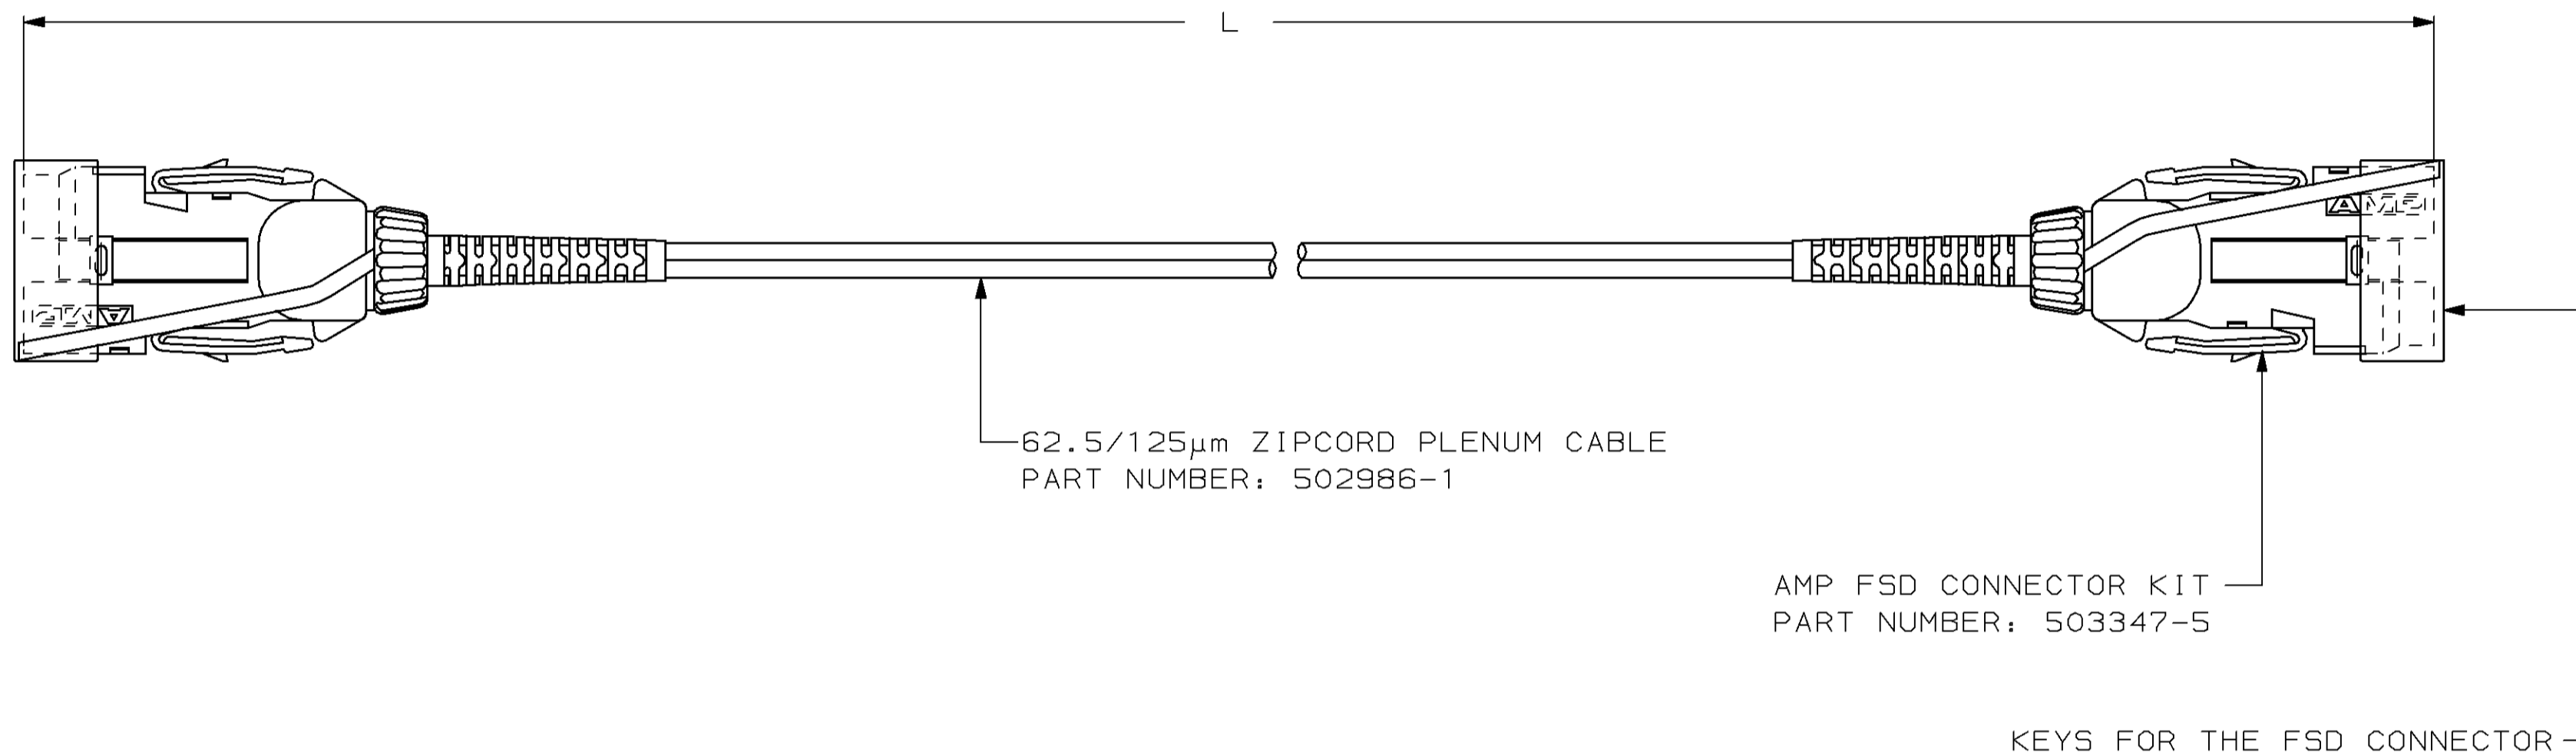

KEYS FOR THE FSD CONNECTOR

10±0.15 [394±6]	504625-5
5±0.08 [197±3]	504625-4
3±0.05 [118±2]	504625-3
2±0.05 [79±2]	504625-2
1±0.05 [39±2]	504625-1
L	PART NUMBER



DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		OWN	DATE	AMP Incorporated		
METERS		0 PLC ±-		S. URICH	15JUN95	Harrisburg, PA 17105-3608		
		1 PLC ±-		CHK R. PAUL	16JUN95	CABLE ASSEMBLY, FIBER OPTIC, 62.5/125µm ZIP PLENUM, AMP POLYMER FSD TO AMP POLYMER FSD, OPTIMATE®		
		2 PLC ±-		APVD N. MILLER	16JUN95			
		3 PLC ±-		PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO
		4 PLC ±-		APPLICATION SPEC		A2	00779	©=504625
MATERIAL		ANGLES ±-		WEIGHT		SCALE	SHEET	OF
		FINISH ±-		CUSTOMER DRAWING		NTS	1	1
								REV
								A