
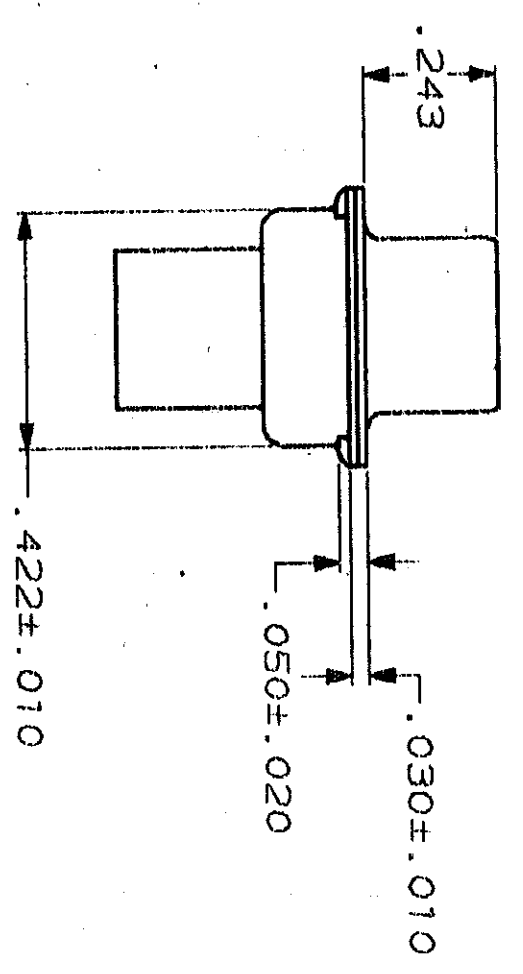
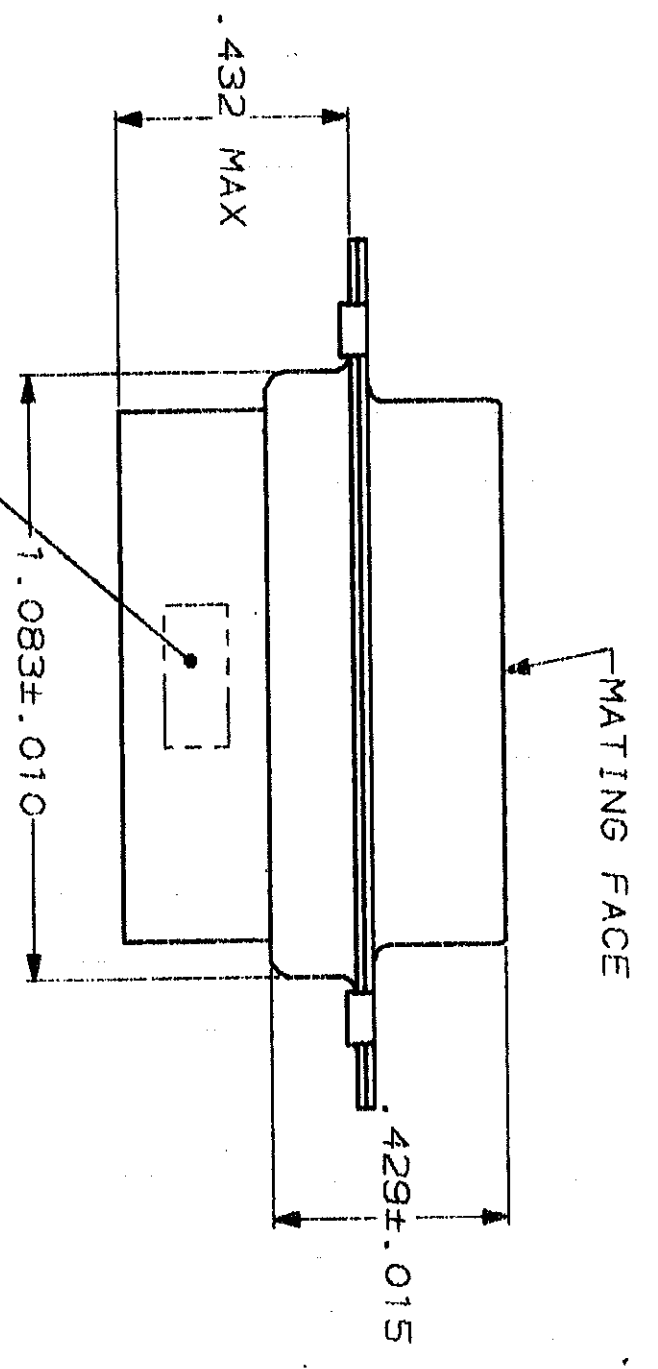


LOC	DIST	ZONE	LTR	REVISIONS	DATE	APPD
BD	39			REL WAS 87-4870-14		

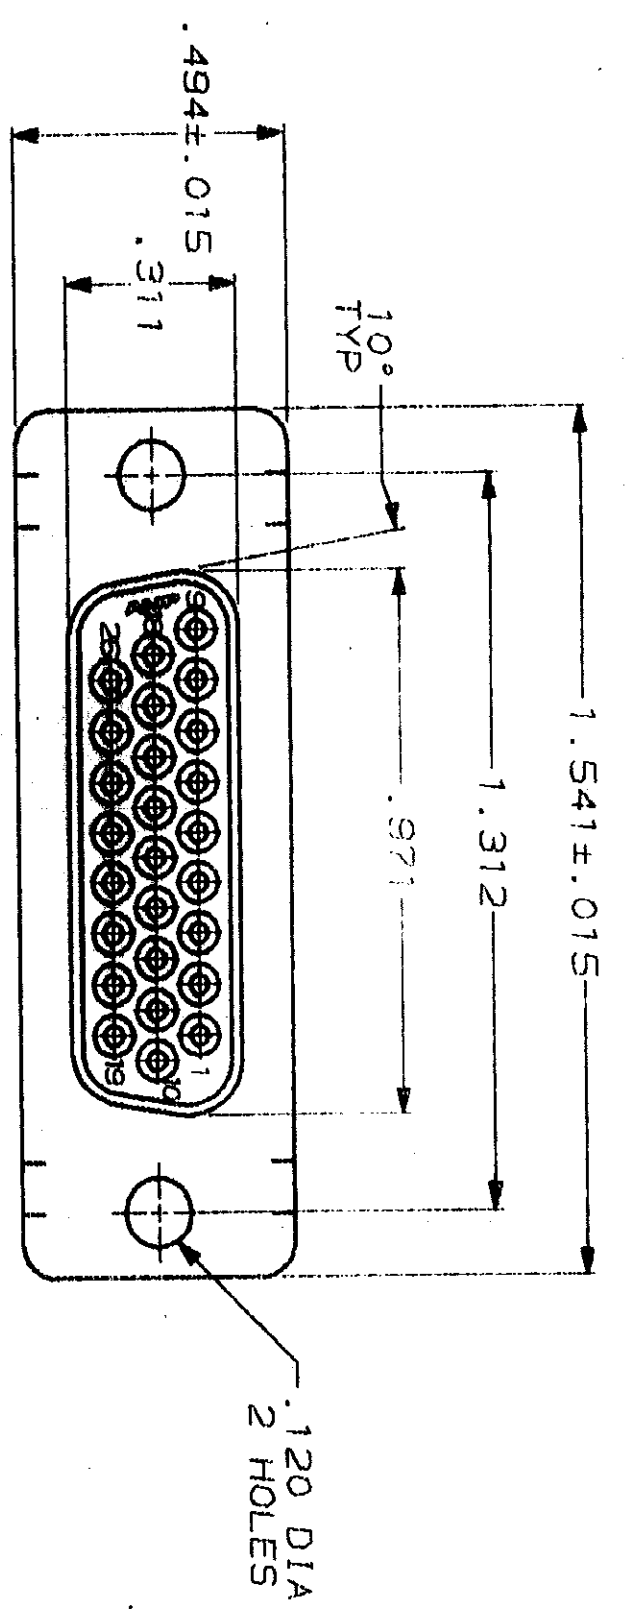

1. CONNECTOR ACCEPTS SIZE 22 DF SOCKET CONTACTS, RETENTION TINNES ARE AN INTEGRAL PART OF INSERT.
2. FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
3. STEEL PER ASTM A109.
4. TIN PLATED PER MIL-T-10727.

AMP, PART NO & DATE CODE, MARKED IN AREA INDICATED, ON FAR SIDE

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON:		DR	1/12/88	
1. PLC DEC ± .005		CHK	1-14-88	
2. PLC DEC ± .005		APPD	1/1/88	
3. PLC DEC ± .005		APPD	1/1/88	
MATERIAL MOULDED PARTS: Δ		NAME	AMP INCORPORATED	
SHELLS: Δ		RECEPTACLE CONNECTOR, SIZE 2, 26 POSN, AMPLIMITED HDP-22	Harrisburg, Pa. 17105	
FINISH SHELLS: Δ	APPLICATION SPEC	SIZE	FSCM NO	DRAWING NO
		C	00779	748566
WEIGHT		SCALE	3:1	SHEET 1 OF 1

748566-1
PART NO

748566

CUSTOMER DRAWING